

Active Frequency Multiplier

WR-12/X6/70-80GHz/28dBm Output Power

Model: TMAM-070080-0628-12

TMAM-070080-0628-12 is an active X6 frequency multiplier. The multiplier has an input frequency of 11.66 to 13.34 GHz with a typical input power of +5 dBm and an output frequency of 70 to 80GHz with a typical output power of +28 dBm. The DC power requirement for the multiplier is +17 V DC/670 mA. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U-M anti-cocking flange.

Features:

- Output Frequency:70-80GHz
- Output Power :28dBm Typ
- Low power consumption

Applications:

- Frequency Extenders
- THz Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output Frequency	70		80	GHz
Output Power		28		dBm
Input Frequency	11.66		13.34	GHz
Input Power	3	5	7	dBm
Harmonic		-20		dBc
Multiply Factor		6		
DC Voltage		17		V
DC Supply Current		670		mA

Mechanical Specifications:


Parameter	Value	Units
Output Connector	WR-12/UG-387/U	
Input Connector	SMA Female	
DC Bias	Solder Pin	
Size	50*28*23(Without Heatsink) 50*70*43(With Heatsink)	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+17.5 V
RF Input Power	+10 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

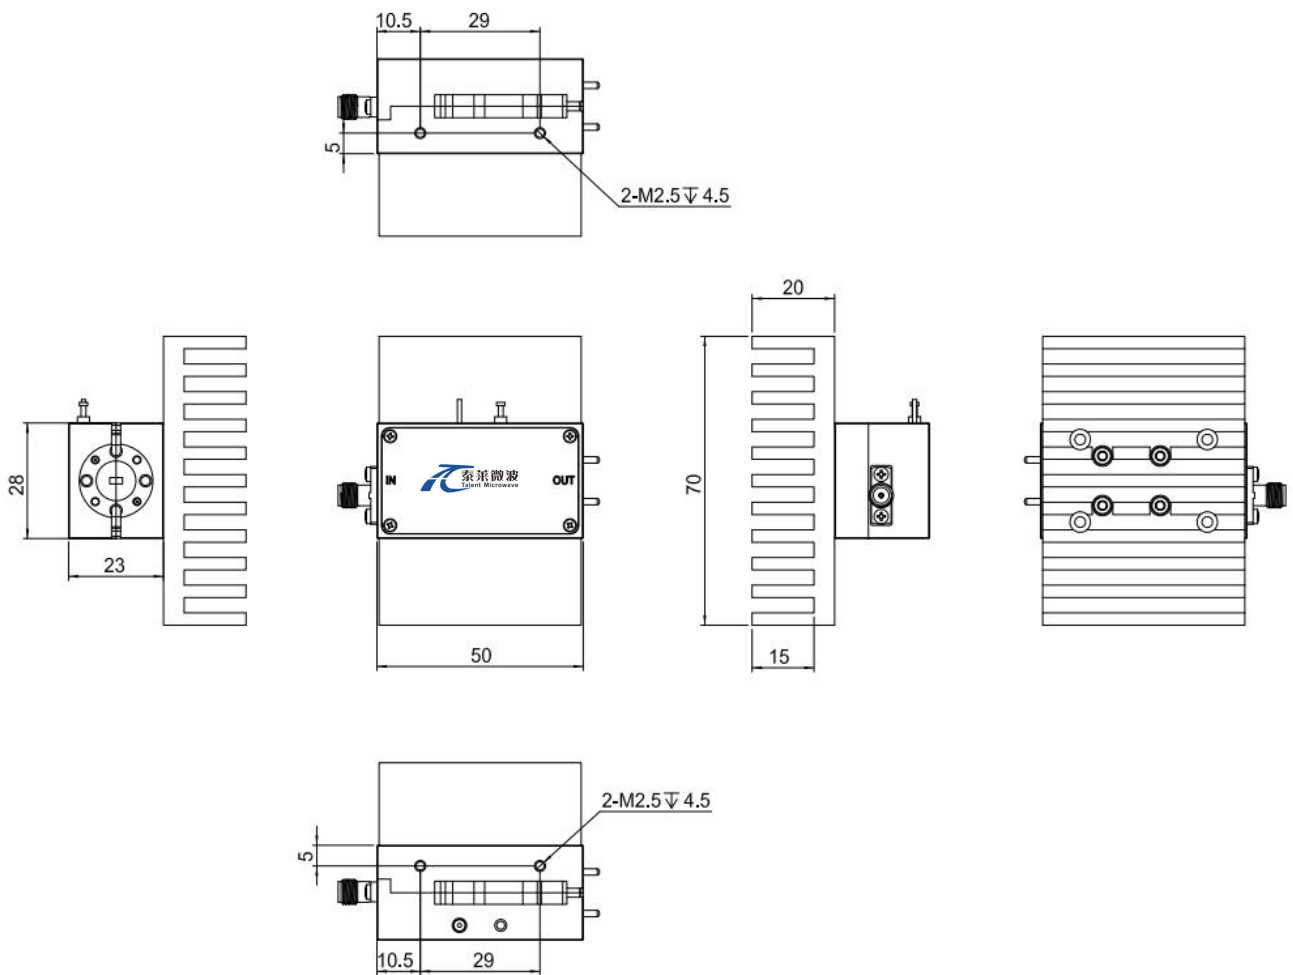

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Desciption	Revision
TMAM-070080-0628-12	Active Multiplier,X6,70-80GHz, Output Power:28dBm,WR-12/UG-387/U,SMA Female	Rev.1.1


Typical Performance Data:

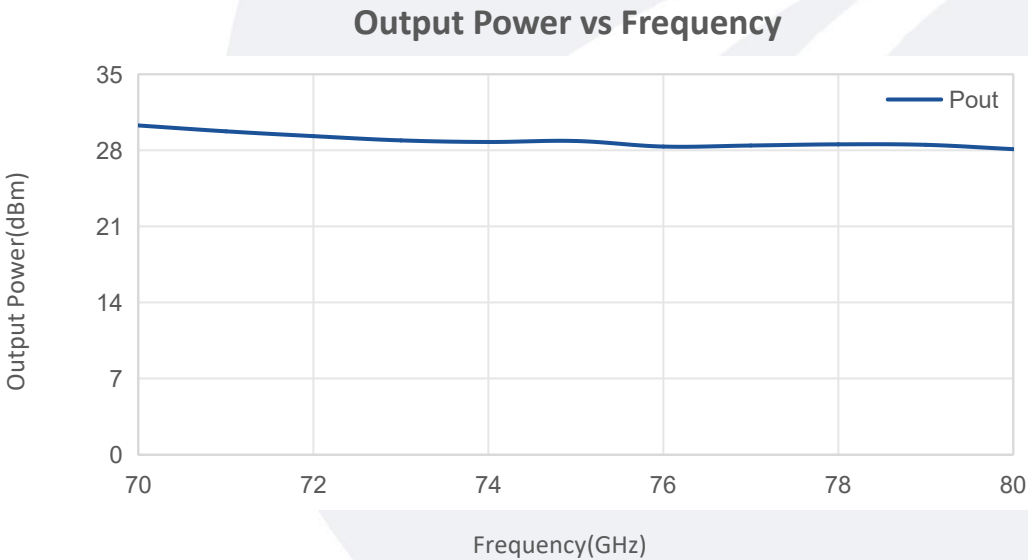

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Harmonic Suppression vs Frequency

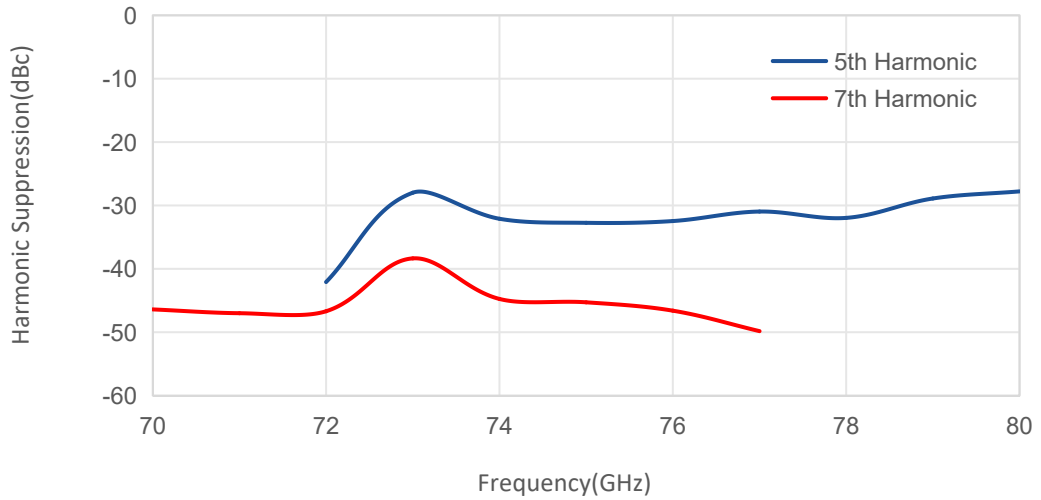

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.