

V-Band VNA Frequency Extender

50-75GHz /WR-15

Model: TLVE-5075-16-A/TLVE-5075-16

TLVE-5075-16 frequency extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 50-75 GHz.

Features:

- Ultra Wide Band: 50-75 GHz
- Port Output Power (No Attenuation): 16 dBm Typ
- Dynamic Range @ 10 Hz BW: 110dB Typ
- Unconditional stability

Applications:

- VNA Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
Test Port Output Power		16		dBm
Test Port Input Power (Damage)			20	dBm
Output Power Attenuation (Option:Variable attenuators)	0		30	dB
Dynamic Range @ 10Hz BW	100	110		dB
Directivity		30		dB
RF Input Frequency	12.5		18.75	GHz
RF Input Power	3	5	7	dBm
RF Multiplication Factor		4		
LO Input Frequency	12.5		18.75	GHz
LO Input Power	3	5	7	dBm
LO Multiplication Factor		4		
IF Frequency Range	1		1000	MHz
Amplitude stability @300 Hz BW		±0.1		dB
Phase Stability @300 Hz BW		±2.5		°

机械特性 Mechanical Specifications:


Parameter	Value
RF/LO Input Connector	SMA Female
MEA/REF IF Output Connector	SMA Female
Test Port Connector	WR-15/UG-385/U
Power Supply Pin	FGG 0B 4 Core
Size	242*81*46.2mm

Absolute Maximum Ratings :

Description	Parameter	Units
Test Port Input Power	+20	dBm
RF/LO Port Damage Level	+10	dBm
Supply Bias Voltage	+240 V AC	
ESD sensitivity (Hbm)	Class 0, passed 150V	

Outline Drawing:

Unit:mm

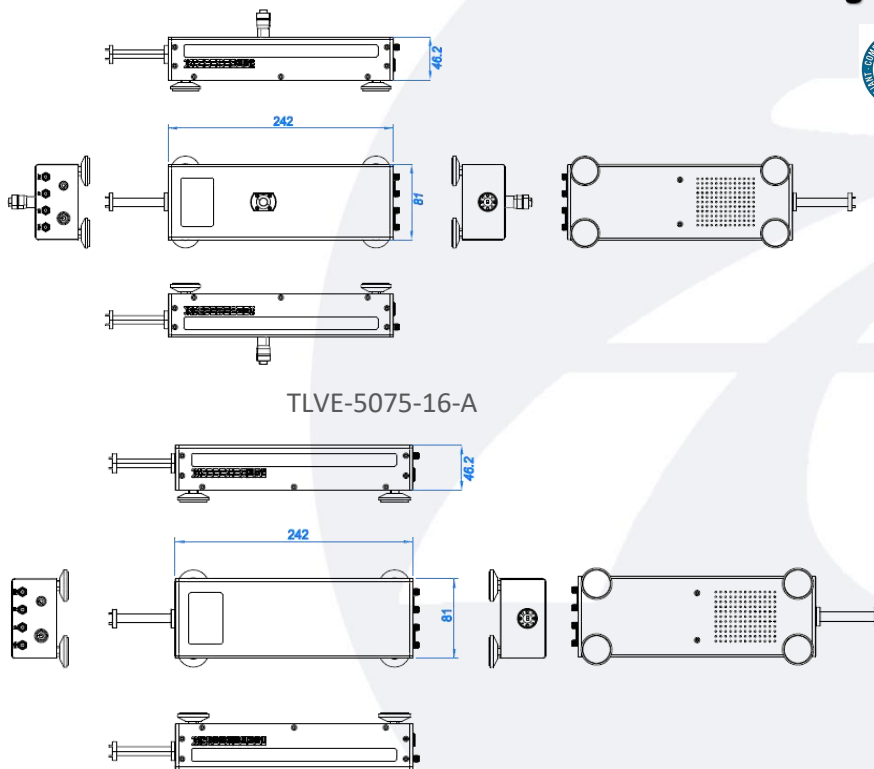


TLVE-5075-16-A

TLVE-5075-16

Regulatory Compliance:



Block Diagrams:

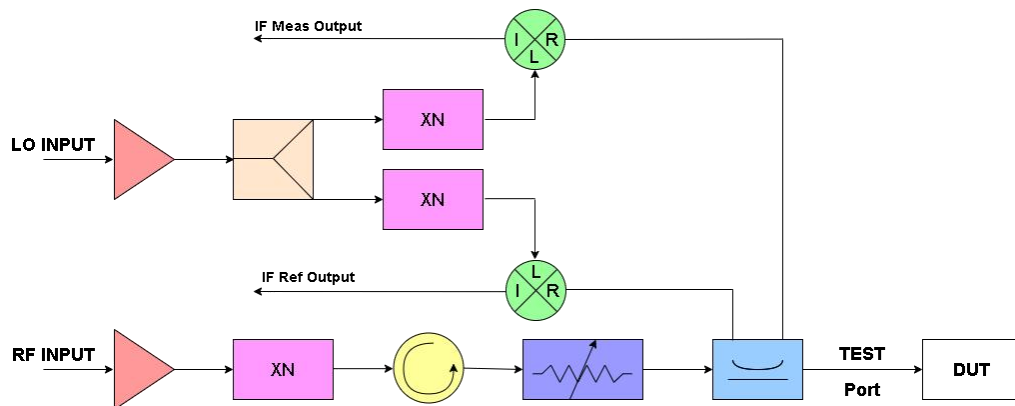

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	0 To +45	°C
Storage Temperature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	

Ordering Information:

Part Number	Description	Revision
TLVE-5075-16	G-band VNA Frequency Extender, 50-75 GHz, Output Power:16 dBm typ., Dynamic Range:110 dB typ.,Magnitude Stability @ 300 Hz BW:±0.1dB,Phase Stability @ 300 Hz BW:±2.5°	Rev.1.2
TLVE-5075-16-A	G-band VNA Frequency Extender, 50-75 GHz, Output Power:16 dBm typ., Dynamic Range:110 dB typ.,Magnitude Stability @ 300 Hz BW:±0.1dB,Phase Stability @ 300 Hz BW:±2.5°,with Micrometer driven variable attenuators	Rev.1.2

Components Included:

Part Number	Description	数量 Quantity
S1-SMAMSMAM-1.2m	COAXIAL CABLE ASSEMBLY	4 PCS
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Notes:

1. Dimensions and specifications may be changed without prior notice.
2. Standard Warranty:three years.