泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Power Amplifier

2-8GHz/40dB Gain/40dBm Psat

Model: TLPA2G8G-40-40

TLPA2G8G-40-40 is a power amplifier with minimum power gain of 40 dB and a minimum Psat of 40 dBm across the frequency range of 2 to 8 GHz. The DC power requirement for the amplifier is +28 VDC/80W. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 2-8GHz
- Gain: 40dB Min
- Output Power Psat: 40dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range		2-8		GHz
Power Gain	40			dB
Gain Flatness		±2		dB
Output Psat	40			dBm
Spurious@Pout=40dBm			-60	dBc
2nd Harmonic@Pout=40dBm			-10	dBc
Input VSWR			2	:1
DC Voltage		28		V DC
Power Consumption			80	W
Impedance		50		Ohms

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	SMA Female/SMA Female	
DC Bias	Feedthru capacitors	
Size	60*60*11(Without heatsink) 188*125*146(With heatsink)	mm
Weight	≤200	g

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+29 V
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

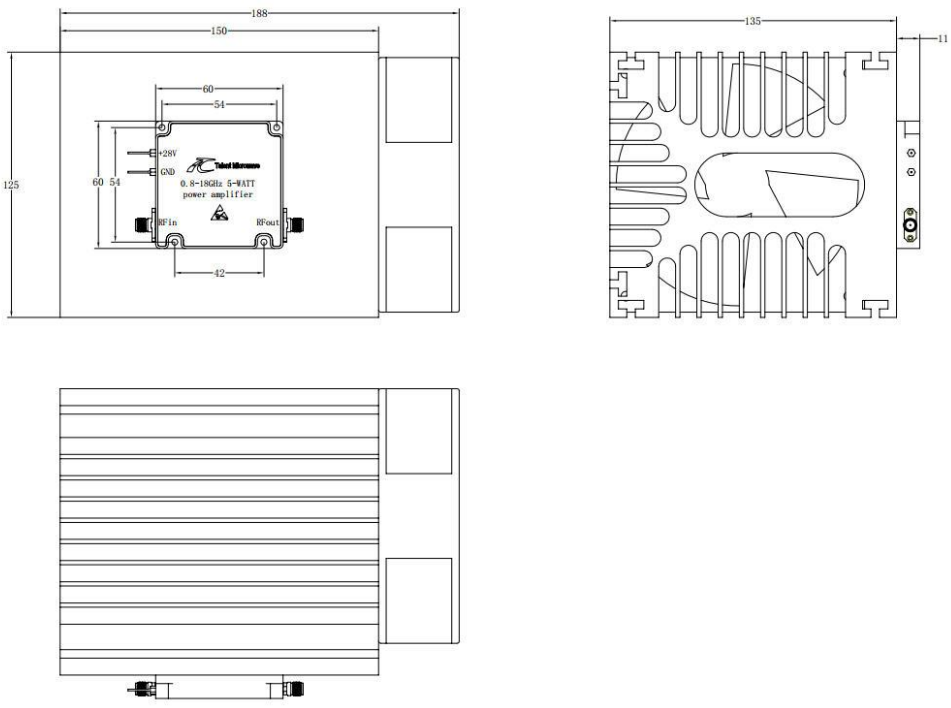

Regulatory Compliance:

***Heat Sink Required During Operation

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-40		+50	℃
Non-operating Temperature*	-50		+60	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA2G8G-40-40	Power amplifier 2-8GHz, Gain:40dB,Psat:40dBm,+28V DC,Without Heatsink	Rev.1.1
TLPA2G8G-40-40-HS	Power amplifier 2-8GHz, Gain:40dB,Psat:40dBm,+28V DC,With Heatsink	Rev.1.1

Typical Performance Data:

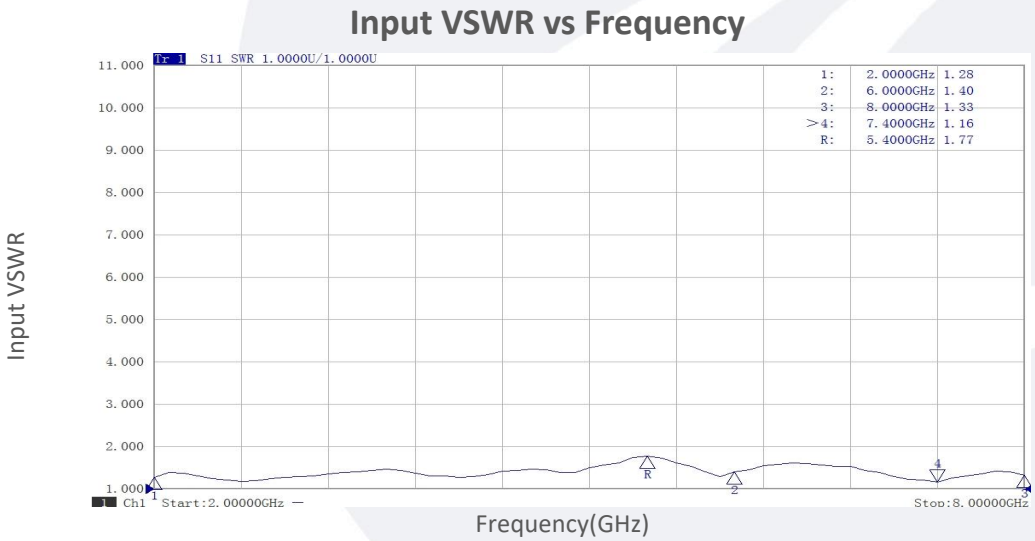

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Small Signal Gain vs Frequency

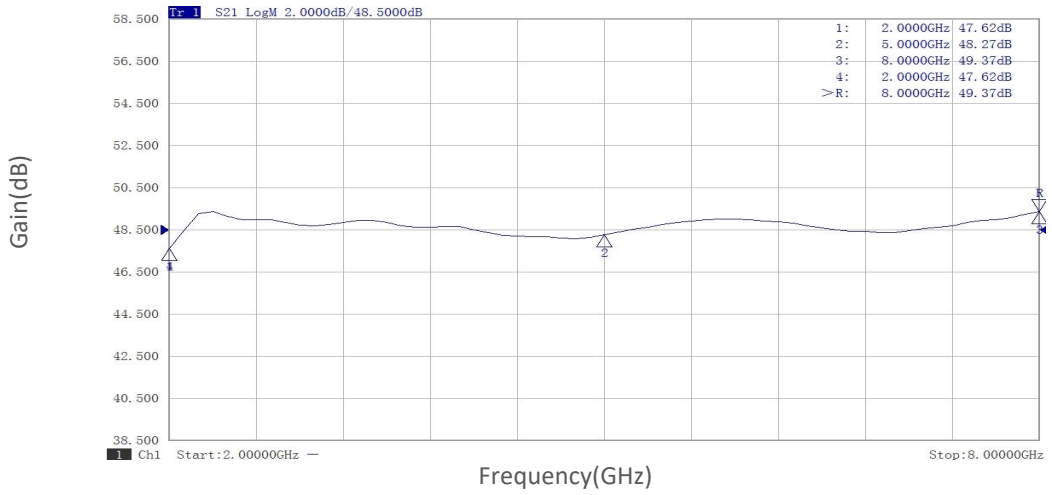

P1dB vs Frequency

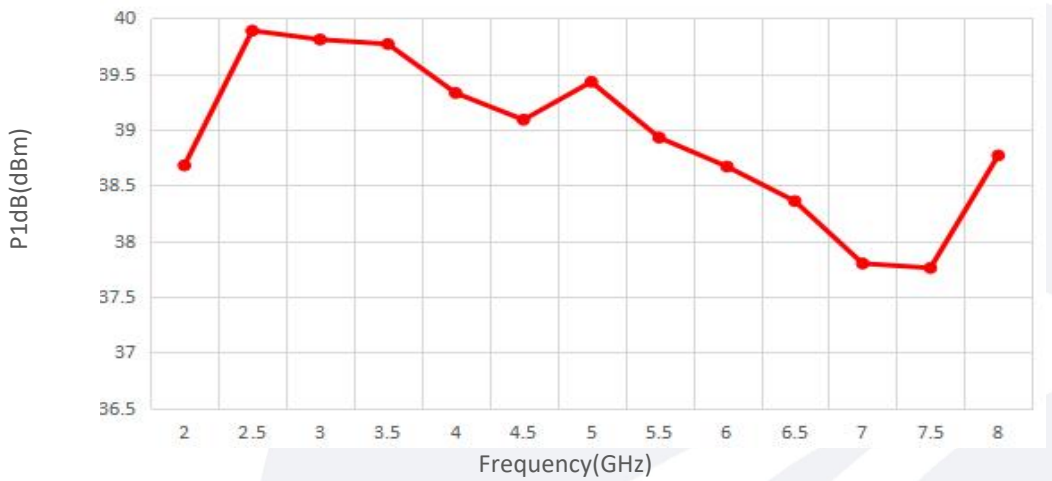

Pout@Pin

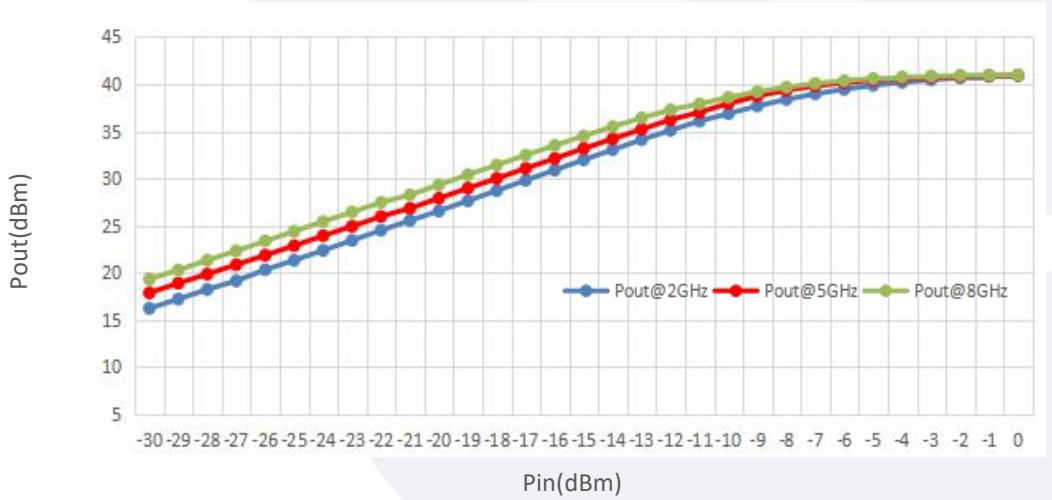

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

Pout@Equal_Pin

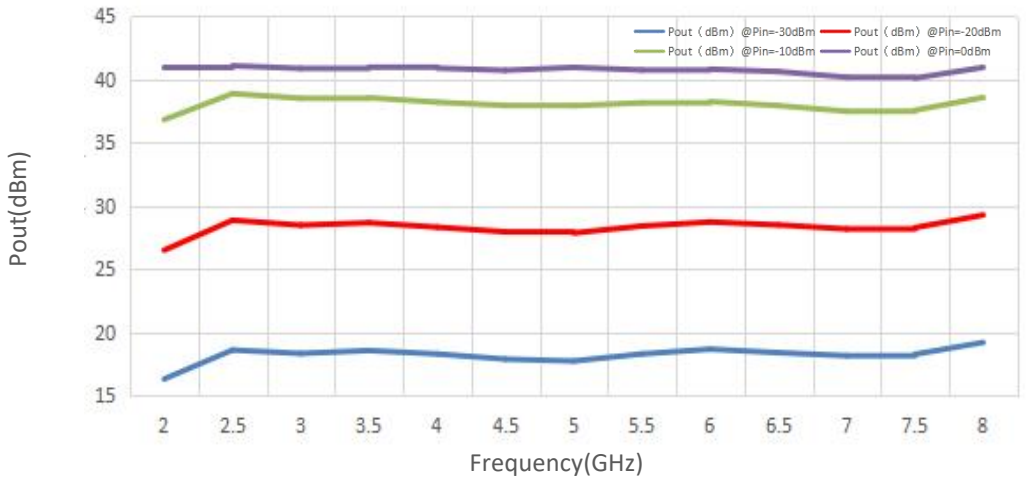

Spurious vs Frequency

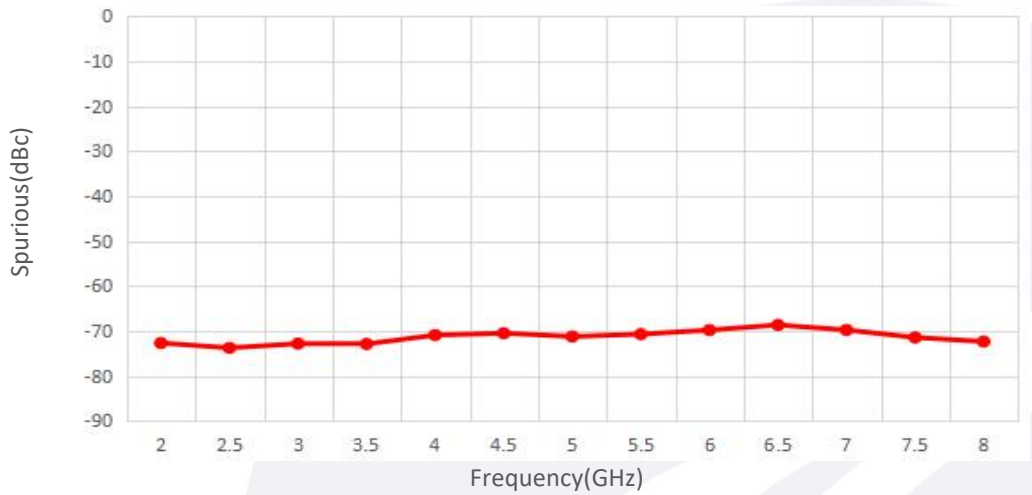

Harmonic vs Frequency

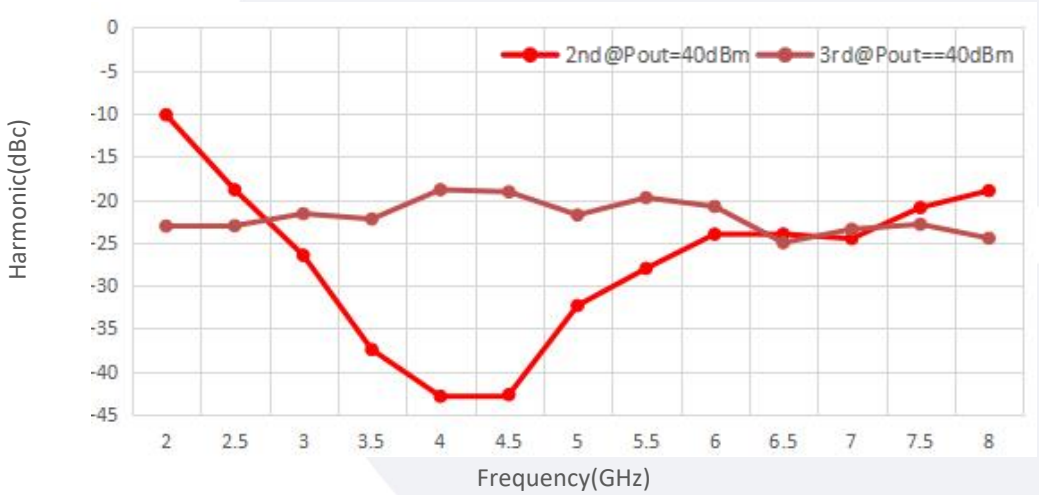

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.