

E-band,Active Frequency Multiplier

WR-12/X6/ 71-86GHz /13dBm Output Power

Model: TMAM-071086-0613-12

TMAM-071086-0613-12 is an active X6 frequency multiplier. The multiplier has an input frequency of 11.83 to 14.33 GHz with a typical input power of +5 dBm and an output frequency of 71 to 86 GHz with a typical output power of +13 dBm. The DC power requirement for the multiplier is +5 V DC. The input port configuration is a female SMA connector and the output is a WR-12 waveguide with a UG-387/U-M anti-cocking flange.

Features:

- Output Frequency:71-86GHz
- Output Power :13dBm Typ
- Low power consumption

Applications:

- Frequency Extenders
- THz Systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Output Frequency	71		86	GHz
Output Power		13		dBm
Input Frequency	11.83		14.33	GHz
Input Power	3	5	10	dBm
Multiply Factor		6		
Harmonic Suppression			-20	dBc
DC Voltage		5		V
DC Supply Current		150		mA

Mechanical Specifications:


Parameter	Value	Units
Output Connector	WR-12/UG-387/U	
Input Connector	SMA Female	
DC Bias	Solder Pin	
Size	38*25*20	mm

Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+8 V
RF Input Power	+12 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

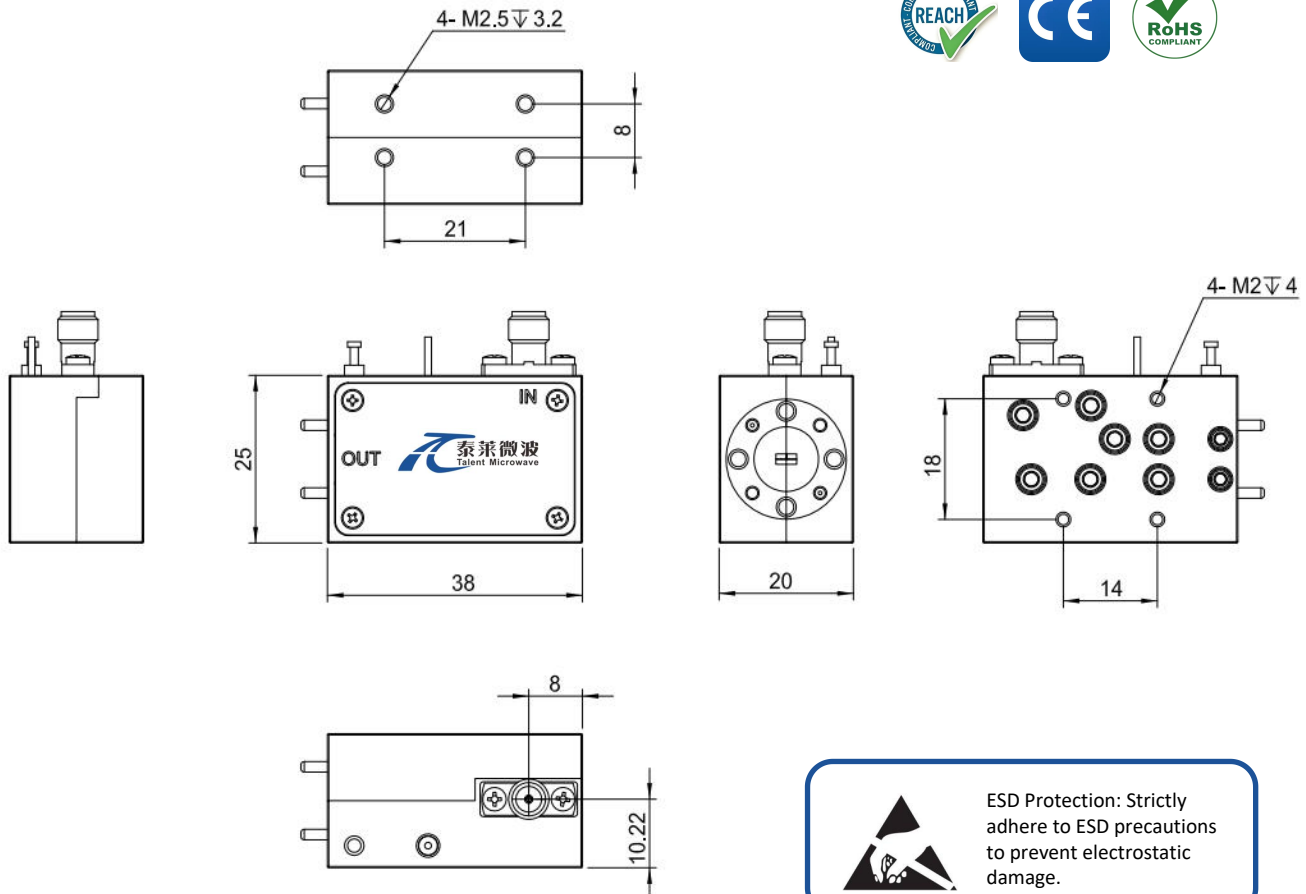

Regulatory Compliance:



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TMAM-071086-0613-12	Active Multiplier,X6,71-86GHz, Output Power:13dBm,WR-12/UG-387/U,SMA Female	Rev.1.1

Typical Performance Data:


Output Power@Pin

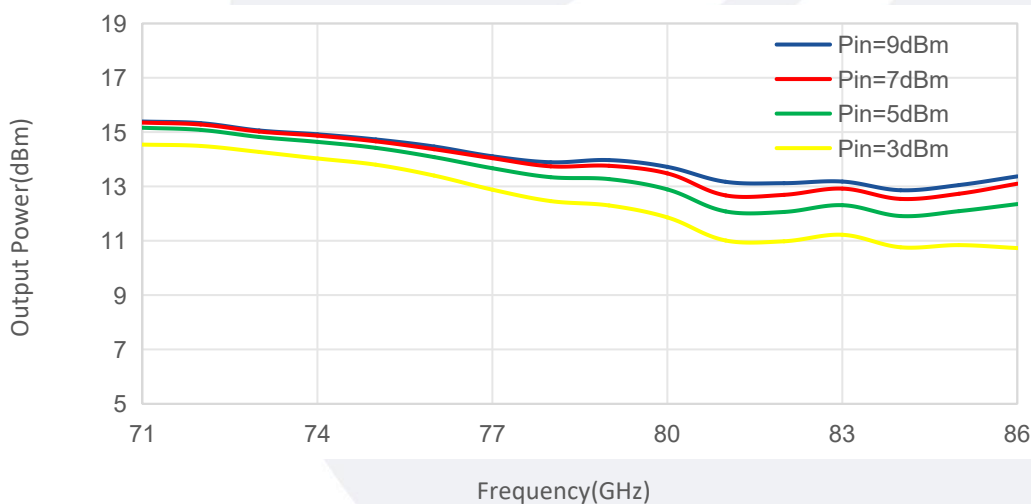

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

Harmonic Suppression vs Frequency

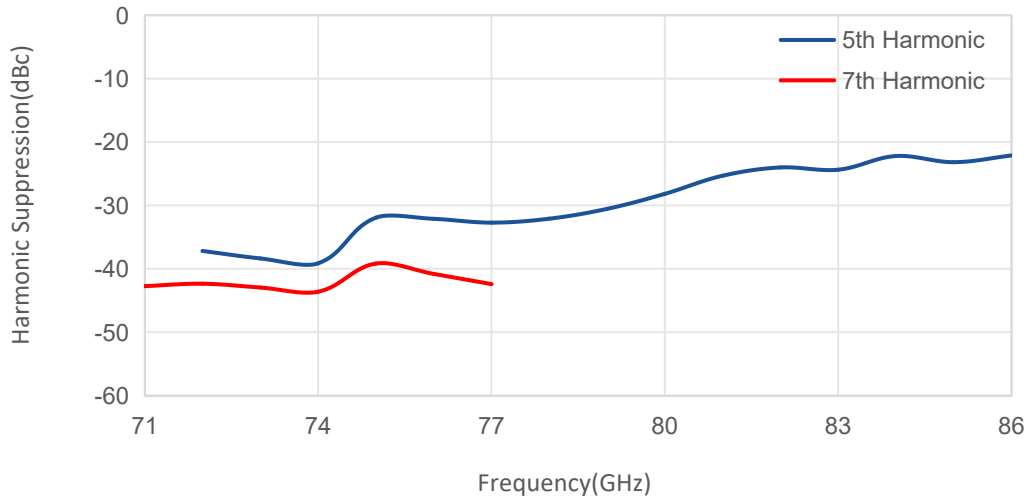

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.