

Coaxial High-pass Filter

1-3 GHz/SMA Female

Model: TLHF-1G-3G-L

TLHF-1G-3G-L is a coaxial High-pass filter with a passband frequency from 1 to 3 GHz and a rejection frequency at 780 GHz. The maximum insertion loss of the filter is 2.2 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 1 to 3GHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1		3	GHz
Passband Insertion Loss			2.2	dB
Pass Band Ripple			2.0	dB
VSWR			1.6	:1
Rejection@780MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40	mm

Outline Drawing:

Unit:mm

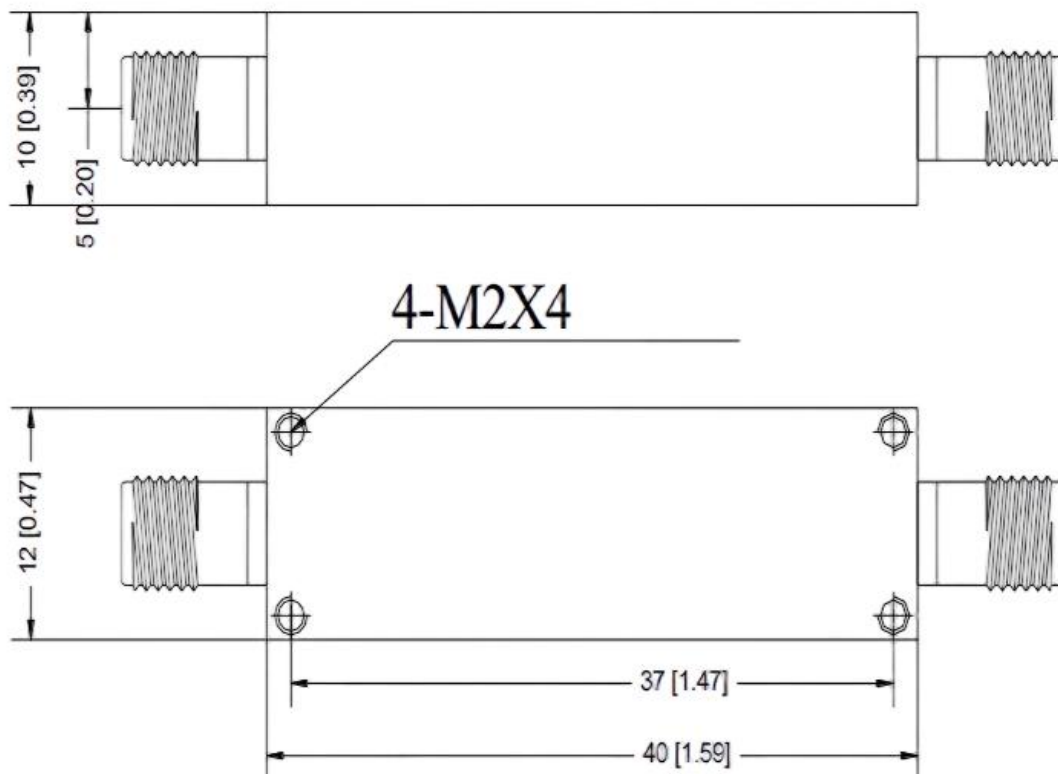


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLHF-1G-3G-L	Coaxial High-pass Filter, Passband frequency range:1-3GHz, Passband Insertion Loss:2.2dB, SMA Female Coaxial Fixed Termination	Rev.1.1

Typical Performance Data:

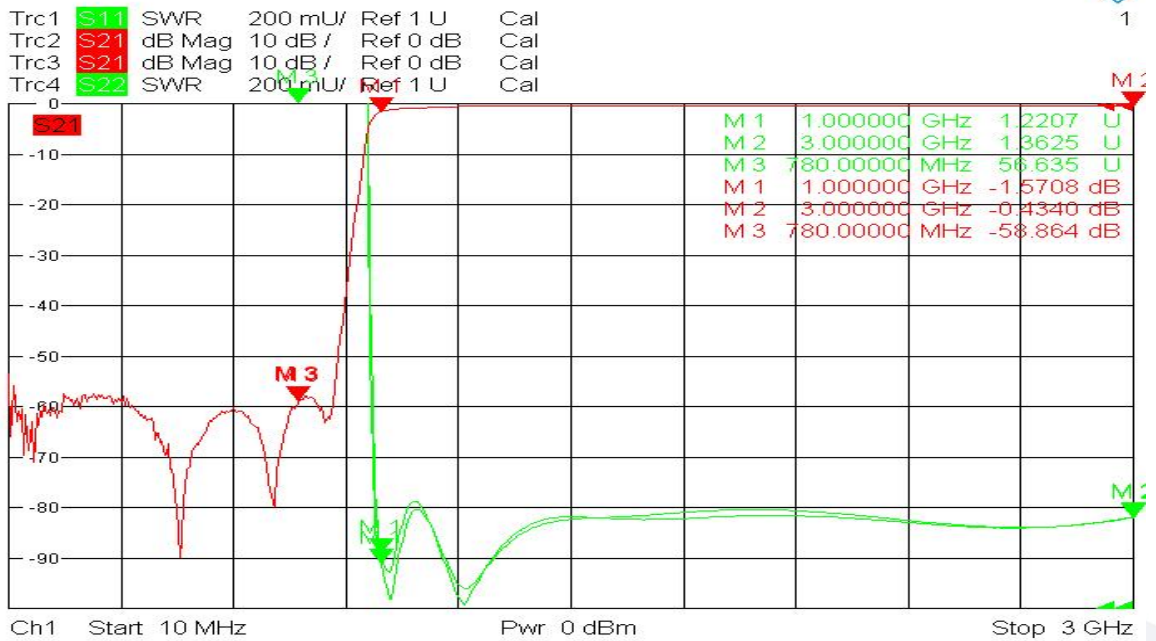

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.