

Coaxial Band-pass Filter

Center Frequency 70 MHz/SMA Female

Model: TLBF-70M-10M-L2

TLBF-70M-10M-L2 is a coaxial band-pass filter with a passband center frequency at 70 MHz and a rejection frequencies at $f_c \pm 10$ MHz. The maximum insertion loss of the filter is 2.8 dB and the minimum rejection is 50 dB.

Features:

- Passband Center Frequency 70 MHz
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	65		75	MHz
Band Width			10	MHz
Passband Insertion Loss			2.8	dB
Pass Band Ripple			2.3	dB
VSWR			1.6	:1
Rejection@ $f_c \pm 10$ MHz	50			dB
Power Handling			2	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40.4	mm

Outline Drawing:

Unit:mm

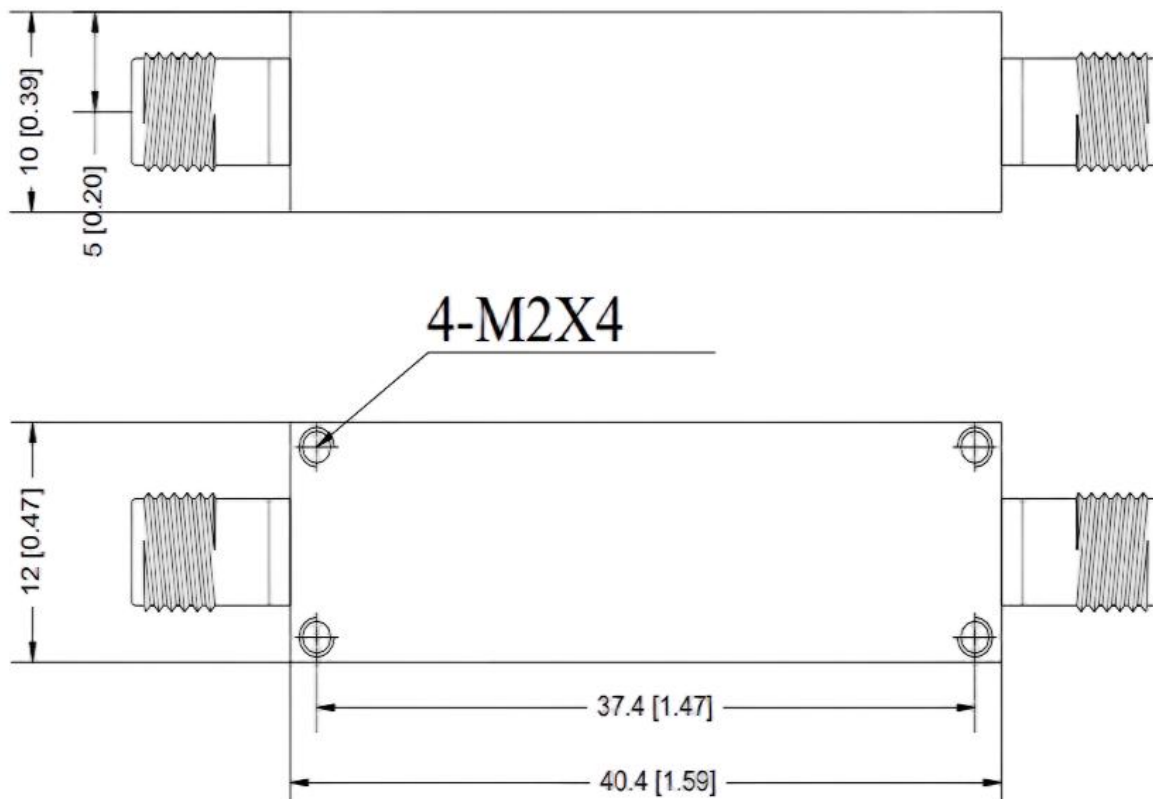


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-70M-10M-L2	Coaxial Band-pass Filter, Passband center frequency: 70MHz, Passband Insertion Loss: 2.8dB, SMA Female	Rev.1.0

Typical Performance Data:

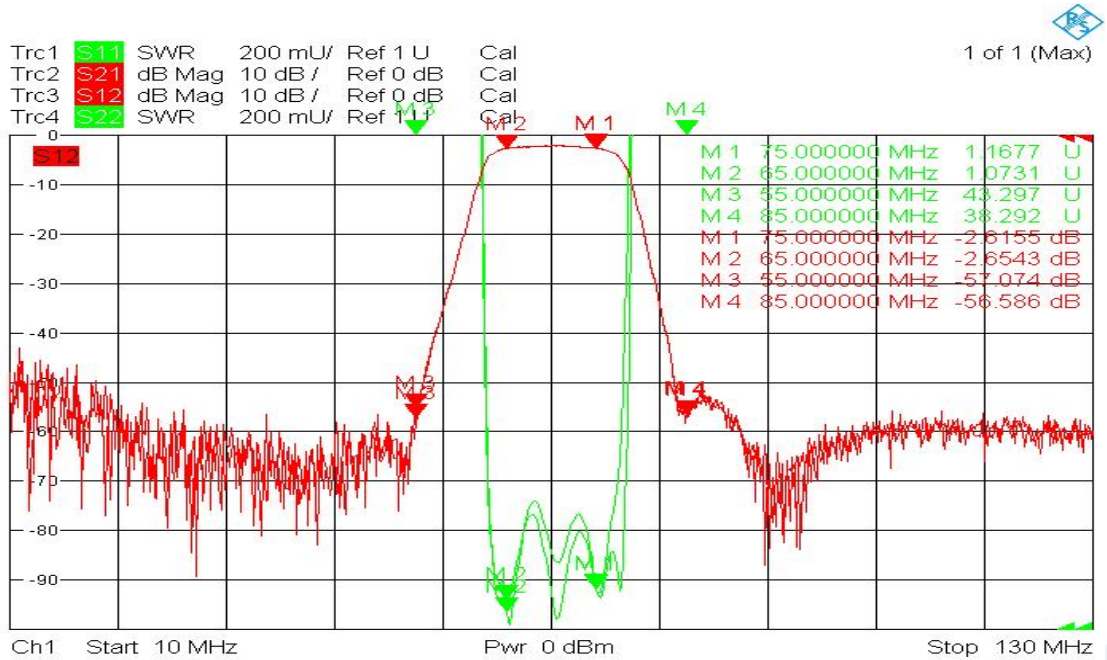

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.