

Coaxial Band-pass Filter

10-12 GHz/SMA Female

Model: TLBF-10G-12G-E

TLBF-10G-12G-E is a coaxial band-pass filter with a passband frequency from 10 to 12 GHz and a rejection frequencies from 7.5 GHz to 14.5 GHz. The maximum insertion loss of the filter is 1.0 dB and the typical rejection is 40 dB.

Features:

- Passband Frequency Range 10 to 12 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	10		12	GHz
Band Width			2	GHz
Passband Insertion Loss			1.0	dB
Pass Band Ripple			0.8	dB
Rejection	>40dB@fC±2.5GHz			dB
Power Handling			50	W
VSWR			1.8	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Weight	/	g

Outline Drawing:

Unit:mm

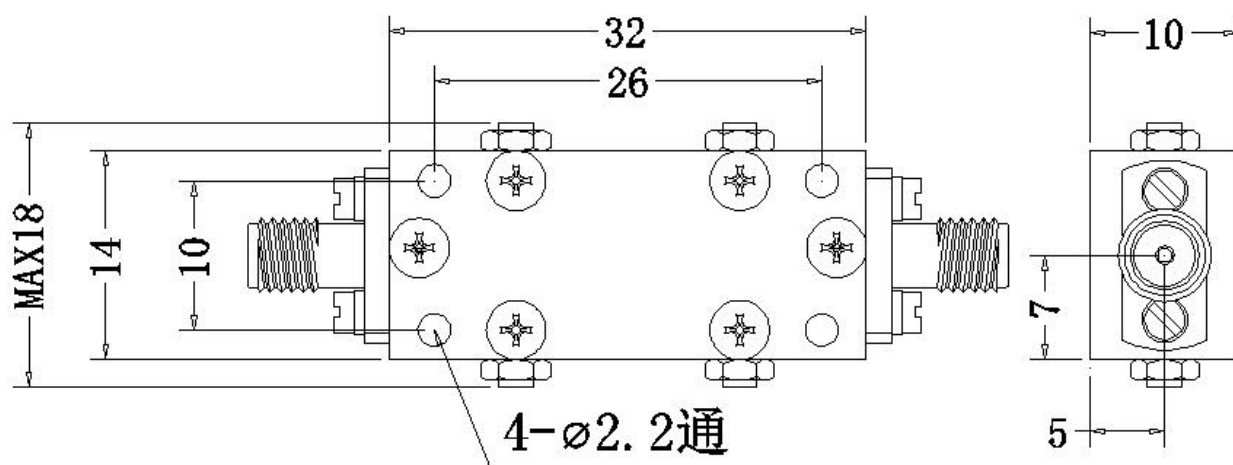


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-10G-12G-E	Coaxial Band-pass Filter, Passband frequency range:10-12GHz, Passband Insertion Loss:1.0dB, SMA Female	Rev.1.0

Typical Performance Data:

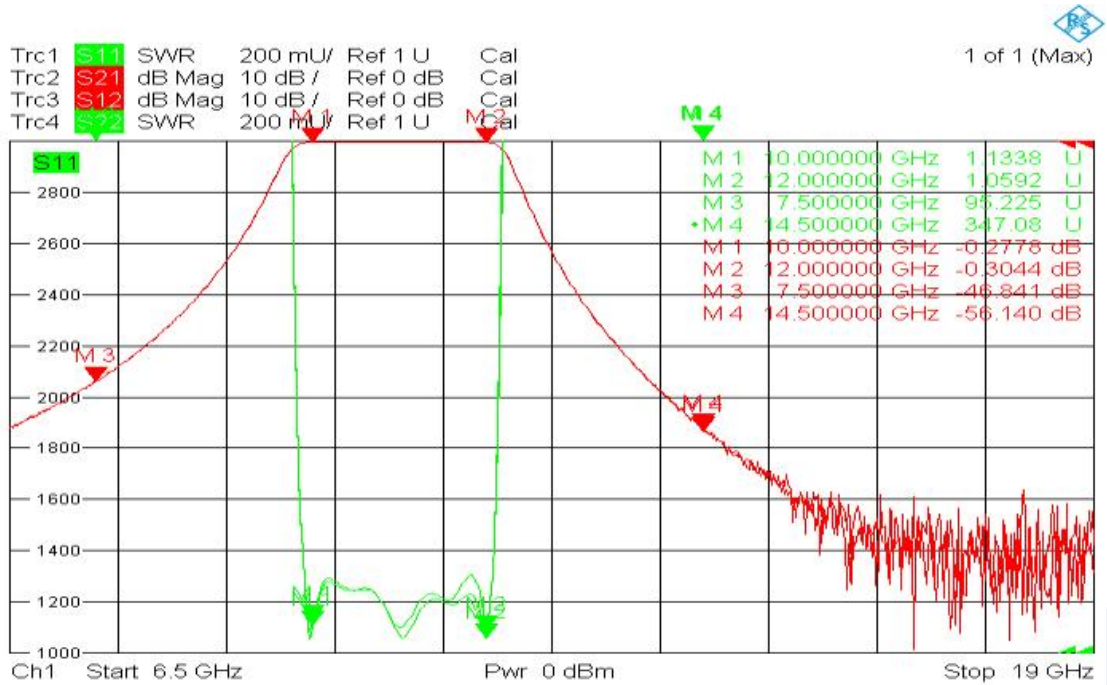

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.