

Coaxial Band-pass Filter

100-800 MHz/SMA Female

Model: TLBF-100M-800M-L

TLBF-100M-800M-L is a coaxial band-pass filter with a passband frequency from 100 to 800 MHz and a rejection frequencies from DC to 50 MHz point at 1000 MHz. The maximum insertion loss of the filter is 1.2 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 100 to 800 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	100		800	MHz
Band Width			700	MHz
Passband Insertion Loss			1.2	dB
Pass Band Ripple			1.0	dB
VSWR			1.5	:1
Rejection@DC-50MHz& 1000MHz	40			dB
Power Handling			5	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40.4	mm

Outline Drawing:

Unit:mm

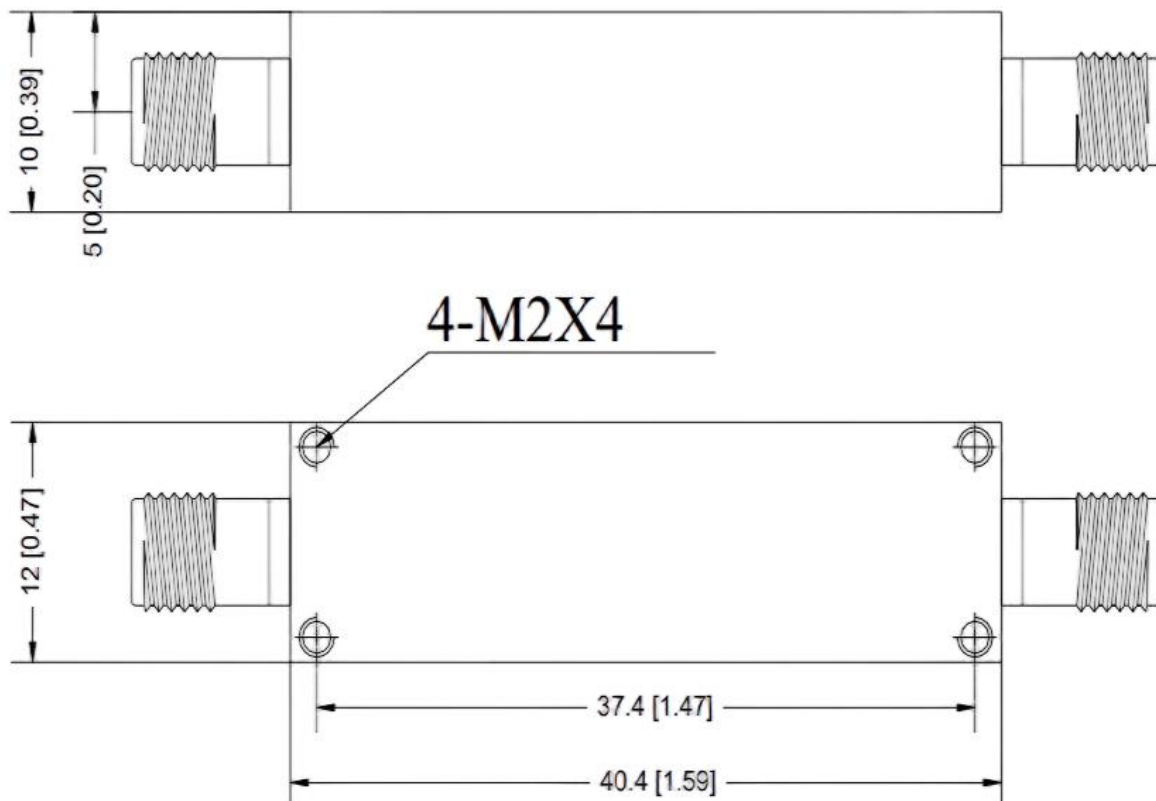

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-100M-800M-L	Coaxial Band-pass Filter, Passband frequency range:100-800MHz, Passband Insertion Loss:1.2dB, SMA Female	Rev.1.0