Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coaxial Band-pass Filter

2200-2400 MHz/SMA Female

Model: TLBF-2G3-200M-E

TLBF-2G3-200M-E is a coaxial band-pass filter with a passband frequency from 2200 to 2400 MHz and a rejection frequencies at fc±450 MHz. The maximum insertion loss of the filter is 1.8 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range 2200 to 2400 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	2200		2400	MHz
Band Width			200	MHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.0	dB
VSWR			1.6	:1
Rejection@fc±450MHz	50			dB
Power Handling			50	W
Impedance	50			Ohms


Envrionmental And Physical Characteristics:


Description	Parameter	Units
Operating Temerature	-40 To +70	℃
Connectors	SMA Female	
Size	12*24*52	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm

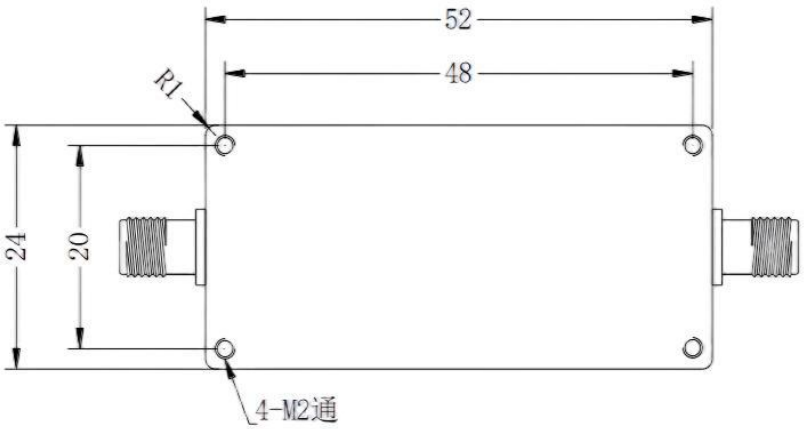

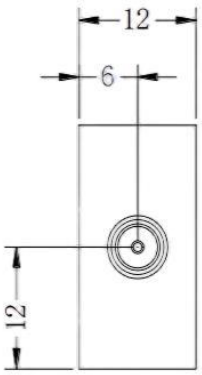




ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-2G3-200M-E	Coaxial Band-pass Filter,Passband frequency range:2200-2400MHz,Passband Insertion Loss:1.8dB, SMA Female	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

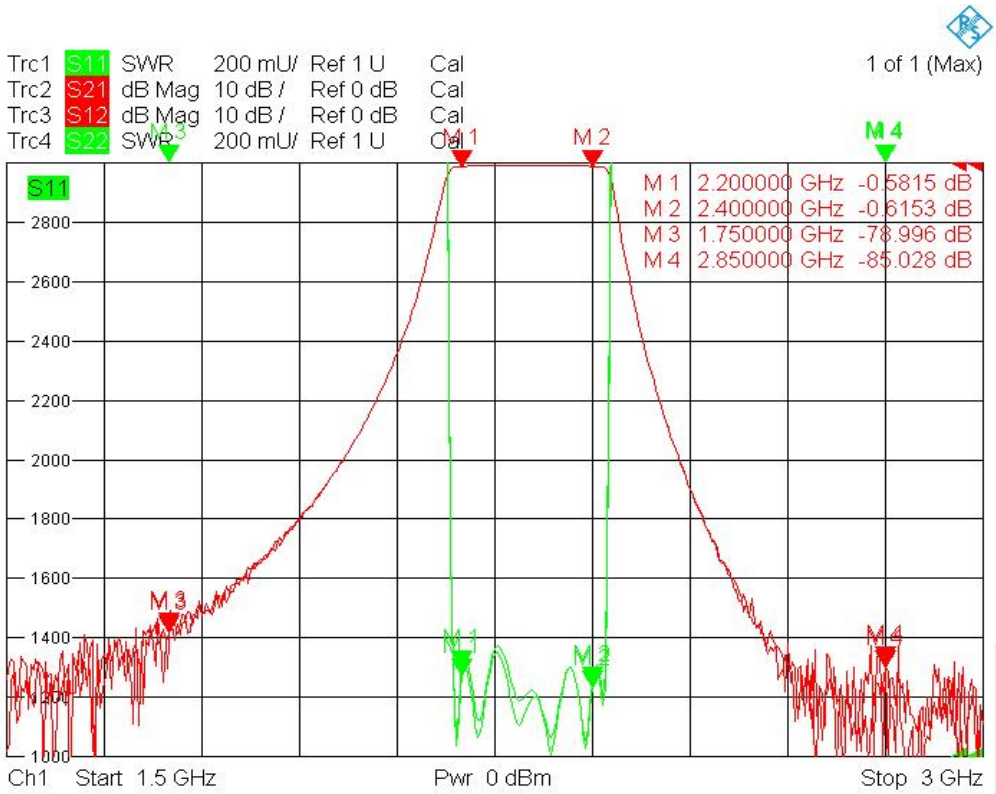

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.