

Coaxial Band-pass Filter

2150-2450 MHz/SMA Female

Model: TLBF-2G3-300M-E

TLBF-2G3-300M-E is a coaxial band-pass filter with a passband frequency from 2150 to 2450 MHz and a rejection frequencies at $f_c \pm 450$ MHz. The maximum insertion loss of the filter is 1.8 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 2150 to 2450 MHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	2150		2450	MHz
Band Width			300	MHz
Passband Insertion Loss			1.8	dB
Pass Band Ripple			1.0	dB
VSWR			1.6	:1
Rejection@ $f_c \pm 450$ MHz	50			dB
Power Handling			50	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	12*24*52	mm

Outline Drawing: Unit:mm

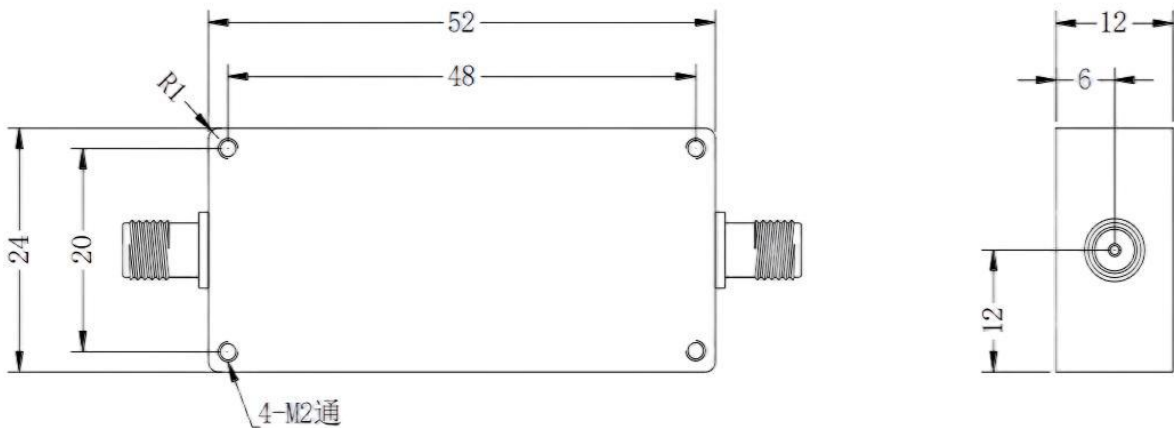

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:

Base Number	Description	Revision
TLBF-2G3-300M-E	Coaxial Band-pass Filter, Passband frequency range: 2150-2450MHz, Passband Insertion Loss: 1.8dB, SMA Female	Rev.1.0

Typical Performance Data:

Trc1 **S11** SWR 200 mU/ Ref 1 U Cal
Trc2 **S21** dB Mag 10 dB / Ref 0 dB Cal
Trc3 **S12** dB Mag 10 dB / Ref 0 dB Cal
Trc4 **S22** SWR 200 mU/ Ref 1 U Cal


1 of 1 (Max)

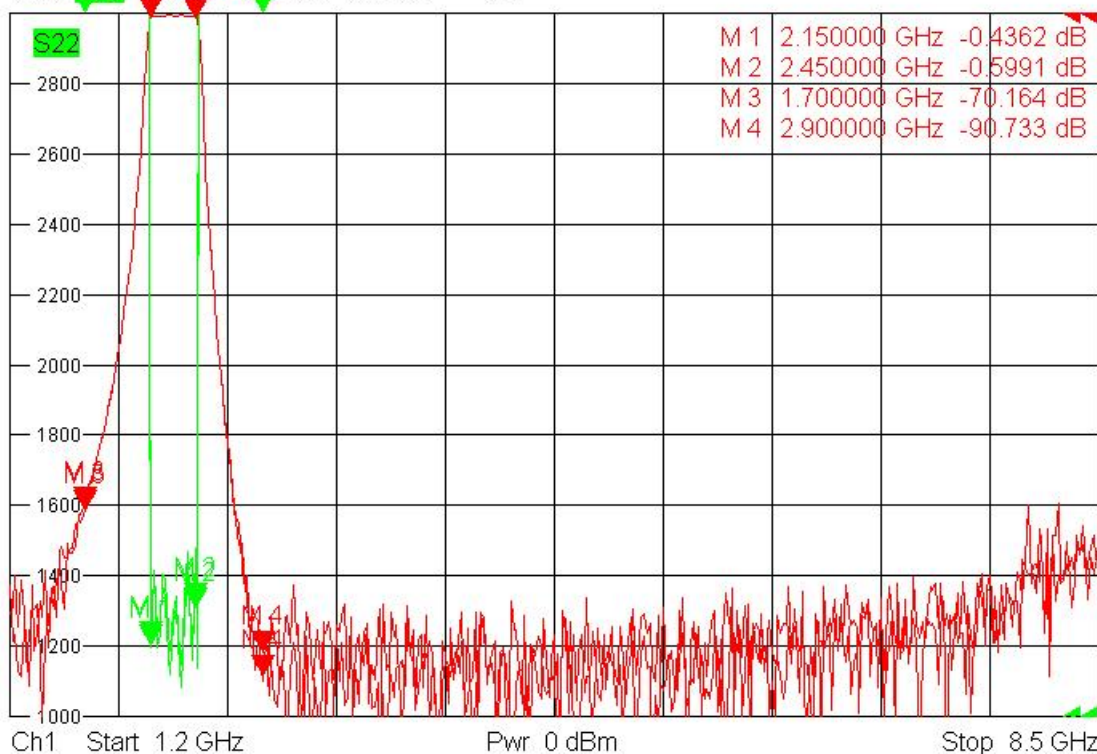

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.