

Coaxial Low-pass Filter

DC-200 MHz/SMA Female

Model: TLLF-DC-200M-L3

TLLF-DC-200M-L3 is a coaxial low-pass filter with a passband frequency from DC to 200 MHz and a rejection frequency from 250MHz to 800 MHz. The maximum insertion loss of the filter is 1.5 dB and the minimum rejection is 50 dB.

Features:

- Passband Frequency Range DC to 200MHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	DC		200	MHz
Passband Insertion Loss			1.5	dB
Pass band Ripple			1.3	dB
Rejection	>50dB@250-800MHz			
Power Handling			2	W
VSWR			1.5	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	40*12*10	mm

Outline Drawing:

Unit:mm

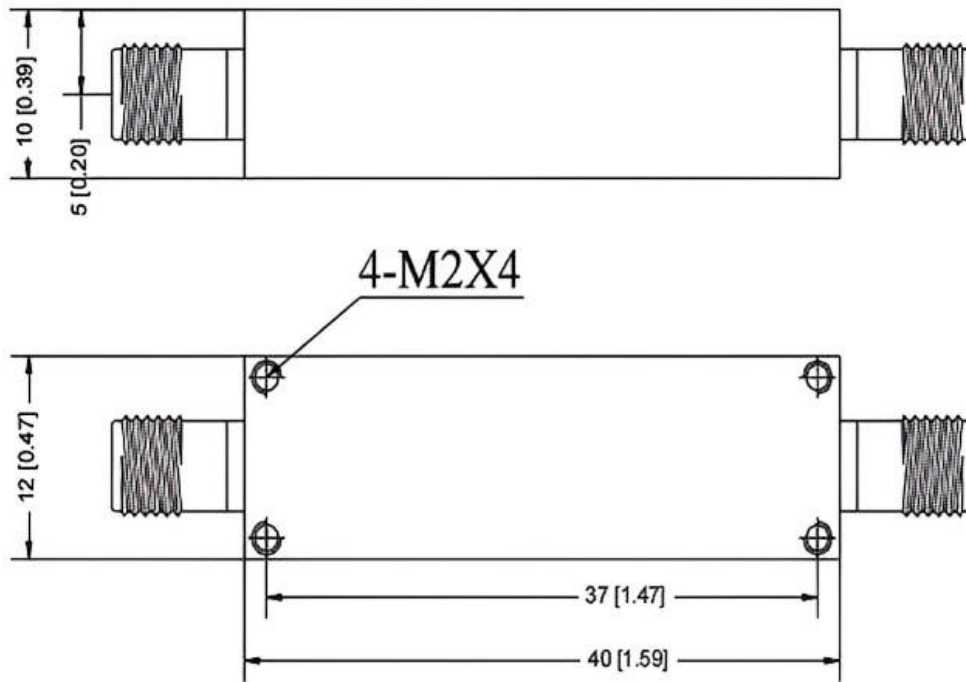

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLF-DC-200M-L3	Coaxial Low-pass Filter, Passband frequency range: DC-200MHz, Passband Insertion Loss: 1.5dB, SMA Female	Rev.1.0

Typical Performance Data:

Trc1 **S11** SWR 200 mU/ Ref 1 U Cal
Trc2 **S21** dB Mag 10 dB / Ref 0 dB Cal
Trc3 **S12** dB Mag 10 dB / Ref 0 dB Cal
Trc4 **S22** SWR 200 mU/ Ref 1 U Cal

1 of 1 (Max)

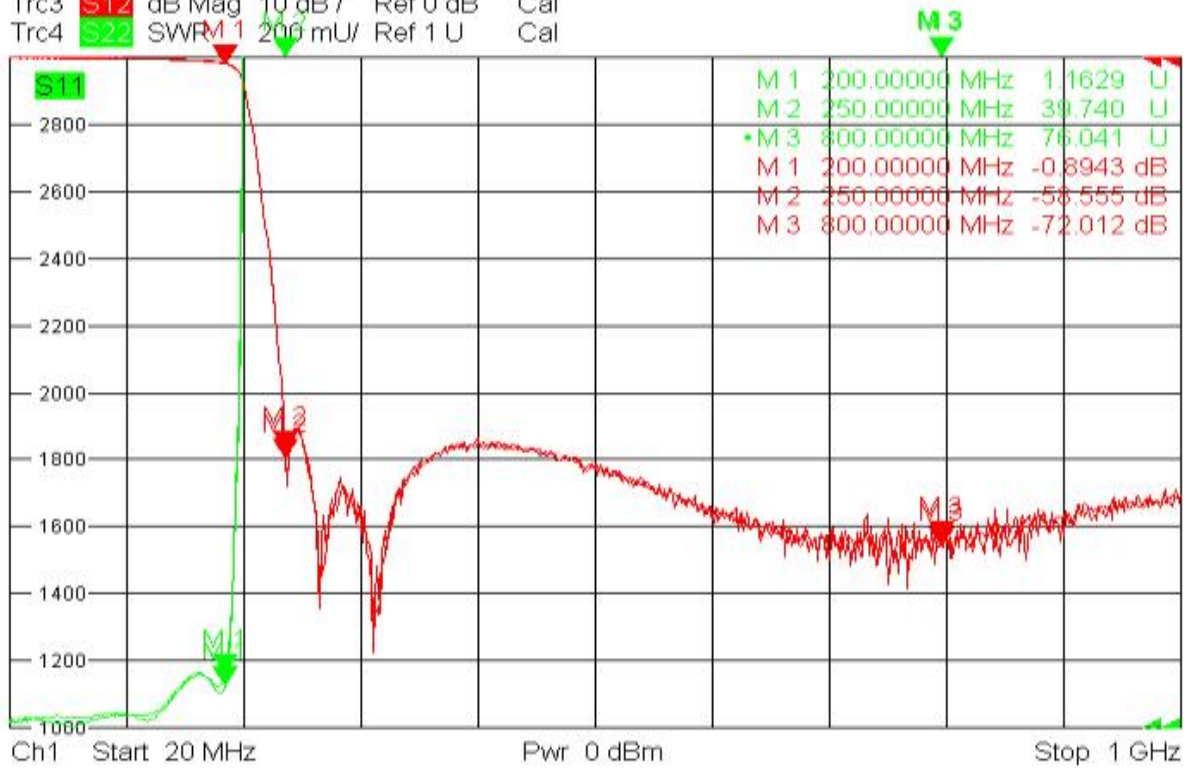

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.