

Subharmonic Mixer

RF:75-110GHz/LO:9.375-13.75GHz/IF:DC-1.8GHz

Model: TLHM-75110-08-10

TLHM-75110-08-10 is a subharmonic mixer. The mixer supports the full waveguide band operation for LO frequency from 9.375 to 13.75 GHz and RF frequency from 75 to 110 GHz with an extremely broad IF output from DC to 1.8 GHz. The mixer offers a conversion loss of 20 dB typical and LO input power of 15 dBm typical.

Features:

- Low LO Power Requirement
- Subharmonic mixer
- Compact Package

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
RF Frequency	75		110	GHz
LO Frequency	9.375		13.75	GHz
IF Frequency	DC		1.8	GHz
Multiply Factor		8		
LO-Input power		15		dBm
Conversion Loss	17	20	30	dB

Mechanical Specifications:

Parameter	Value	Units
RF Connector	WR-10/UG-387/U	
LO Connector	SMA Female	
IF Connector	SMA Female	
Size	TBD	mm

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	0 dBm
LO Input Power	TBD
IF Input Power	TBD
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	°C
Non-operating Temperature	-45		+85	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TLHM-75110-08-10	Subharmonic Mixer RF:75-110GHz,LO:9.375-13.75GHz,IF:DC-1.8GHz	Rev.1.0

Typical Performance Data:

Conversion Loss vs RF Frequency

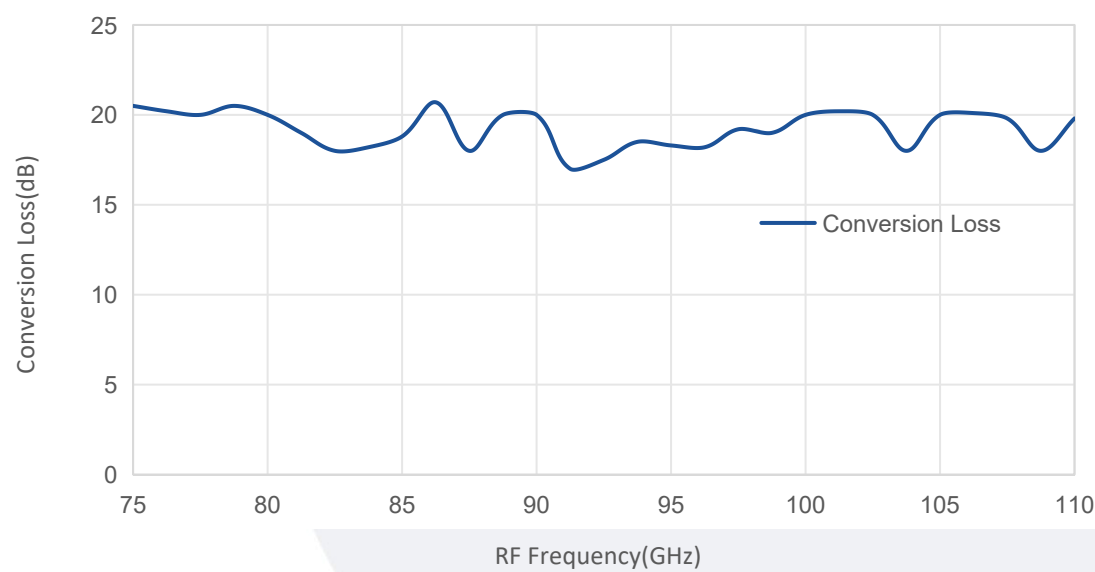

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.