

G Series: Semi-Rigid RF Coaxial Cable

Building upon the UF Series design, this cable incorporates enhanced dielectric materials to achieve lower attenuation and improved temperature-phase stability, making it ideal for applications demanding ultra-low signal loss and precise phase performance under varying temperatures.

Abrasion-Resistant TPU, IP68-rated for dust/water resistance, Resists oils, UV radiation, and extreme temperatures (-55°C to +85°C). Flame-retardant (UL94 V-0) and hydrolysis-resistant.

Typical Applications

- High-Frequency Test & Measurement
- Medical & Life Sciences
- Aerospace & Defense
- 5G/6G & IoT


Product Features

- Operating frequency up to 40GHz
- Unmatched Flexibility
- Ultra-Low Signal Loss
- Temperature-Phase Stability
- Environmental Robustness



G Series Semi-Rigid RF Coaxial Cable

07

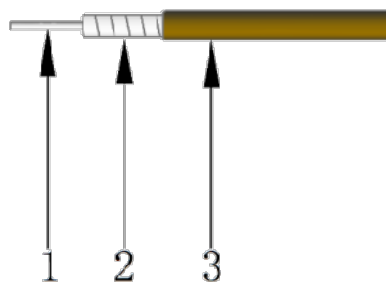

- 1- Center Conductor——SCCS/SPC
- 2- Dielectric——PTFE
- 3- Outer Conductor — — SPC/Ternary alloy



► Cable Specification

Model	G020		G034		G1		G2		G3		G4	
Mechanical Specifications												
Center Conductor	0.13		0.20		0.29		0.51		0.92		1.63	
Dielectric	0.43		0.66		0.94		1.68		2.98		5.31	
Outer Conductor	0.58		0.86		1.19		2.20		3.58		6.35	
Electrical Specifications												
Impedance(Ω)	50		50		50		50		50		50	
Velocity of Propagation(%)	70		70		70		70		70		70	
Shielding Effectiveness(dB)	< -110 (0-1GHz)		< -110 (0-1GHz)		< -165		< -165		< -165		< -165	
Time Delay (ns/m)	4.76		4.76		4.76		4.76		4.76		4.76	
Capacitance (pF/m)	95		98		96.5		95.2		96.5		96.1	
Cut-off Frequency(GHz)	237		154		108		61		34		19	
Voltage Withstand(V,DC)	220 (1 min)		330 (1 min)		450		850		1500		2600	
Static Bending Radius (mm)	1.3		5		6		15		18		32	
Operating Temperature (°C)	-55~125		-55~125		-55~200		-55~200		-55~200		-55~200	
Attenuation(+25°C Ambient)&Power Handling(+40°C Ambient;SeaLevel;VSWR 1:1)												
Frequency (MHz)	dB/100 m	KW	dB/100 m	KW	dB/100 m	KW	dB/100 m	KW	dB/100 m	KW	dB/100 m	KW
500	173.06	0.017	119.68	0.031	83.94	0.054	48.19	0.144	26.17	0.390	17.37	1.743
1000	245.20	0.012	169.25	0.022	119.76	0.038	69.30	0.100	38.17	0.267	25.72	1.177
2000	347.67	0.009	239.38	0.015	171.47	0.026	100.31	0.069	56.28	0.181	38.69	0.783
4000	493.49	0.006	338.57	0.011	246.68	0.018	146.47	0.047	84.20	0.121	59.32	0.510
6000	606.10	0.005	414.69	0.009	306.07	0.015	183.73	0.038	107.46	0.095	76.99	0.393
8000	701.52	0.004	478.87	0.008	357.25	0.011	216.37	0.032	128.31	0.080	93.12	0.325
12000	862.58	0.003	586.56	0.006	445.42	0.010	273.66	0.025	165.81	0.062	122.72	0.247
16000	999.33	0.003	677.37	0.005	522.00	0.009	324.44	0.021	199.91	0.051	150.14	0.202
18000	1061.54	0.003	718.49	0.005	557.35	0.008	348.17	0.020	216.09	0.047	163.30	0.185
20000	1120.55	0.003	757.38	0.005	591.17	0.008	371.05	0.019	231.81	0.044		
26500	1295.22	0.002	871.91	0.004	692.94	0.007	440.80	0.016	280.53	0.036		
40000	1602.78	0.002	1071.44	0.003	877.98	0.005	570.87	0.012				
50000	1800.12	0.002	1198.06	0.003	1000.51	0.005						
K1	7.7051381		5.351381		3.6740161		2.0669291		1.0824		0.688976	
K2	0.0015439		0.000029		0.0035795		0.003937		0.003937		0.003937	

G Series Semi-Rigid RF Coaxial Cable

07

► Test Data

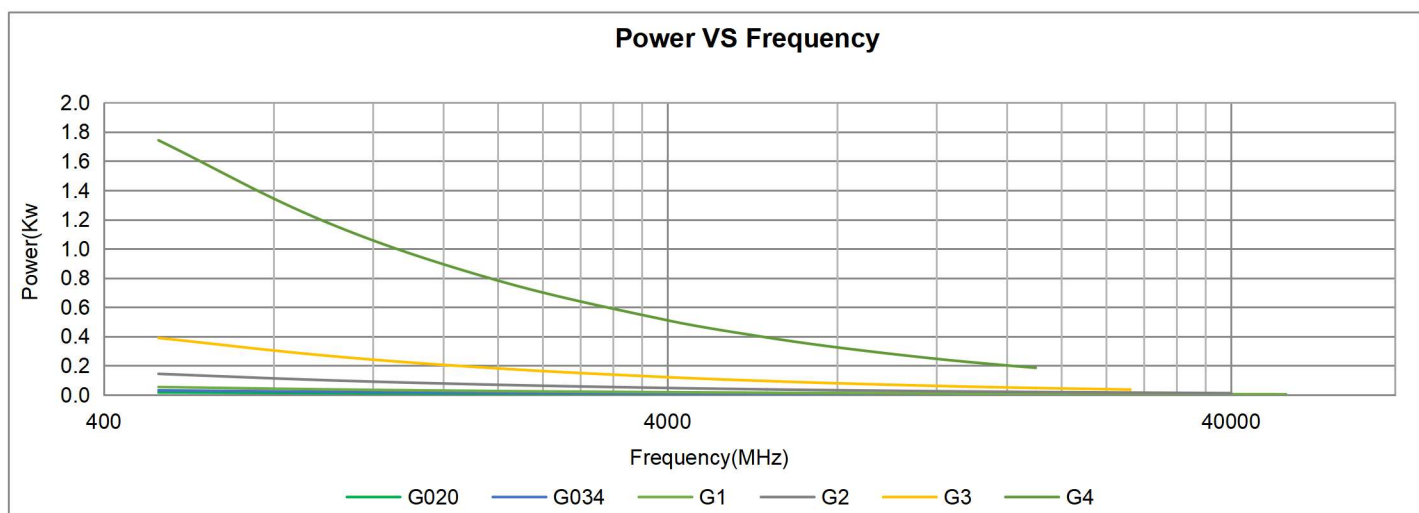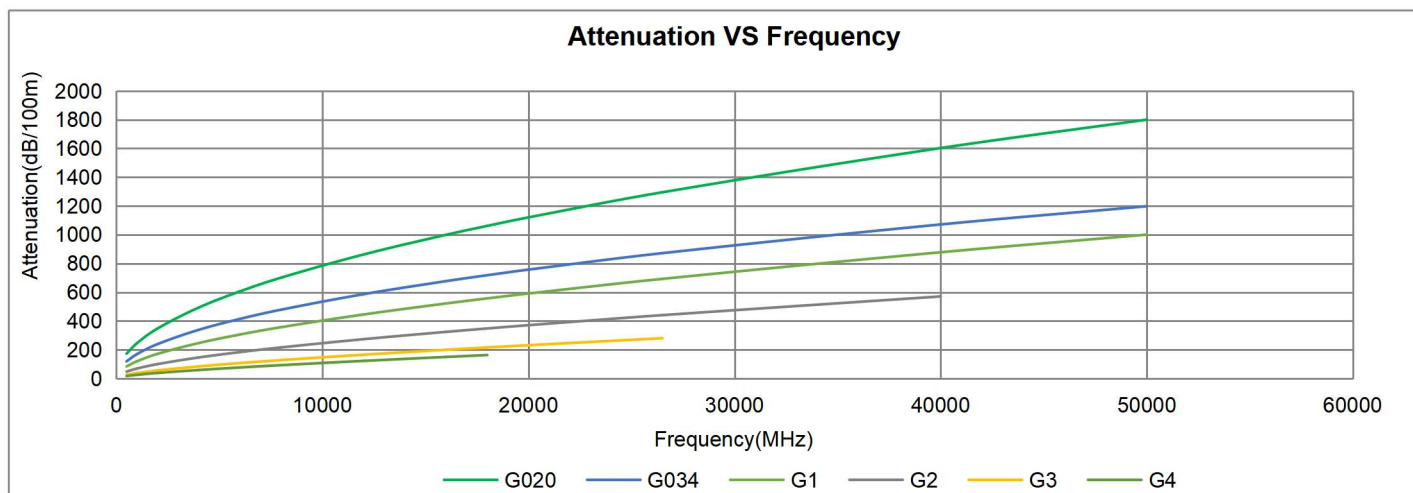

07

The diagram shows a cable assembly with the following components and their coding labels:

- G**: Cable Type (indicated by a bracket on the left)
- Two-port connector**: A bracket labeled "Two-port connector" and "Type" points to a connector in the middle.
- Length**: A bracket labeled "Length" points to a segment of the cable.
- Unit of length**: A bracket labeled "Unit of length" points to a segment of the cable.
- Phase matching and delay**: A bracket labeled "Phase matching and delay" points to a segment of the cable.

Below the diagram, the following text is present:

The coding is shown in the table below

XXPS: ≤ XXps
XX°: ≤ ±XX°

M: Meter
IN: Inch

Connector Code	Connector Type	Operating Frequency	G020	G034	G1	G2	G3	G4	VSWR (Max)
1.0M	1.0mm Male	DC-110GHz			●				1.50
1.0F	1.0mm Female	DC-110GHz			●				1.50
1.85M	1.85mm Male	DC-67GHz			●	●			1.30
1.85F	1.85mm Female	DC-67GHz			●	●			1.30
2.4M	2.4mm Male	DC-50GHz	●	●	●	●			1.30
2.92M	2.92mm Male	DC-40GHz	●	●	●	●			1.30
2.92F	2.92mm Female	DC-40GHz	●	●	●	●			1.30
SSMAM	SSMA Male	DC-40GHz	●	●		●			1.30
3.5M	3.5mm Male	DC-27GHz	●	●		●	●		1.30
SMAM	SMA Male	DC-27GHz	●	●		●	●	●	1.25
SMAF	SMA Female	DC-27GHz	●	●		●	●	●	1.25
NM	N Male	DC-18GHz	●	●		●	●	●	1.25
NF	N Female	DC-18GHz	●	●		●	●	●	1.25
TNCM	TNC Male	DC-12GHz	●	●		●		●	1.25
SMPF	SMP Female	DC-40GHz	●	●		●			1.25
SSMPF	SSMP Female	DC-40GHz	●	●		●			1.25