泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

V-band Spectrum Frequency Extension Systems

50-75GHz/WR-15 Model: TLSM-050075-06-15

TLSM-050075-06-15 spectrum frequency extension systems are a dedicated Test & Measurement solution for extending the range of your signal source to 50-75 GHz.

Features:

- Frequency range: 50-75 GHz
- Conversion Loss SSB: 10dB Typ
- Low conversion loss

Applications:

- Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50		75	GHz
IF Output Frequency	DC		5	GHz
LO Input Frequency	8.33		12.5	GHz
LO Input Power	13	15	20	dBm
Multiplication Factor		6		
RF Input Power		-10	0	dBm
Mixer Conversion Loss SSB		10	12	dB

Mechanical Specifications:

Parameter	Value	Units
RF Input Ports	WR-15/UG-385/U	
LO/IF Ports	SMA Female	
LO Input Ports	SMA Female	
IF Output Ports	SMA Female	
DHP Ports	SMA Female	
DLP Ports	SMA Female	
Power Supply Pin	FGG 0B 4 Core	
Size	155.2*75.2*52	mm


Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Absolute Maximum Ratings :


Parameter	Value
Supply Bias Voltage	+240 V AC
RF Input Power	0 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

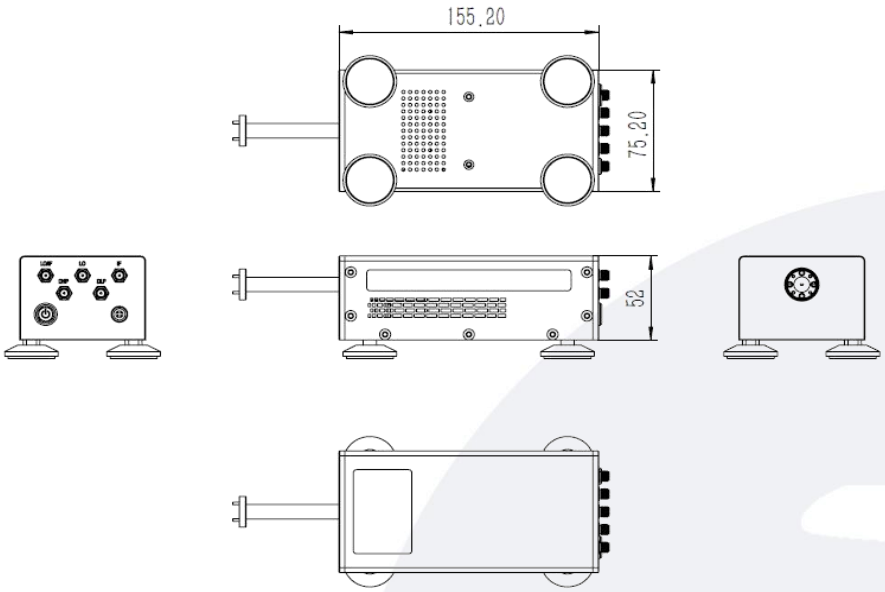

Block Diagrams:

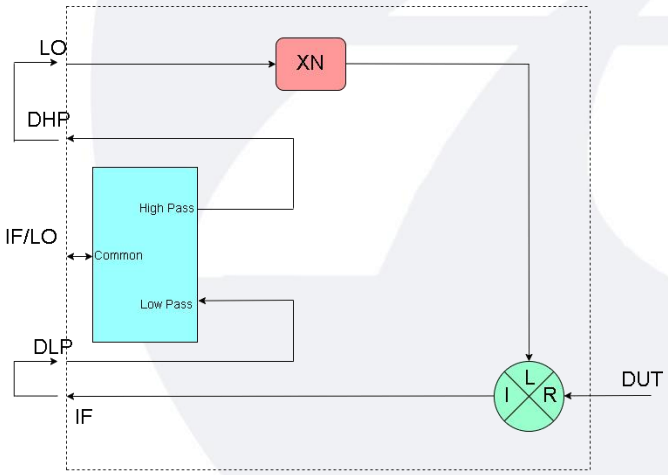

泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Envrionmental And Physical Characteristics:

Parameter	Min	Typ	Max	Units
Operating Temperature	-10		+65	℃
Non-operating Temperature	-45		+85	℃
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


Ordering Information:

Part Number	Description	Revision
TLSM-050075-06-15	V-Band Spectrum Frequency Extension Systems X6,50-75GHz, Conversion Loss SSB: 10dB typ.	Rev.1.2

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS

Typical Performance Data:

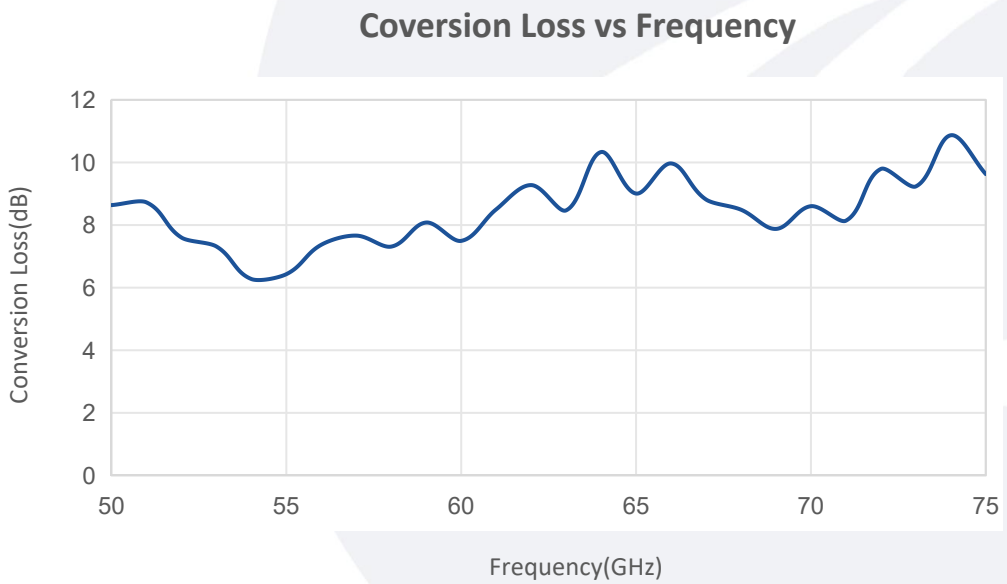

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.