Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Coax Directional Coupler

6-26.5GHz/10dB Coupling/SMA Female

Model: TC-60265-10S

TC-60265-10S is a coaxial directional coupler that delivers a 10 dB nominal coupling level and 12 dB minimum directivity across the full frequency range from 6 to 26.5 GHz. It is a three-port passive device that can couple a portion of the power from the main transmission line to the auxiliary line in a directional manner.

Features:

- Output Frequency: 6-26.5GHz
- Coupling: 10dB Typ
- Stackable mechanical design
- Low Insertion Loss
- Moderate Directivity
- 50 Ohm Matched Input / Output

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	6		26.5	GHz
Insertion Loss (Excl Coupling)			1.0	dB
Coupling		10±1		dB
Directivity	12			dB
Power Handling			30	W
VSWR			1.4	:1
Impedance		50		Ohms


Mechanical Specifications:

Parameter	Value	Units
Input/Output Connector	SMA Female/SMA Female	
Size	28*15*11	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

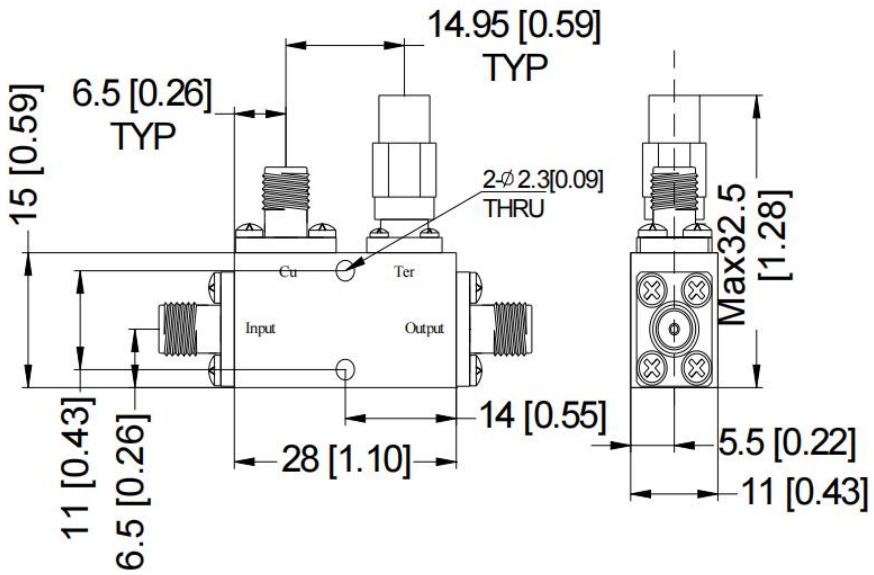

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Temperature Range	-45		+85	℃
Relative humidity	100% RH at 35c, 95%RH at 40℃			%
Altitude	50,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:

Base Number	Description	Revision
TC-60265-10S	Coaxial Directional Coupler 6-26.5GHz, Coulping:10dB,SMA Female	Rev.1.0

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Typical Performance Data:

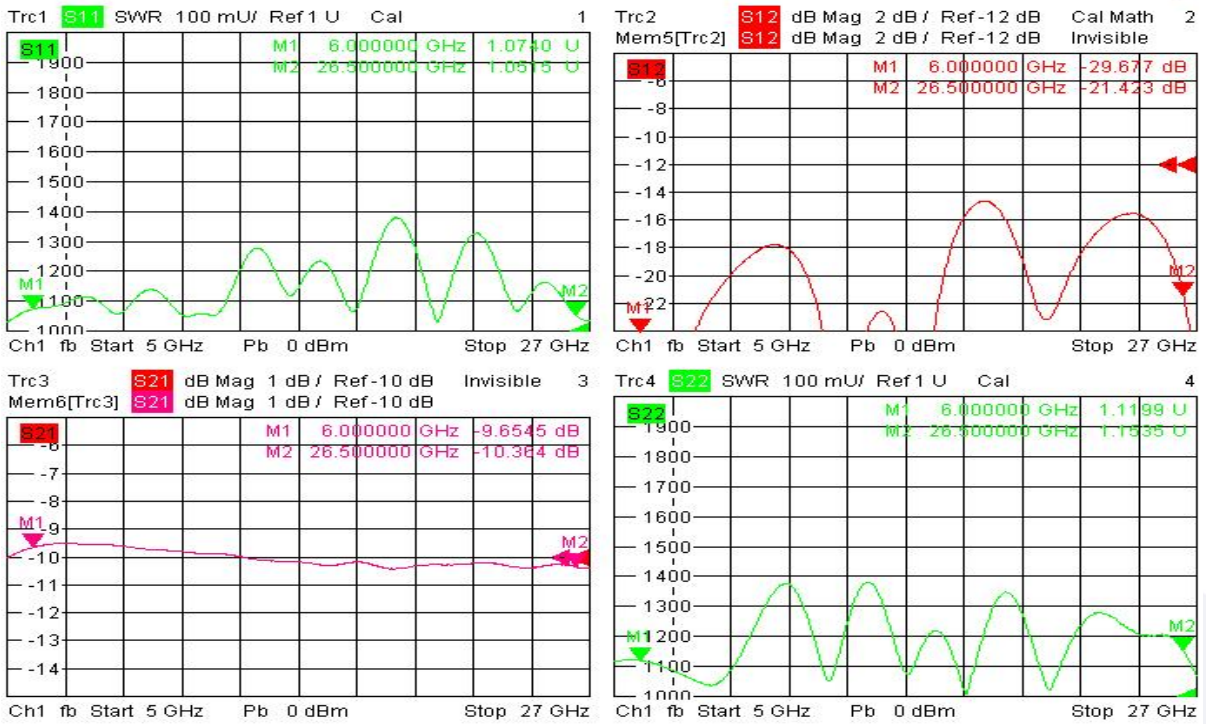

12/26/2019, 12:14 PM



12/26/2019, 12:33 PM

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.