

Coaxial Band-pass Filter

1-1.4 GHz/SMA Female

Model: TLBF-1G-1G4-L

TLBF-1G-1G4-L is a coaxial band-pass filter with a passband frequency from 1 to 1.4 GHz and a rejection frequencies from at $f_c \pm 300$ MHz. The maximum insertion loss of the filter is 1.6 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range 1 to 1.4 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
Passband Frequency range	1		1.4	GHz
Band Width			400	MHz
Insertion Loss(f_0)			1.6	dB
Pass Band Ripple			1.5	dB
VSWR			1.6	:1
Rejection@ $f_c \pm 300$ MHz	40			dB
Power Handling			2	W
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	10*12*40.4	mm

Outline Drawing:

Unit:mm

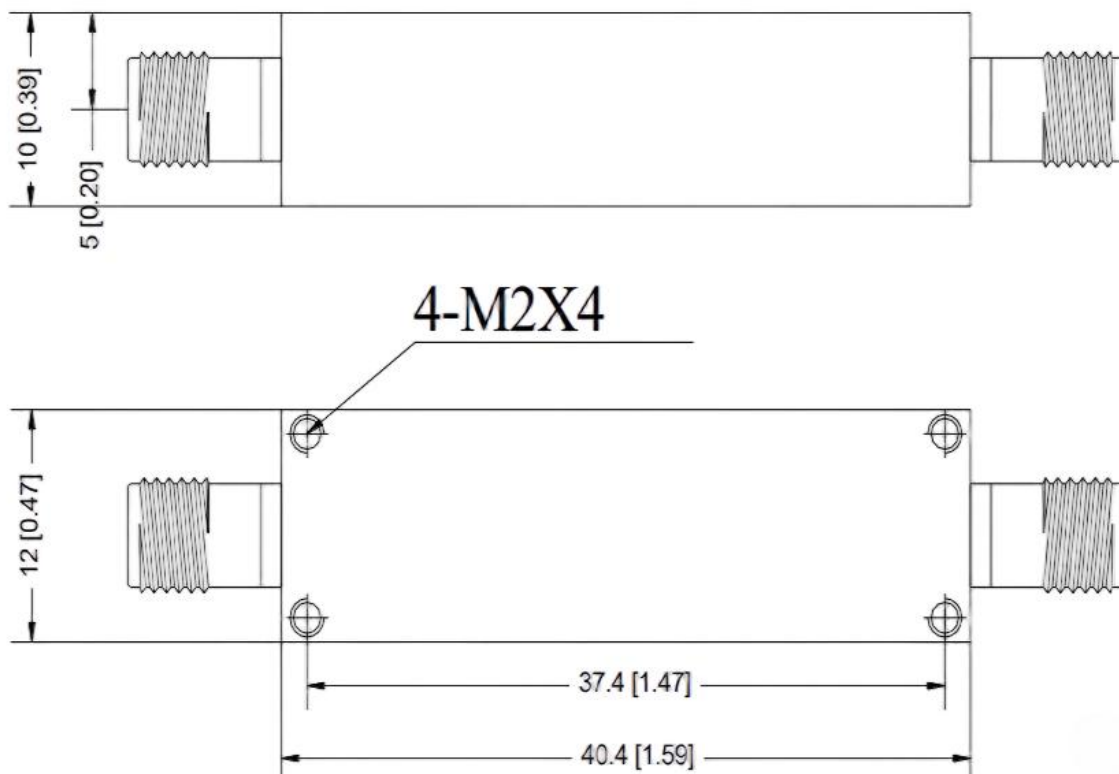


ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-1G-1G4-L	Coaxial Band-pass Filter, Passband frequency range: 1-1.4GHz, Insertion Loss(f0): 1.6dB, SMA Female	Rev.1.0

Typical Performance Data:

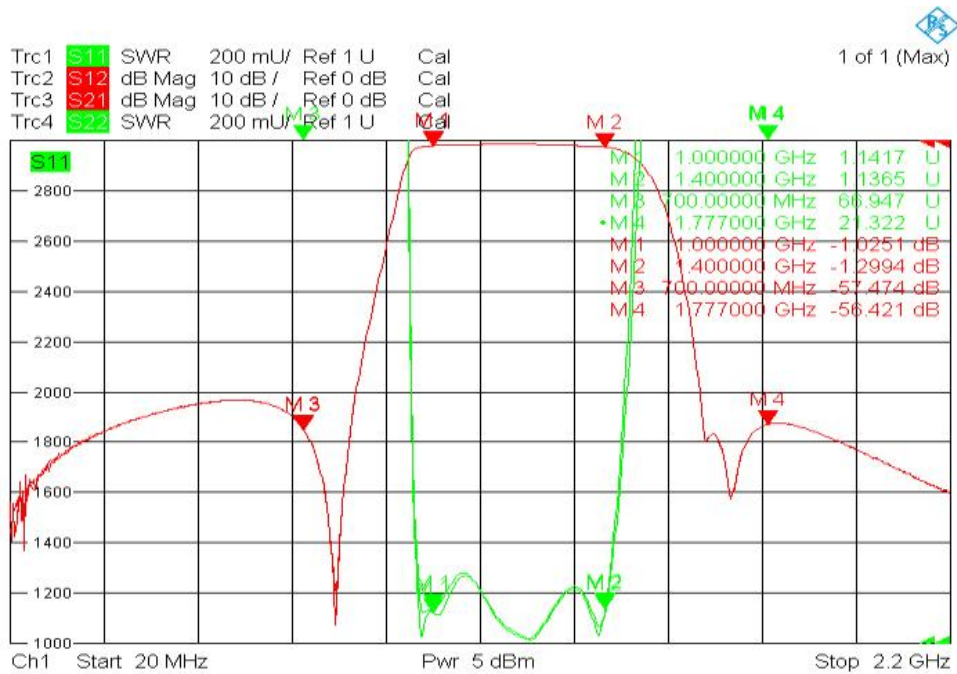

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.