

Low Noise Amplifier

50KHz-50GHz/8dB NF/23dB Gain/15dBm P1dB

Model: TLLA50K50G-23-50

TLLA50K50G-23-50 is a low noise amplifier with a typical small signal gain of 23 dB and a nominal noise figure of 8 dB across the frequency range of 50 KHz to 50 GHz. The DC power requirement for the amplifier is +12 V DC/280 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

Features:

- Output Frequency: 50KHz-50GHz
- Gain: 23dB Typ
- Noise Figure: 8dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	50KHz-50GHz			
Small Signal Gain		23		dB
Gain Flatness		±4.5		dB
Noise Figure		8		dB
Output P1dB		15		dBm
Input VSWR		2		:1
Output VSWR		2		:1
DC Voltage	+8	+12	+15	V DC
DC Supply Current		280		mA
Impedance	50			Ohms

Mechanical Specifications:

Parameter	Value	Units
Input /Output Connector	2.4mm Female/2.4mm Female	
DC Bias	Solder Pin	
Size	44.8*29.2*11	mm


Absolute Maximum Ratings:

Parameter	Value
Supply Bias Voltage	+15 V
RF Input Power	+15 dBm
ESD sensitivity (HBm)	Class 0, passed 150V



Outline Drawing:

Unit:mm

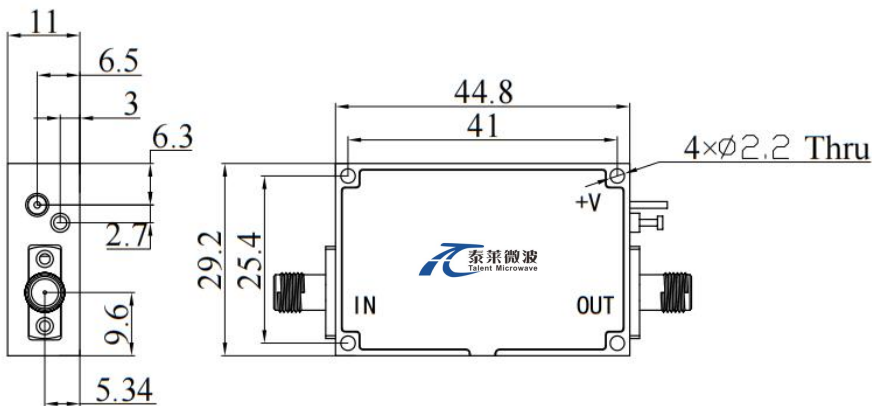

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Environmental Conditions:


Parameter	Min	Typ	Max	Units
Operating Temperature	-45		+85	°C
Non-operating Temperature	-55		+125	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

Ordering Information:


Base Number	Description	Revision
TLLA50K50G-23-50	Low Noise Amplifier, 50KHz-50GHz, Noise Figure:8dB, Gain: 23dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA50K50G-23-50-HS	Low Noise Amplifier, 50KHz-50GHz, Noise Figure:8dB, Gain: 23dB,P1dB:15dBm,+12V DC,With Heatsink	

Typical Performance Data:

Gain&VSWR vs Frequency

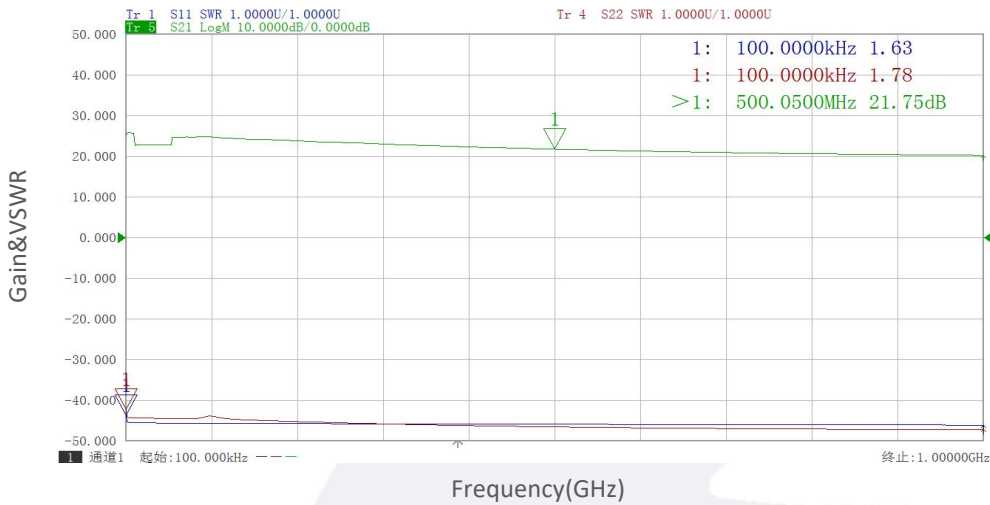


Gain&VSWR vs Frequency

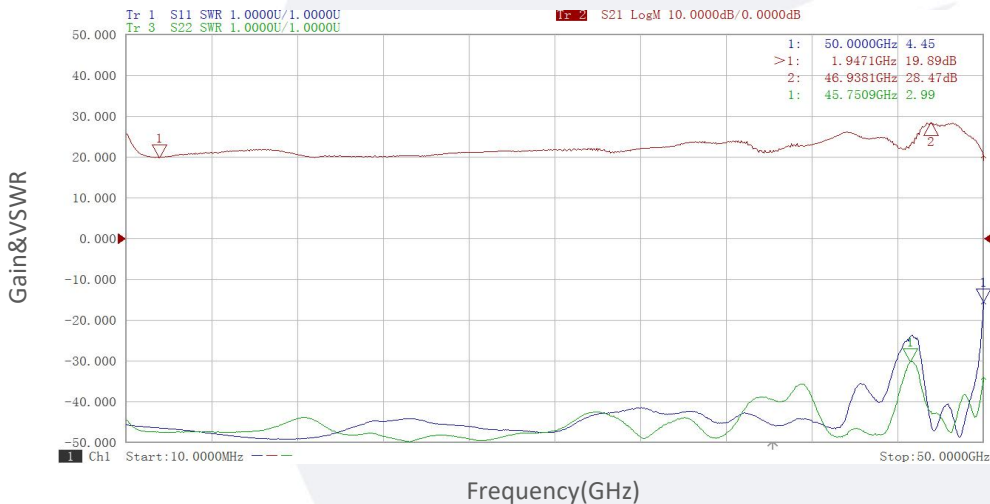

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:


Noise Figure vs Frequency

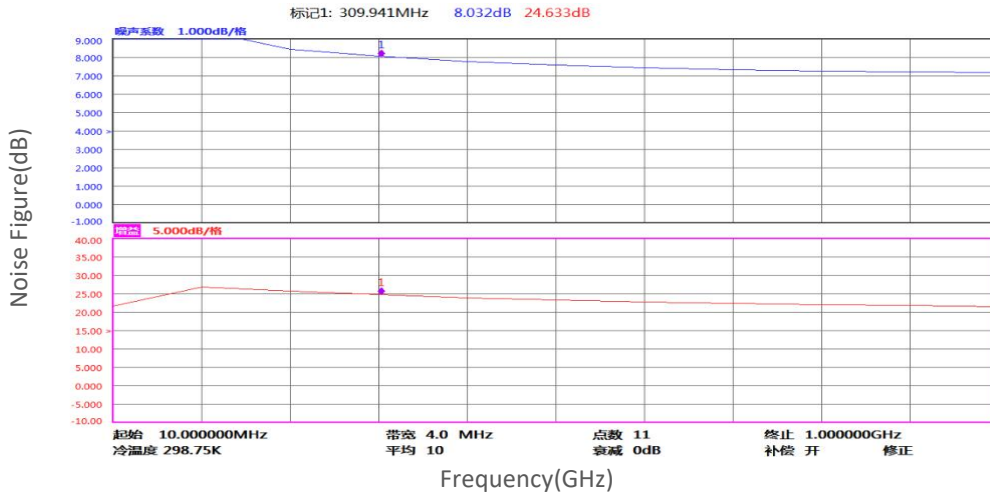

Noise Figure vs Frequency




Gain vs Output Power

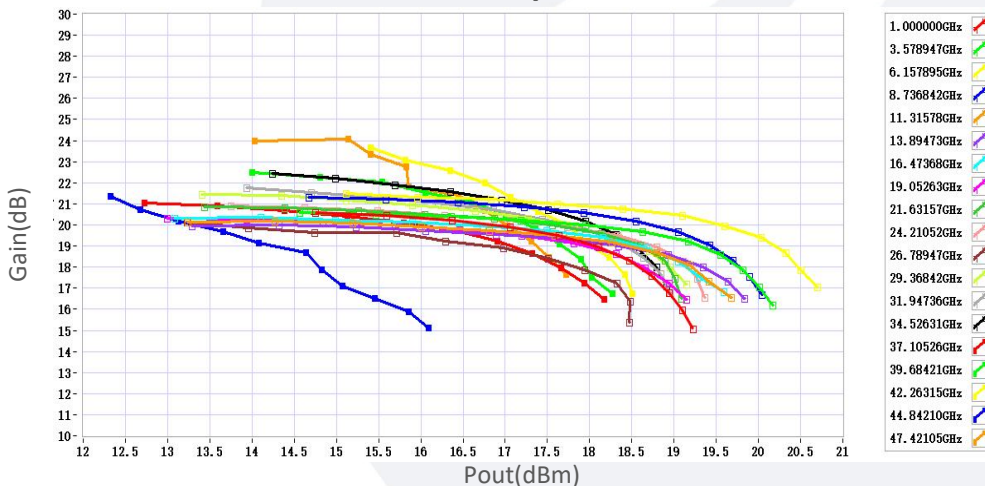


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

Typical Performance Data:

P1dB vs Frequency

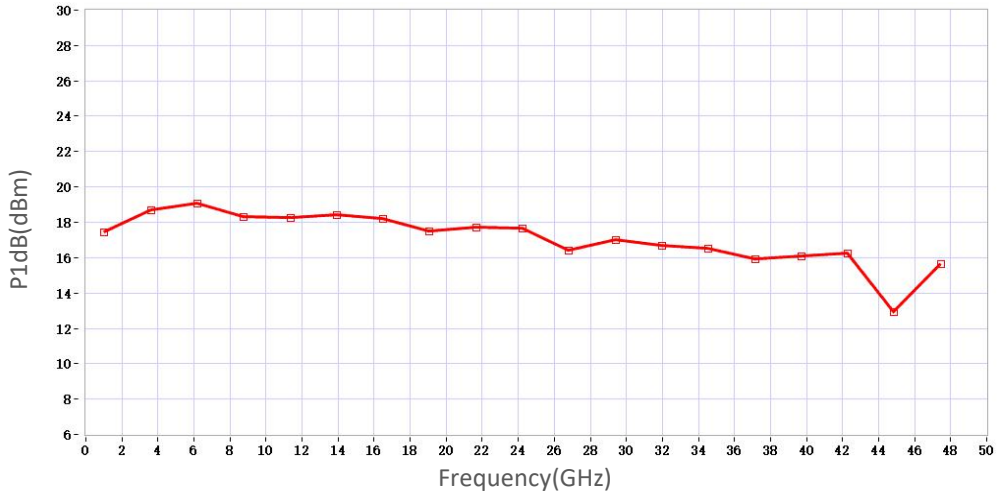

P3dB vs Frequency

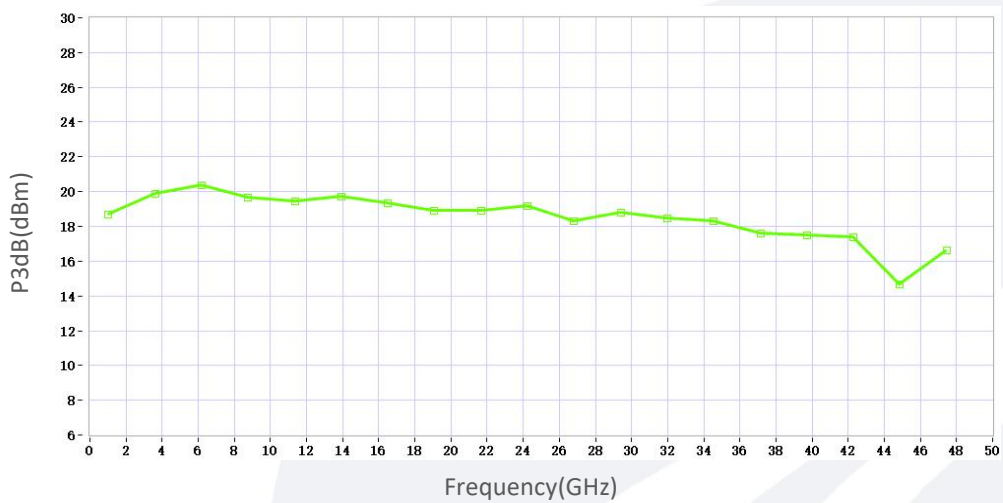

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.