

## Cryogenic Low Noise Amplifier

### 2-14GHz/5K Noise temperature/30dB Gain

**Model: TLLA2G14G-30-00-Cryo**

TLLA2G14G-30-00-Cryo is a cryogenic low noise amplifier with a typical small signal gain of 30 dB across the frequency range of 2 to 14 GHz. The drain voltage range requirement for the amplifier is 0.7 to 4V DC and gate voltage range is from -2 to +2V DC. The input and output port configuration offers coax adapter structure with 2.92mm female.

#### Features:

- Frequency range: 2-14GHz
- Gain: 30dB Typ
- Noise Temperature: 5K @Temperature≤4K
- Capable of operation at 4 K
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

#### Applications:

- Communication systems

#### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	2		14	GHz
Small Signal Gain		30		dB
Gain Flatness		±1.4		dB
Noise Temperature@TEM≤15K		6	7.1	K
Noise Temperature@TEM≤4K		5	6	K
Input Return Loss			-1.5	dB
Output Return Loss			-15	dB
Drain voltage range	0.7		4	V
Drain current range		20		mA
Gate voltage range	-2		+2	V
Power Consumption			36	mW
Impedance		50		Ohms

## Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	2.92mm Female/2.92mm Female	
DC Bias	Nano D 9-Pin	
Size	46*32.5*9	mm
Weight	65	g

## Absolute Maximum Ratings:

Parameter	Value
Drain voltage	+4 V
Gate voltage	±2 V
ESD sensitivity (HBm)	Class 0, passed 150V

## Outline Drawing:

Unit:mm( $\pm 0.1$ mm)

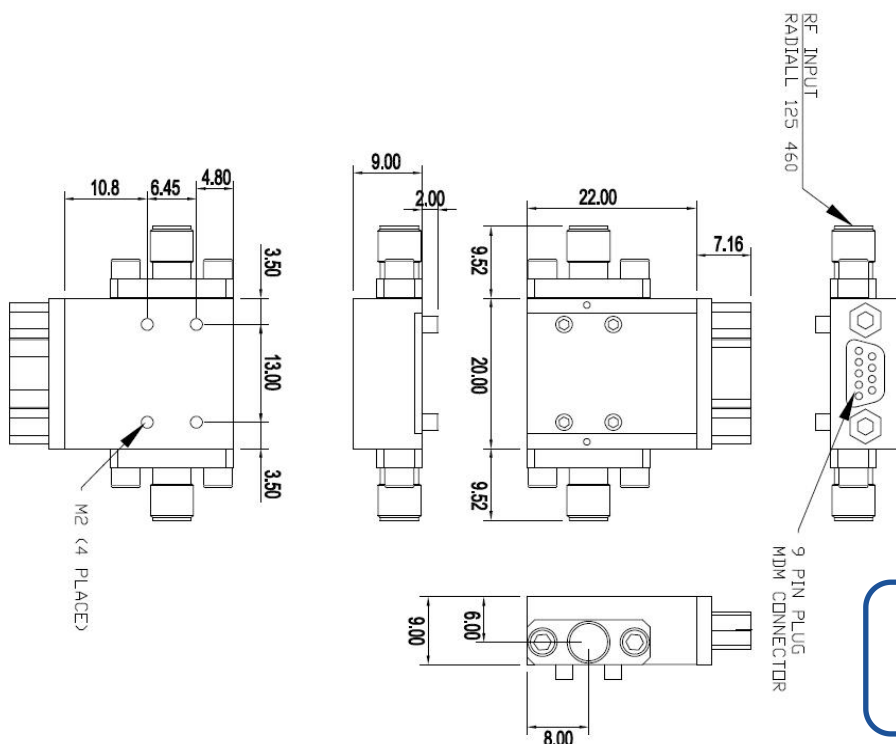

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

## Power Supply Conector:

Nano D 9Pin			
Pin#	Function	Pin#	Function
1	GND	5	VG2(-2~+2V)
2	VD1(+0.7~+4V)	6	VD3(+0.7~+4V)
3	VG1(-2~+2V)	7	VG3(-2~+2V)
4	VD2(+0.7~+4V)	8~9	NC

## Environmental Conditions:

Parameter	Min	Typ	Max	Units
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


## Ordering Information:

Base Number	Description	Revision
TLLA2G14G-30-00-Cryo	Cryogenic Low Noise Amplifier, 2-14GHz, Noise temperature: 5K, Gain: 30dB	Rev.1.0

**Typical Performance Data:**


**Gain vs Frequency**

Vd(1,2,3)=(4,2,2)V; Id(1,2,3)=(20,10,10)mA; T=297.6K:

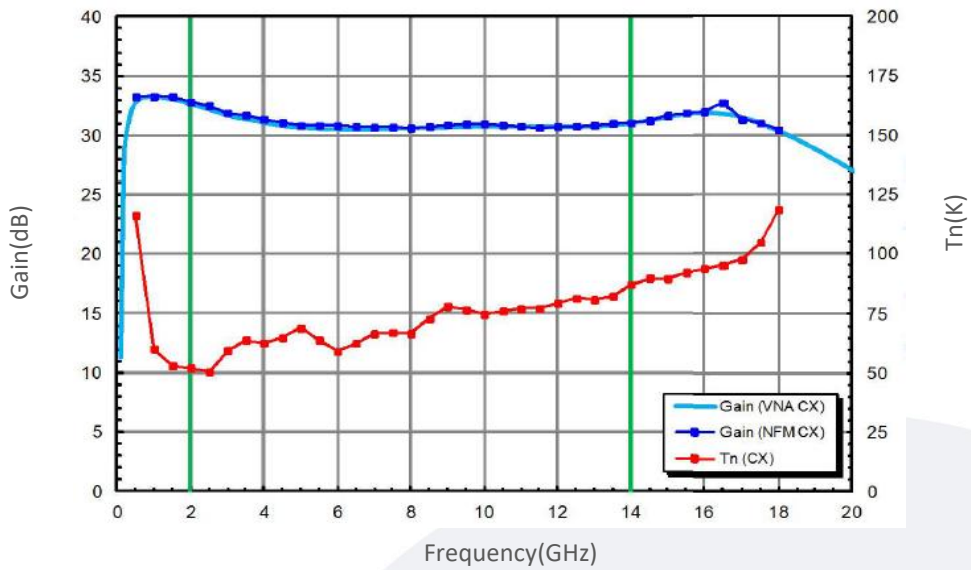

**Gain vs Frequency**

Vd(1,2,3)=(2.4,1.2,1.2)V; Id(1,2,3)=(10,5,5)mA; T=13.6K:

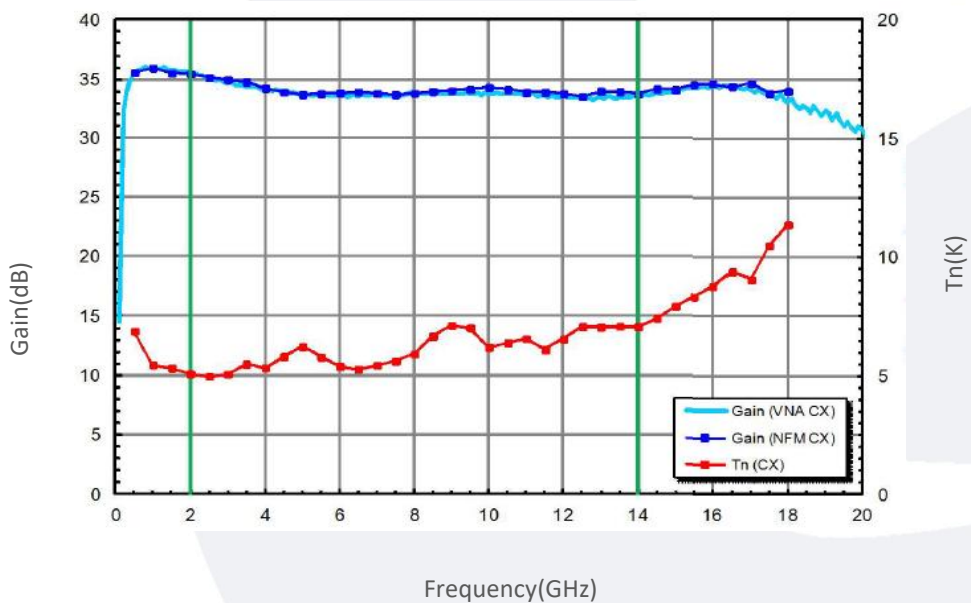


Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

**Typical Performance Data:**


**Return Loss vs Frequency**

$V_d(1,2,3)=(4,2,2)V$ ;  $I_d(1,2,3)=(20,10,10)mA$ ;  $T=300K$ :

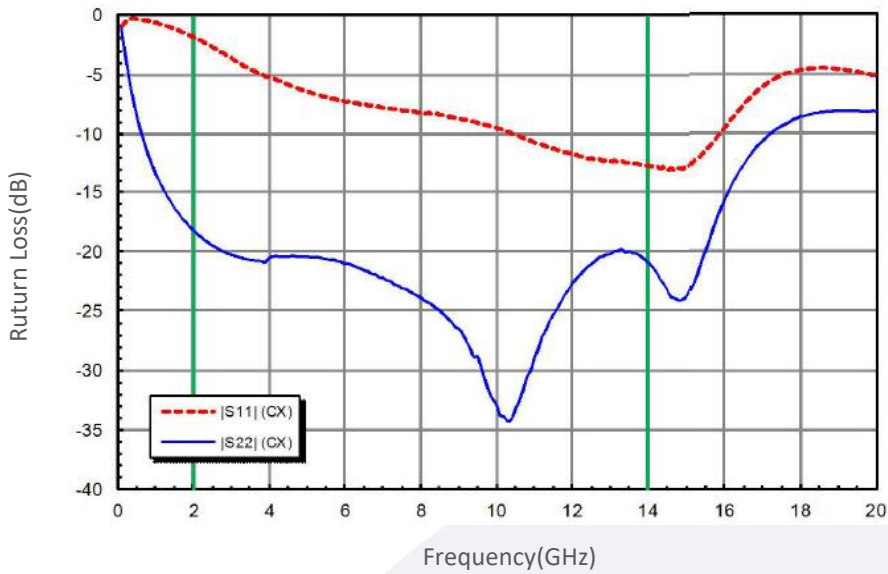

**Return Loss vs Frequency**

$V_d(1,2,3)=(2.4,1.2,1.2)V$ ;  $I_d(1,2,3)=(10,5,5)mA$ ;  $T=19K$ :

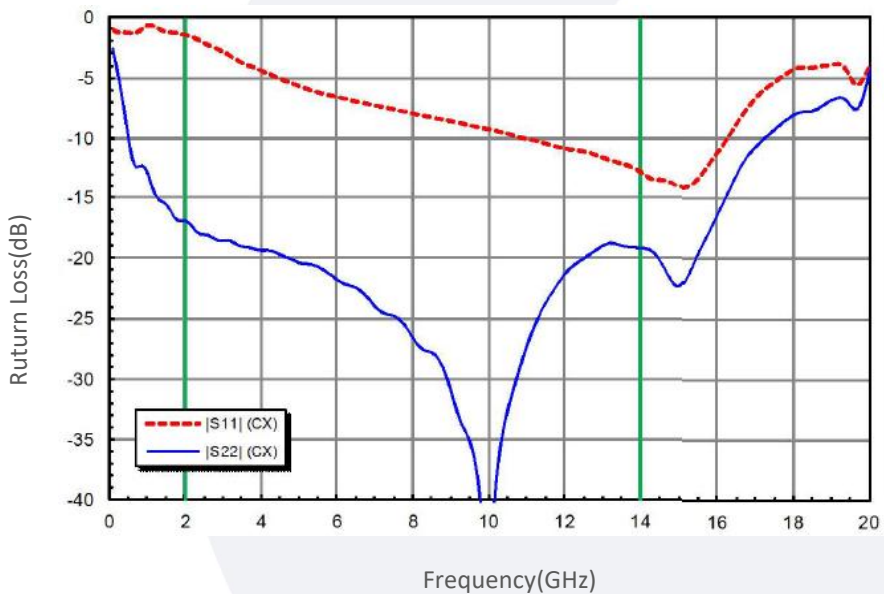

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.