

Coaxial Low-pass Filter

DC-300 KHz/SMA Female

Model: TLLF-DC-300KHz-L

TLLF-DC-300KHz-L is a coaxial low-pass filter with a passband frequency from DC to 300 KHz and a rejection frequency @400 KHz. The maximum insertion loss of the filter is 2.8 dB and the minimum rejection is 40 dB.

Features:

- Passband Frequency Range DC to 300KHz
- Low Insertion Loss

Applications:

- Instrumentations
- Test Labs
- Sub-assemblies


Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Passband Frequency range	DC		300	KHz
Passband Insertion Loss			2.8	dB
Pass band Ripple			2.6	dB
Rejection	>40dB@400KHz			
Power Handling			2	W
VSWR			1.8	:1
Impedance	50			Ohms

Envrionmental And Physical Characteristics:

Description	Parameter	Units
Operating Temerature	-40 To +70	°C
Connectors	SMA Female	
Size	40*12*10	mm

Outline Drawing: Unit:mm

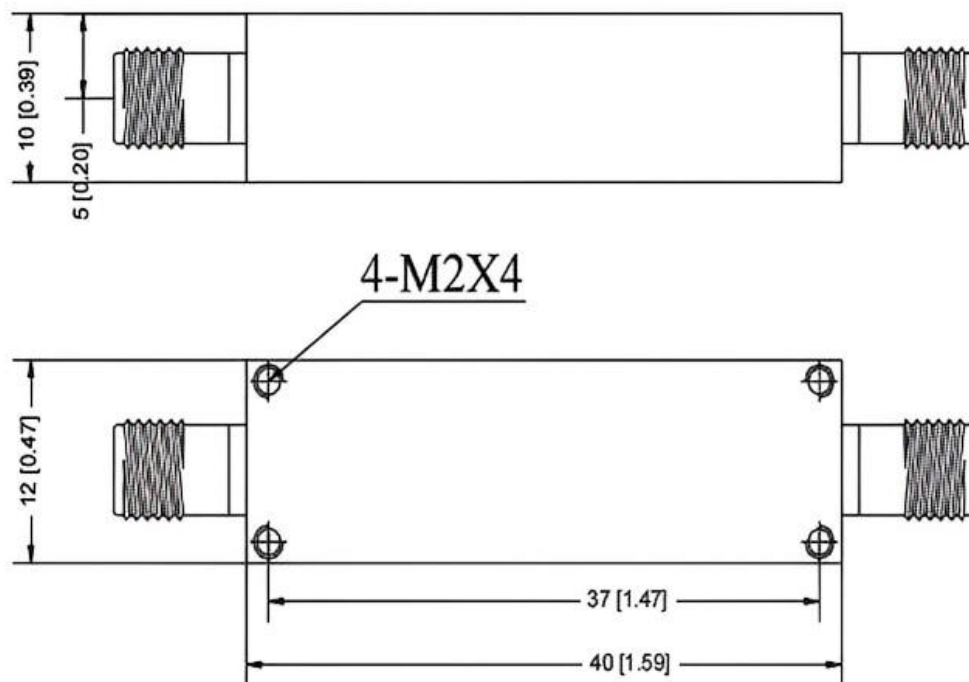

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLLF-DC-300KHz-L	Coaxial Low-pass Filter, Passband frequency range: DC-300KHz, Passband Insertion Loss: 2.8dB, SMA Female	Rev.1.0

Typical Performance Data:



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.