

Solid State High Power Amplifier Systems

2.7-3.1GHz/66dB Gain/65.5dBm Psat/220V AC

Model: TLPA2.7G3.1G-66-65.5-P-BC

TLPA2.7G3.1G-66-65.5-P-BC is a solid state high power amplifier systems provides high output power and high gain across the 2.7 to 3.1 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 2.7-3.1GHz
- Gain: 66dB Min
- Psat Output Power: 65.5dBm Min
- Protection: Over TEM, over voltage, over current ,infinite VSWR
- 50 Ohm Matched Input / Output

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	BW	2.7-3.1			GHz
Working Mode	MOD	PULSE ONLY			
Power Gain	GP	66			dB
Gain flatness@Pout=70dBm	ΔGL		±3		dB
Input Power	Pin		0	5	dBm
Pulse Off Isolation	Piso		80		dBc
Output Psat	Psat	65.5			dBm
Spurious@Pout=65.5dBm	Spur			-60	dBc
Harmonics@Pout=65.5dBm	HAM		-20	-15	dBc
Pulse Delay	Pd		250		ns
Modulation Signal Level (50Ω)	TTL	0		5	V
Modulation Frequency	MF	0.5		20	KHz
Pulse Width	T	0.3		300	us
Duty Cycle	τ			10	%
Rise/Fall Time(10% to 90%)	Tr		50	100	ns
Pulse Width Distortion	PWd		±50		ns
Pulse Drop@T=100us	Pdrop		0.5		dB

Electrical Characteristics:

Parameter	Symbol	Min	Typ	Max	Units
Ground Noise(Pulse on)	NL1		-65.5	-55	dBm/Hz
Ground Noise(Pulse off)	NL2		-140		dBm/Hz
Input VSWR	VSWR			1.5	:1
AC Voltage	Vac	220 VAC,50Hz			V AC
Power Consumption@5% duty cycle	Pdiss		1000		W
Power Consumption@10% duty cycle	Pdiss		2000		W
Impedance	I/O-IMP	50			Ohms

Mechanical Specifications:


Parameter	Value	Units
Input /Output Connector	N Female/L29 Female	
Forward/Reverse Coupling	SMA Female/SMA Female	
Front Panel LCD Screen Display	7 inch LCD Screen Display	
Pulse Input Connector	BNC Female	
Communication Connector	DB-9/RJ-45	
Size	19 Inch 6U*550 depth	mm
Weight	≤50	Kg

Absolute Maximum Ratings:

Parameter	Value
RF Input Power	+5 dBm
ESD sensitivity (HBm)	Class 0, passed 150V

Outline Drawing:

Unit:mm

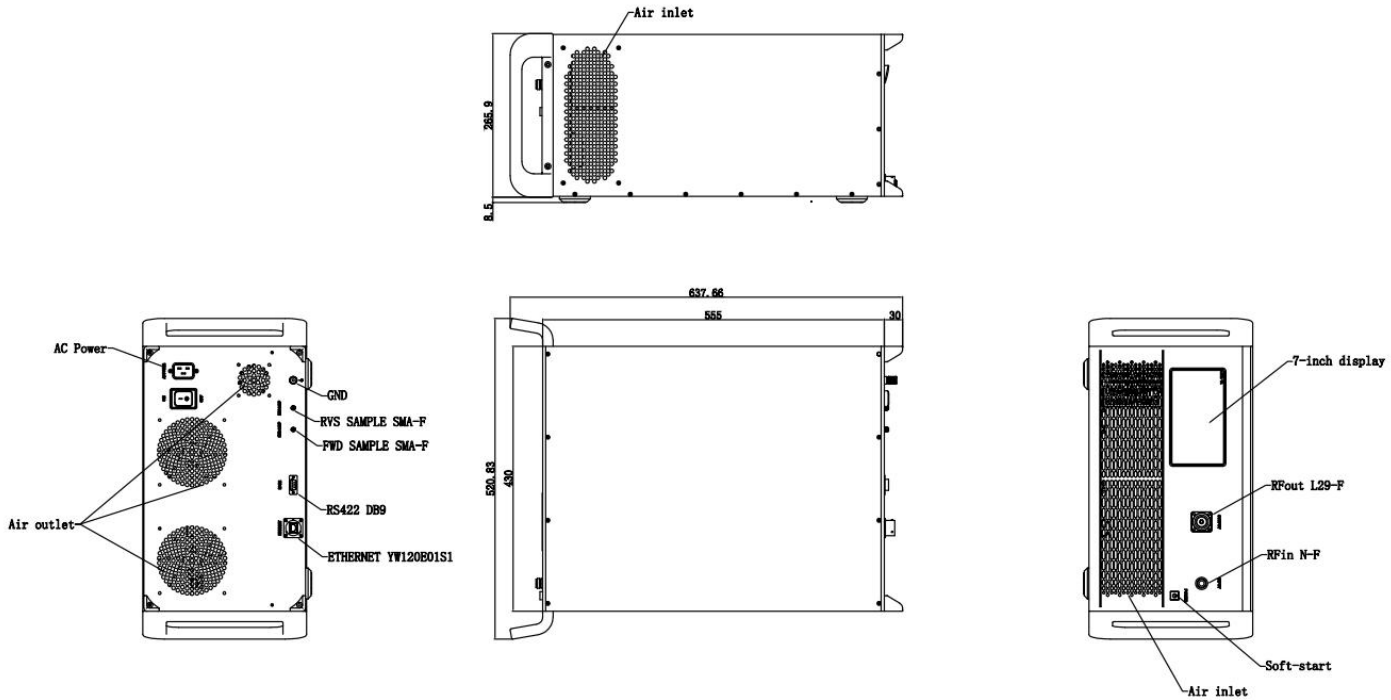

Key Features:

Parameter	Advantages
Control functions	1,Power setting on/off 2,RF setting on/off 3,Gain adjustment 4,ALC automatic level control
Protection functions	1,Over TEM 2,Over voltage 3,Over current 4,Infinite VSWR
Remote control	RS422/Ethernet
Cooling system	Built in Cooling system,forced air cooling

Environmental Conditions:

Parameter	Min	Typ	Max	Units
Operating Temperature*	-20		+40	°C
Non-operating Temperature*	-30		+50	°C
Relative humidity		95		%
Altitude	10,000			feet
Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

Ordering Information:

Base Number	Description	Revision
TLPA2.7G3.1G-66-65.5-P-BC	Solid State High Power Amplifier Systems 2.7-3.1GHz,Gain:66dB,Psat:65.5dBm,220V AC,Built in Fan Cooling	Rev.1.1