

D-Band VNA Frequency Extender 110-170GHz /WR-06

Model: TLVE-110170-6-S

TLVE-110170-6-S frequency extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 110-170 GHz.

Features:

- Ultra Wide Band: 110-170 GHz
- Port Output Power (No Attenuation): 6 dBm Min
- Dynamic Range @ 10 Hz BW: 105dB Min
- Unconditional stability

Applications:

- VNA Frequency Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency range	110		170	GHz
Test Port Output Power	6			dBm
Uncalibrated raw port Return Loss	10			dB
Dynamic Range @ 10Hz BW	105			dB
Directivity	10			dB
RF Input Frequency	9.16		14.17	GHz
RF Input Power	3	5	7	dBm
RF Multiplication Factor		12		
LO Input Frequency	9.16		14.17	GHz
LO Input Power	3	5	7	dBm
LO Multiplication Factor		12		
IF Frequency Range	1		1000	MHz
Stability @ 300 Hz BW(12H)			±0.15	dB
Phase Stability @ 300 Hz BW(12H)			±2.5	°
Effective Directionality@10Hz BW	35			dB
Payload Matching@10Hz BW	40			dB
ReflectionTracking@10Hz BW			±0.15	dB

Transmission Tracking@10Hz BW			±0.05	dB
Output harmonic suppression	15			dB
Power Consumption			10	W


Mechanical Specifications:

Parameter	Value
RF/LO Input Connector	SMA Female
MEA/REFMEA/REF IF Output Connector	SMA Female
Test Port Connector	WR-06/UG-387/U
Power Supply Pin	Type C
Size	100x70x40mm


Absolute Maximum Ratings :

Description	Parameter	Units
RFRF/LO Port Damage Level	+10	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	

Outline Drawing: Unit:mm

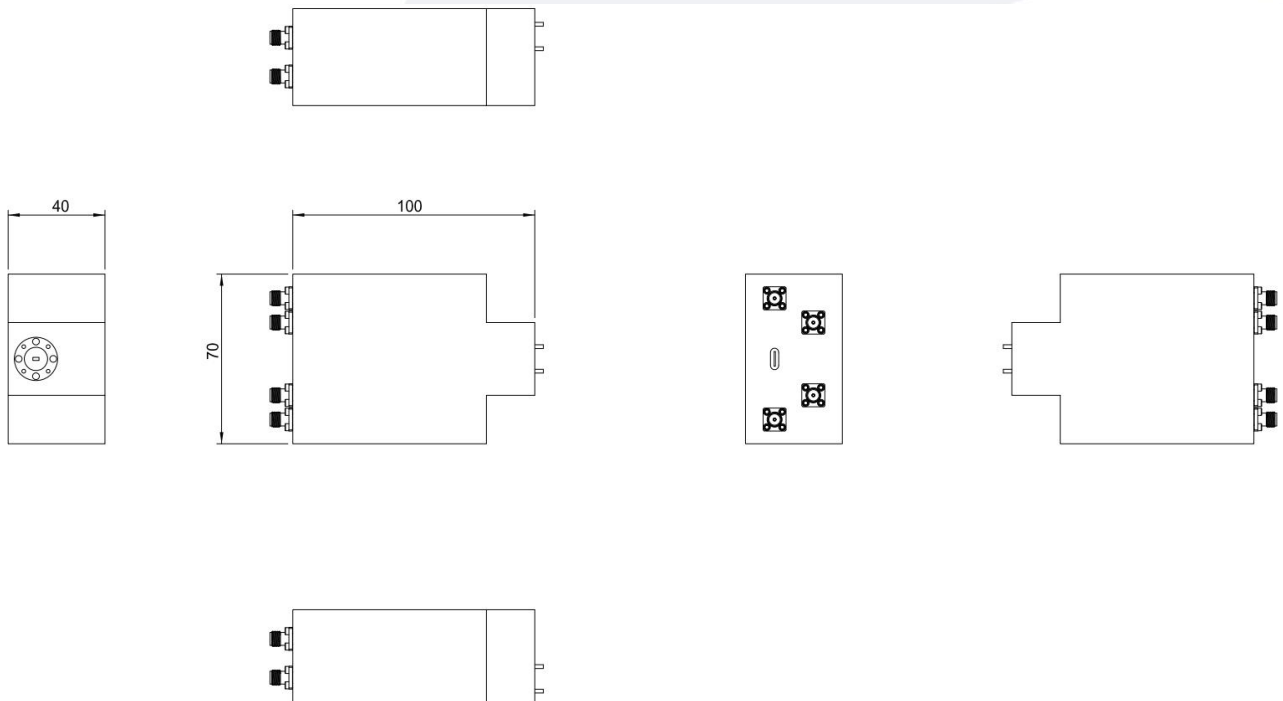

Block Diagrams:

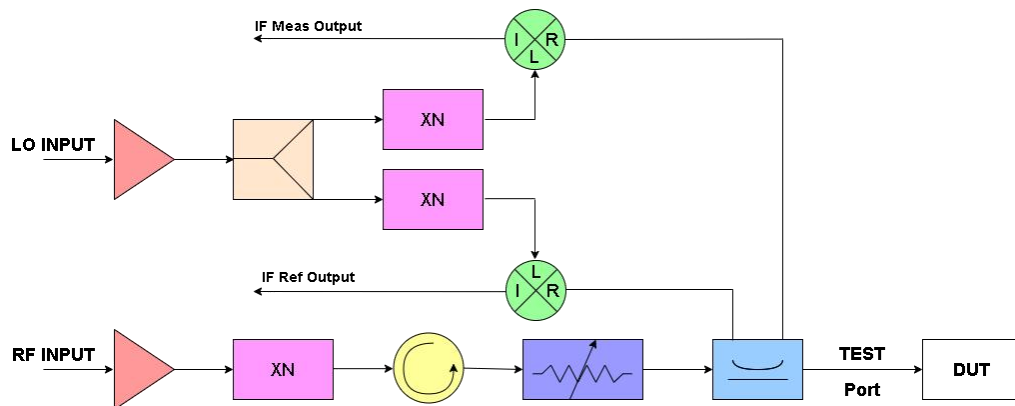

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	0 To +45	°C
Storage Temperature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	

Ordering Information:

Part Number	Description	Revision
TLVE-110170-6-S	D-band VNA Frequency Extender, 110-170GHz, Output Power:6 dBm Min., Dynamic Range:105 dB Min.,Magnitude Stability @ 300 Hz BW:±0.15dB(12H),Phase Stability @ 300 Hz BW:±2.5°(12H)	Rev.1.1

Components Included:

标准型号 Part Number	描述 Description	数量 Quantity
S1-SMAMSMAM-1.2m	COAXIAL CABLE ASSEMBLY	4 PCS
TL-Type C	AC-to-DC Power Adapter	2 PCS
Calibration kit	WR06	1PCS