Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-08/95-110GHz

Model: TLBF-095110-45-08

TLBF-095110-45-08 is a waveguide bandpass filter with a passband frequency from 95 to 110 GHz and a rejection frequency from 75 to 90 GHz and 115 to 140 GHz. The nominal insertion loss of the filter is 2 dB and the typical rejection is 45 dBc. The input and output port configuration offers an inline structure with WR-08 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 95 to 110 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		95		110	GHz
Passband Width			15		GHz
Input/Output VSWR			1.3		:1
Passband Insertion Loss				2	dB
Rejection	@75-90 GHz	45			dBc
	@115-140 GHz	45			


Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temerature	-20 to +55	℃
Storage Temerature	-20 to +55	℃
Material	Aluminum	
Finish	Conductive Coating, Natural Finish	
Waveguide	WR-08/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

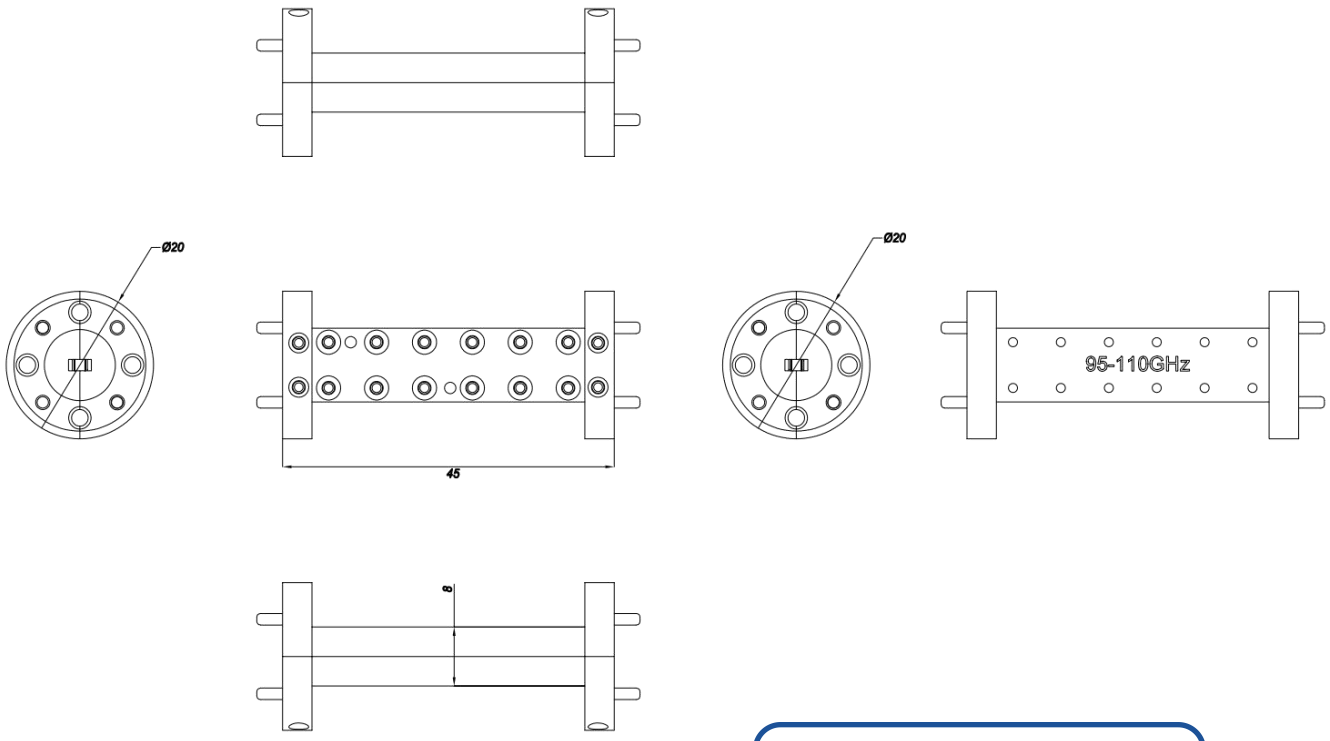

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-095110-45-08	Waveguide Bandpass Filter,95-110GHz, Insertion Loss:2 dB, Rejection:45 dBc@75-90 GHz&115-140 GHz,WR-08/UG-387/U-M	Rev.1.0