Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-12/86-92GHz

Model: TLBF-086092-40-12

TLBF-086092-40-12 is a waveguide bandpass filter with a passband frequency from 86 to 92 GHz and a rejection frequency from 60 to 82 GHz and 96 to 110 GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 40 dBc. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 86 to 92 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		86		92	GHz
Passband Width			6		GHz
Input/Output VSWR			1.25		:1
Passband Insertion Loss				2	dB
Rejection	@60-82 GHz	40			dBc
	@96-110 GHz	40			


Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temerature	-20 to +55	℃
Storage Temerature	-20 to +55	℃
Material	Aluminum	
Finish	Conductive Coating, Natural Finish	
Waveguide	WR-12/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

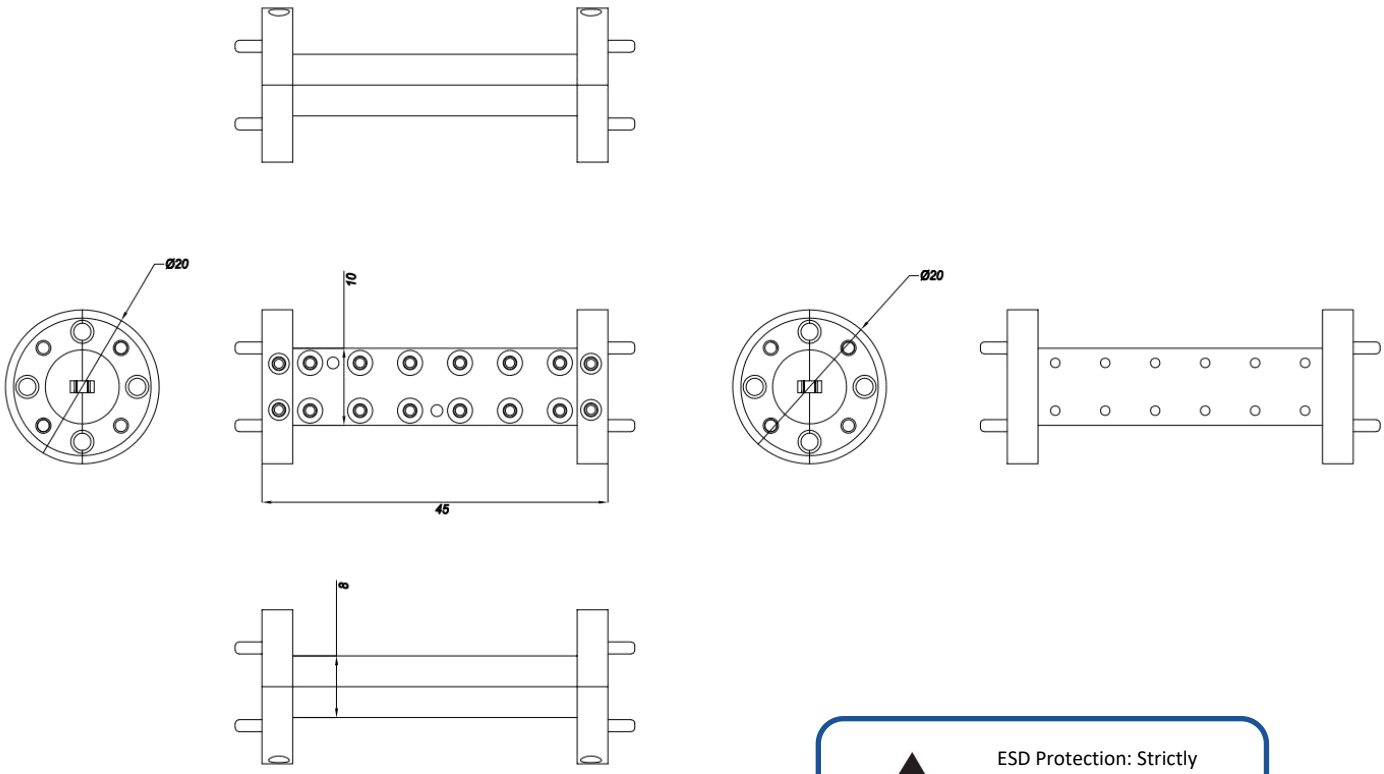

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-086092-40-12	Waveguide Bandpass Filter,86-92GHz, Insertion Loss: 2dB, Rejection: 40dBc@60-82GHz&96-110GHz,WR-12/UG-387/U-M	Rev.1.0