Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-10/92-100GHz

Model: TLBF-092100-45-10

TLBF-092100-45-10 is a waveguide bandpass filter with a passband frequency from 92 to 100 GHz and a rejection frequency from DC to 88 GHz and 104 to 120 GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 45 dBc. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 92 to 100 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		92		100	GHz
Passband Width			8		GHz
Input/Output VSWR			1.3		:1
Passband Insertion Loss				2	dB
Rejection	@DC-88 GHz	45			dBc
	@104-120 GHz	45			


Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temerature	-20 to +55	℃
Storage Temerature	-20 to +55	℃
Material	Aluminum	
Finish	Conductive Coating, Natural Finish	
Waveguide	WR-10/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

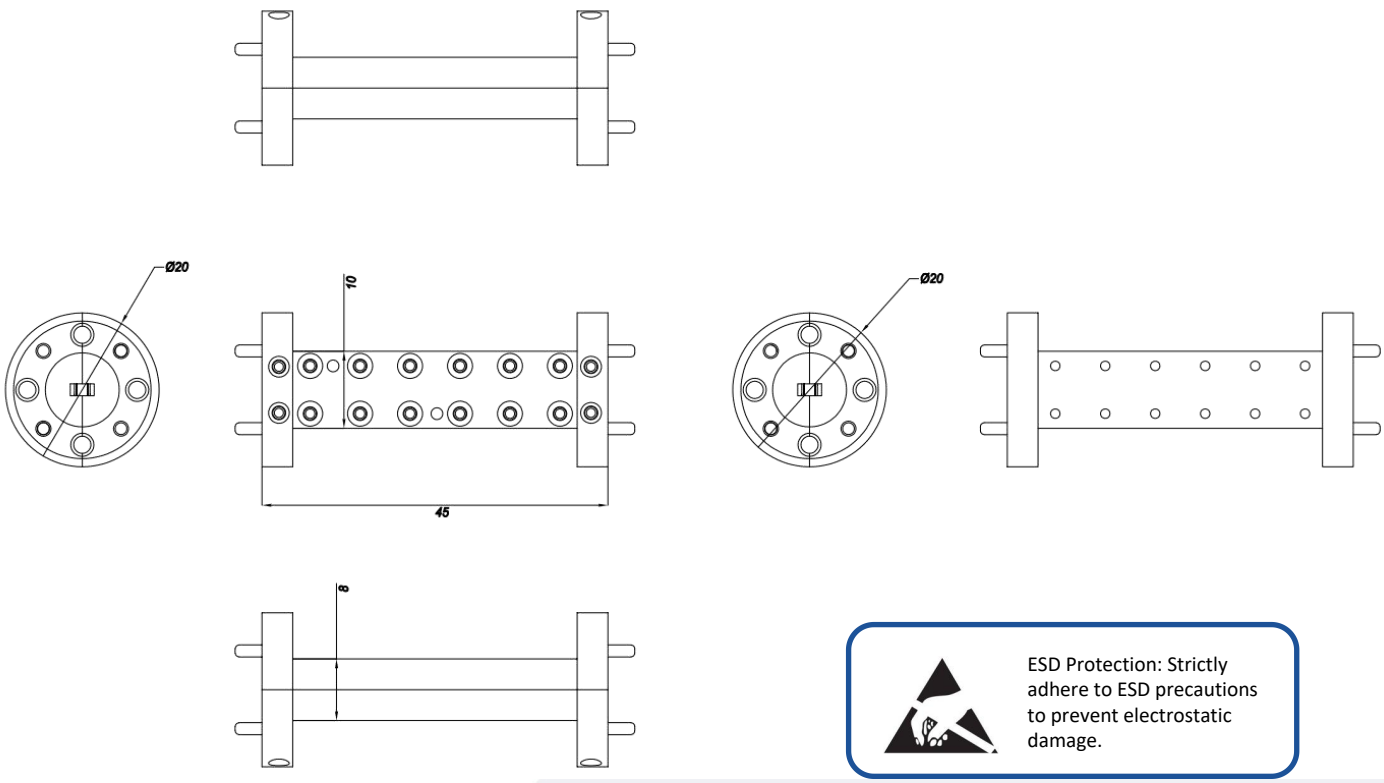

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-092100-45-10	Waveguide Bandpass Filter,92-100GHz, Insertion Loss: 2dB, Rejection: 45dBc@DC-88GHz&104-120GHz,WR-10/UG-387/U-M	Rev.1.0