泰莱微波
Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-08/99-114GHz

Model: TLBF-099114-40-08

TLBF-099114-40-08 is a waveguide bandpass filter with a passband frequency from 99 to 114 GHz and a rejection frequency from DC to 94 GHz and 118 to 140 GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 40 dBc. The input and output port configuration offers an inline structure with WR-08 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 99 to 114 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

Electrical Characteristics:

Parameter		Min	Typ	Max	Units
Passband Frequency range		99		114	GHz
Passband Width			15		GHz
Input/Output VSWR			1.3		:1
Passband Insertion Loss				2	dB
Rejection	@DC-94 GHz	40			dBc
	@118-140 GHz	40			


Envrionmental And Physical Characteristics:

Parameter	Description	Units
Operating Temerature	-20 to +55	℃
Storage Temerature	-20 to +55	℃
Material	Aluminum	
Finish	Conductive Coating, Natural Finish	
Waveguide	WR-08/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Outline Drawing:

Unit:mm; Tolerance:±0.1mm

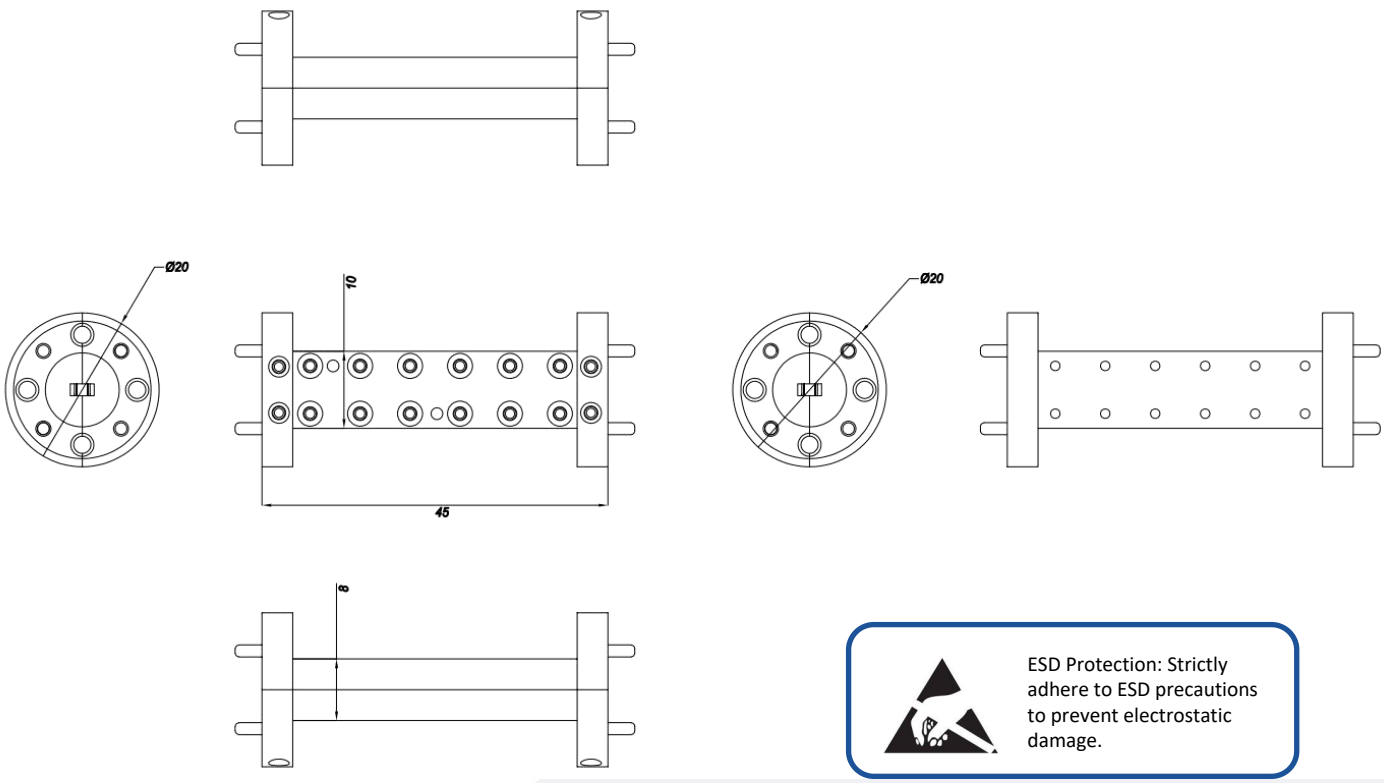

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

Ordering Information:

Base Number	Description	Revision
TLBF-099114-40-08	Waveguide Bandpass Filter,99-114GHz, Insertion Loss: 2dB, Rejection: 40dBc@DC-94GHz&118-140GHz,WR-08/UG-387/U-M	Rev.1.0