

Electrical & Environmental Characteristics


Impedance	50 Ohm
Insulation Resistance	5000 MΩ
Operating Frequency	DC~67GHz
Dielectric Withstanding Voltage	1000V
VSWR	≤1.35
Insertion Loss	≤0.70dB
Operating Temperature	- 55~+125°C

Material & Coat-Plating


Inner Conductor	BE-CU, Gold Plated
Dielectric	PEI
Body	Stainless steel, Passivation

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN	Suzhou Talent Microwave, Inc			
		CHK				
Unit mm	TOLERANCES UNLESS OTHERWISE SPECIFIED 0 PLC ±0.25 1 PLC ±0.15 2 PLC ±0.12 3 PLC ± 3 PLC ± ANGLES ±1°	APVD	Product Model 1.85-JJ 1.85mm Male to 1.85mm Male adaptor			
		PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	SIZE A4	GAGE CODE 0T8L4	DRAWING NO	
		CUSTOMER DRAWING			SHEET1 OF 1	RVE 1

2025-10-11 15:12

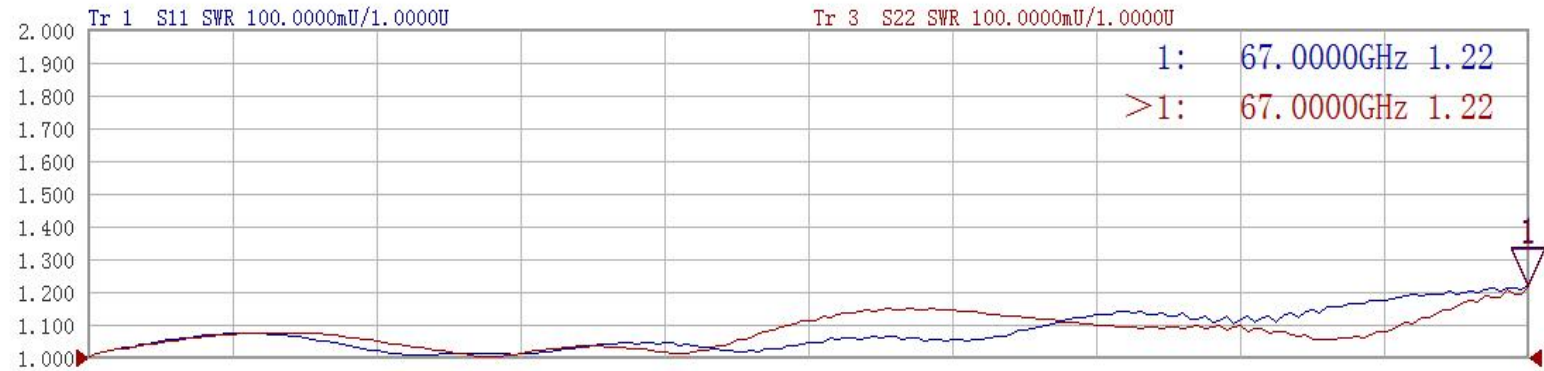

1 Ch1 Start:10.0000MHz --- Stop:67.0000GHz

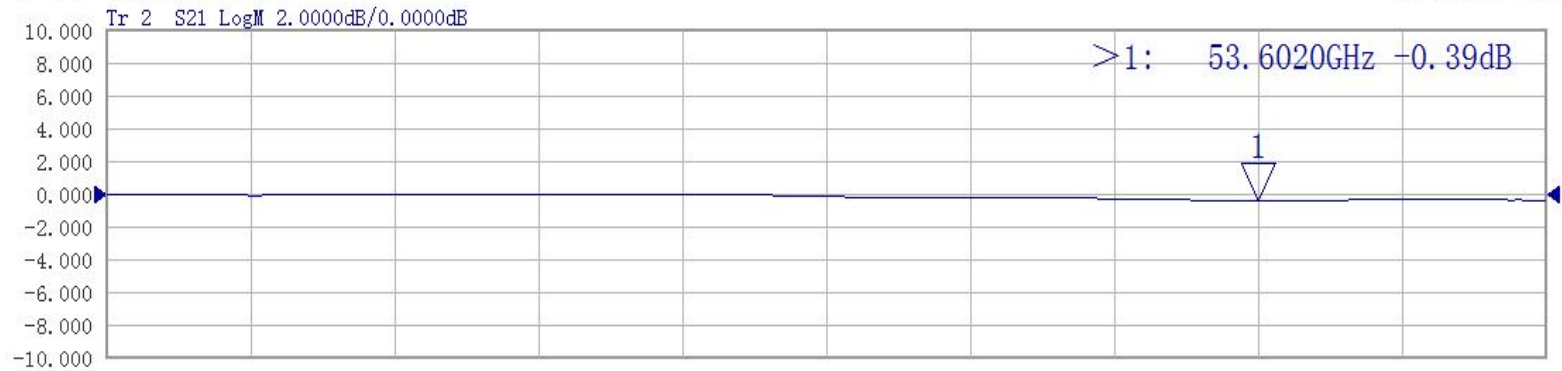

2 Ch1 Start:10.0000MHz - Stop:67.0000GHz