

Coaxial Band-pass Filter

7.25-8.45GHz/ SMA Female

Model: TLBF-7G25-8G45-E

TLBF-7G25-8G45-E is a coaxial band-pass filter with a passband frequency from 7.25 to 8.45 GHz and a rejection frequencies at 5.5GHz , 6.3GHz, 9.4GHz and 10.2GHz . The nominal insertion loss of the filter is 0.8 dB and the typical rejection is 50 dB.

Features:

- Passband Frequency Range: 7.25 to 8.45 GHz
- Low Insertion Loss
- High Rejection
- Steep Rejection Skirts

Applications:

- Instrumentations
- Radar Systems
- System Integrations


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range	7.25		8.45	GHz
通带插损 Passband Insertion Loss			0.8	dB
带内纹波 Pass Band Ripple			0.6	dB
带外抑制 Rejection	>30dB@6300&9400 Mhz >50dB@5500&10200 Mhz			dB
耐受功率 Power Handling			15	W
输入驻波 Input VSWR			1.5	:1
输出驻波 Output VSWR			1.5	:1
阻抗 Impedance	50			Ohms

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +70	℃
存储温度 Storage Temperature	-40 to +70	℃
接口 Connectors	SMA Female	

外形图 Outline Drawing: Unit:mm;

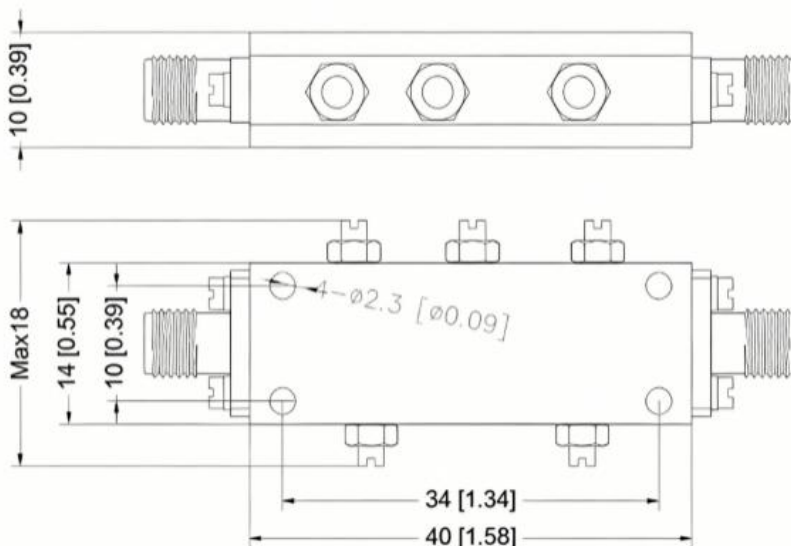

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-7G25-8G45-E	Coaxial Band-pass Filter, Passband frequency range: 7.25 to 8.45 GHz, Passband Insertion Loss: 0.8dB, SMA Female	Rev.1.0