

Part No.: RS2W04180-S

Power Divider /Combiner 2 Way SMA 50Ω 0.4 to 18GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.4-18 GHz

插入损耗 Insertion Loss: ≤1.3dB

驻波 VSWR: ≤1.80 : 1

隔离 Isolation: ≥12dB(400M-500M)
≥15dB(600M-18000M)

幅度平衡 Amplitude Balance: ≤±0.5dB

相位平衡 Phase Balance: ≤±5°

耐功率 Power Handling: 30 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: -55° C - +85° C





接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

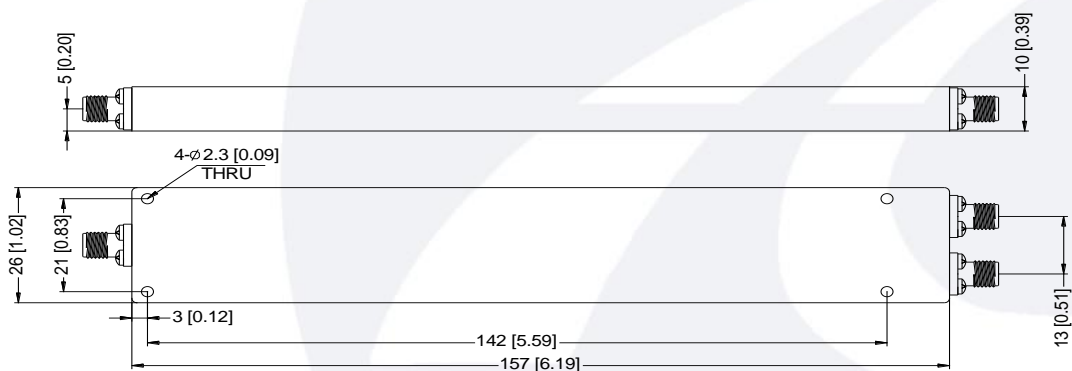

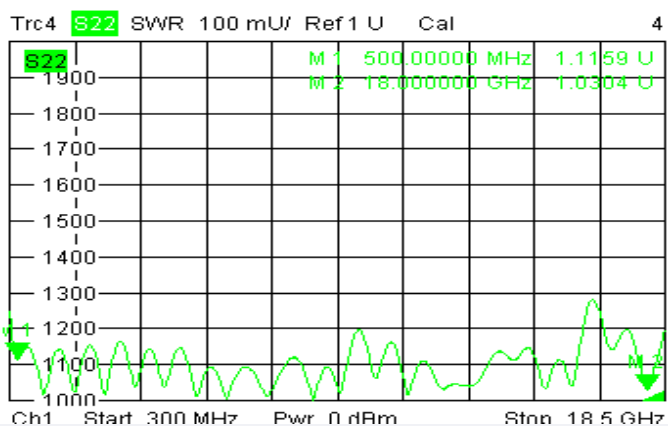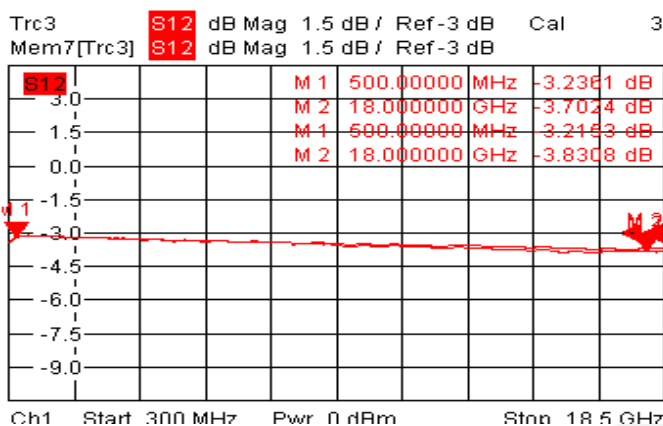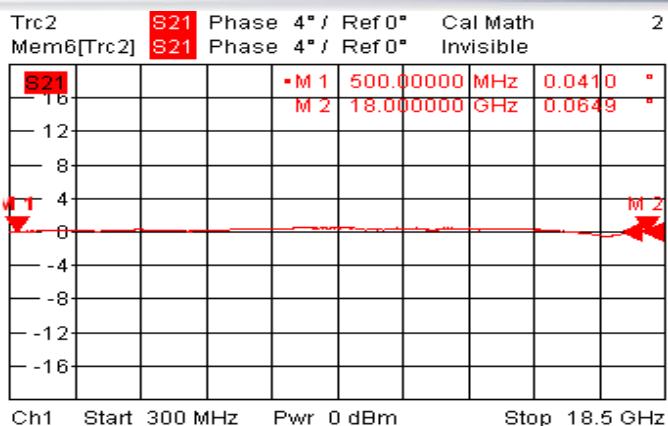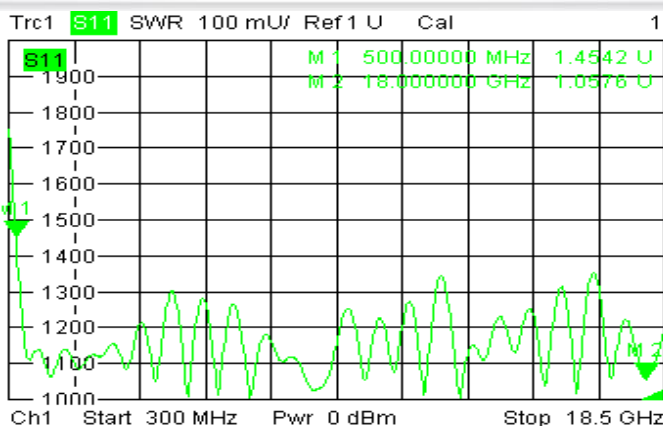

Trc2 **S21** dB Mag 2 dB / Ref -18 dB Cal 2 of 4 (Max)

Mem6[Trc2] **S21** dB Mag 2 dB / Ref -18 dB Invisible

