

Standard Gain Horn Antenna

32.9-50.1GHz/25dBi , Gain/WR-22

Model:TL-22SHA25-T1

TL-22SHA25-T1 is a standard gain horn antenna that operates from 32.9 GHz to 50.1 GHz. The antenna offers 25 dBi nominal gain. The input of this antenna is a WR22 waveguide with BJ400 anti-cocking flange. The standard gain horn is offered for antenna range calibration purpose mainly, but it can be also used for general purpose system set ups.

Features:

- Operating Frequency 32.9 to 50.1 GHz
- Linear Polarization
- Good Impedance Match

Applications:

- Antenna Ranges
- Antenna Gain Measurements
- System Setups

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	32.9		50.1	GHz
增益 Gain		25		dBi
驻波 Input VSWR			1.2	:1

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-40 To +85	°C
存储温度 Storage Temperature	-40 to +85	°C
材质 Material	Copper	
表面处理 Finish	Gold plated	
接口 Connectors	WR-22/BJ400	

外形图 Outline Drawing:

Unit:mm

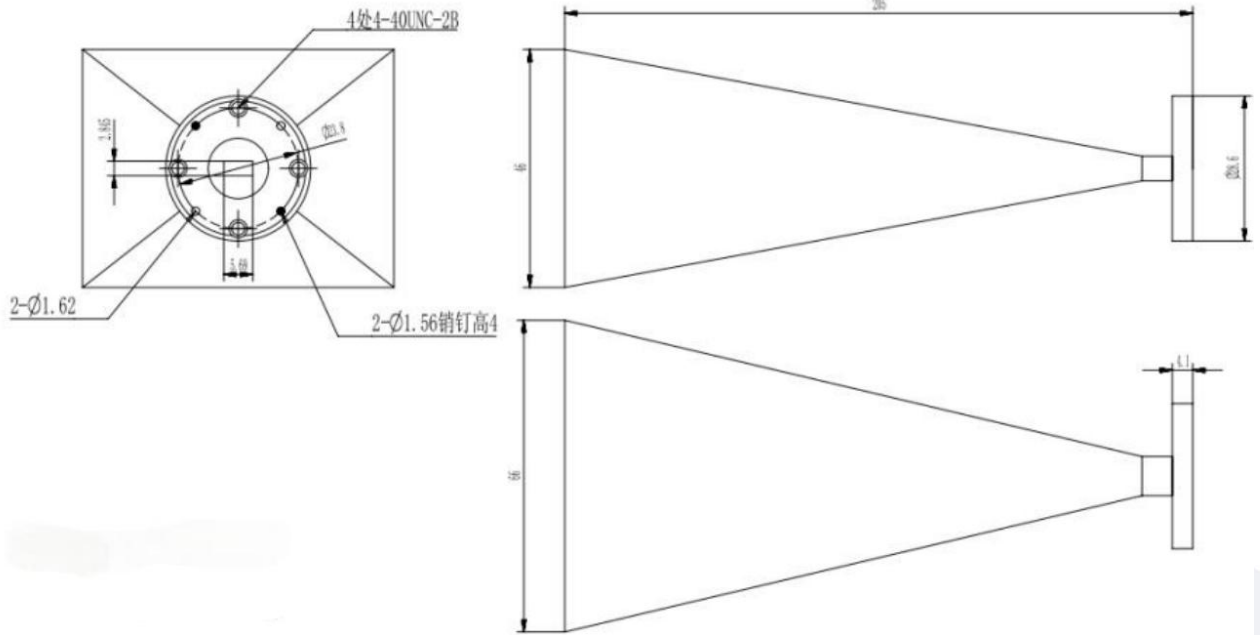

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TL-22SHA25-T1	Standard Gain Horn Antenna, 32.9-50.1GHz, Gain: 25 dBi Typ.	Rev.1.0