

Waveguide to Coax Adapter, End Launch WR-22/2.4mm Male/33-50GHz

Model: TL-22WCA2.4ME-CU

The TL-22WCA2.4ME-CU is end launch waveguide to coax adapters that cover the frequency range of 33 to 50 GHz. It is designed for an efficient transition between the rectangular waveguide and 2.4 mm coax connector.

Features:

- Operating Frequency 33 to 50GHz
- Lower Insertion Loss and VSWR
- Instrumentation Grade
- DC Short Circuit

Applications:

- Test Lab
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	33		50	GHz
插损 Insertion Loss		0.5		dB
驻波 VSWR		1.3		:1

环境和机械特性 Envrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
材质 Material	Brass	
表面处理 Finish	Gold Plated	
同轴接口 Coax Connector	2.4mm Male	
波导 Waveguide	WR-22/UG-383/U-M	
尺寸 Size	ø28.55*18.2	mm

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

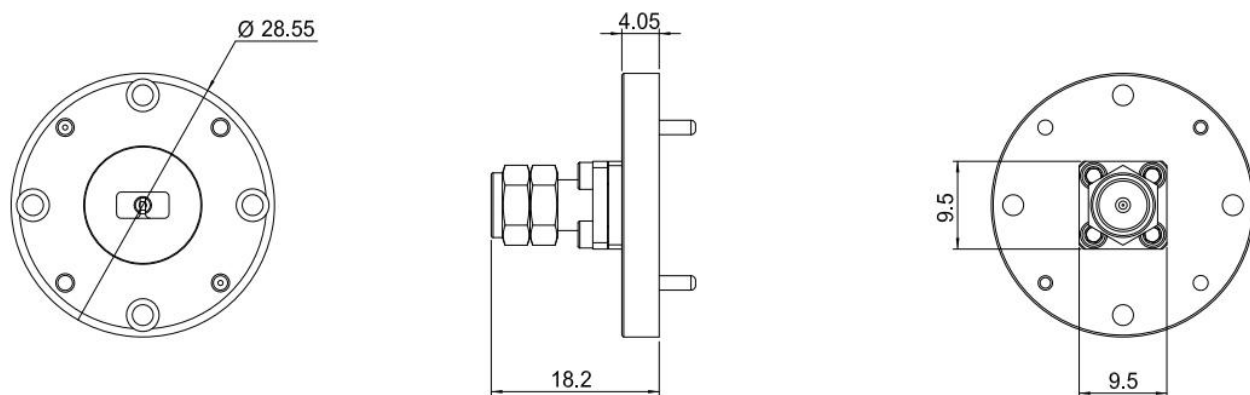

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TL-22WCA2.4ME-CU	Waveguide to Coax Adapter, End Launch WR-22/2.4mm Male,33-50GHz	Rev.1.0