

Waveguide Probe

WR-2.2/330-500GHz

Model:TL-2WPAT1

Features:

- Operating Frequency 330 to 500GHz
- Precisely Machined and Gold Plated
- High Return Loss

Applications:

- 5G Systems
- Antenna Ranges
- Antenna Gain Measurements
- System Setups

电气特性 Electrical Characteristics:


参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	330		500	GHz
输出形式 Output mode	APF2.2			

环境和机械特性 Envriionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
材质 Material	Brass	
表面处理 Finish	Gold plated	
接口 Connectors	WR-2.2/UG-387/U	
尺寸 Size	ø19.1*25.4	mm
重量 Weight	20	g

外形图 Outline Drawing:

Unit:mm

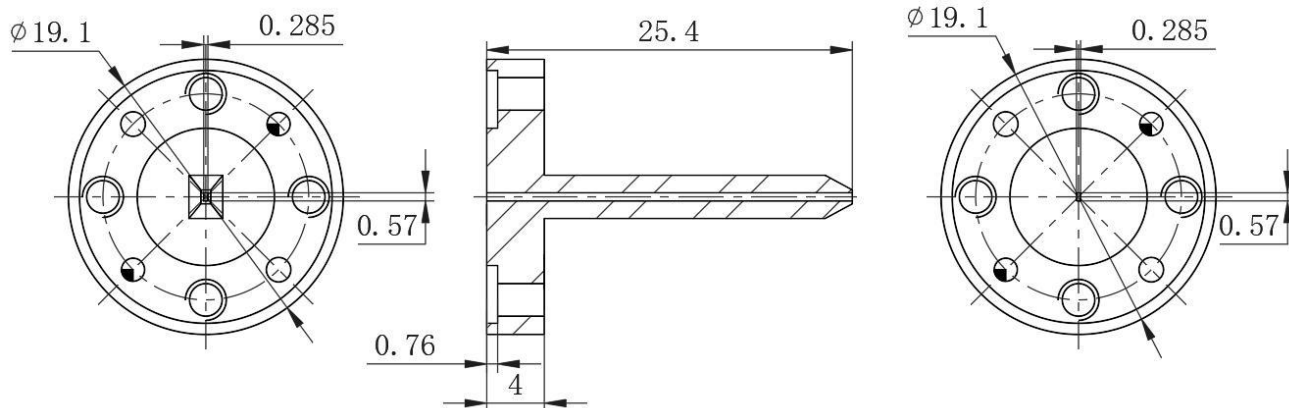

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TL-2WPAT1	Waveguide Probe, 330-500GHz	Rev.1.0