

Low Noise Amplifier

5-6GHz/0.8dB NF/20dB Gain/10dBm P1dB

Model: TLLA5G6G-20-08

TLLA5G6G-20-08 is a low noise amplifier with a typical small signal gain of 20 dB and a nominal noise figure of 0.8 dB across the frequency range of 5 to 6 GHz. The DC power requirement for the amplifier is +5 V DC/60 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 5-6GHz
- Gain: 20dB Typ
- Noise Figure: 0.8dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	5		6	GHz
小信号增益 Small Signal Gain		20		dB
增益平坦度 Gain Flatness			±1.0	dB
噪声系数 Noise Figure		0.8	1.2	dB
线性输出功率 Output P1dB		10		dBm
饱和输出功率 Output Psat		12		dBm
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		+5	+8	V DC
直流电流 DC Supply Current		60		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	20*28*10	mm


绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+8 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

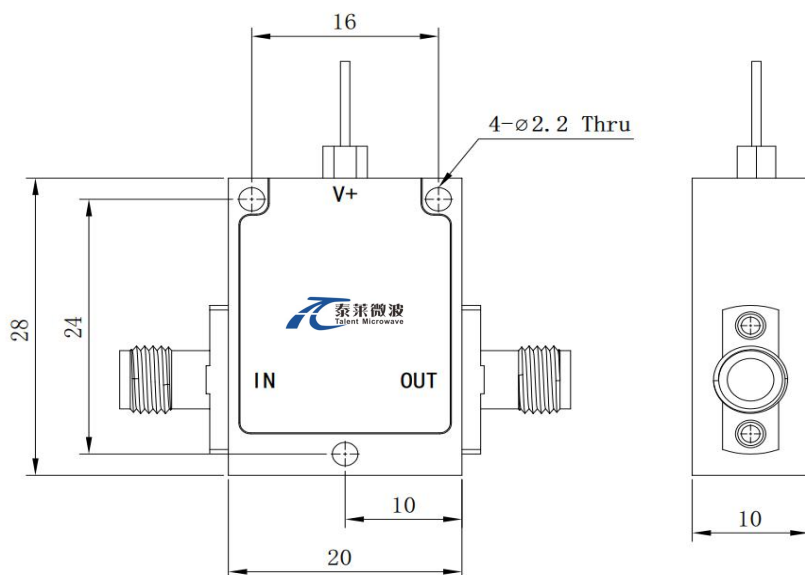

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA5G6G-20-08	Low Noise Amplifier, 5-6GHz, Noise Figure:0.8dB, Gain:20dB,P1dB:10dBm,+5V DC,Without Heatsink	Rev.1.0
TLLA5G6G-20-08-HS	Low Noise Amplifier, 5-6GHz, Noise Figure:0.8dB, Gain:20dB,P1dB:10dBm,+5V DC,Without Heatsink	Rev.1.0

典型曲线 Typical Performance Data:

Gain&VSWR vs Frequency

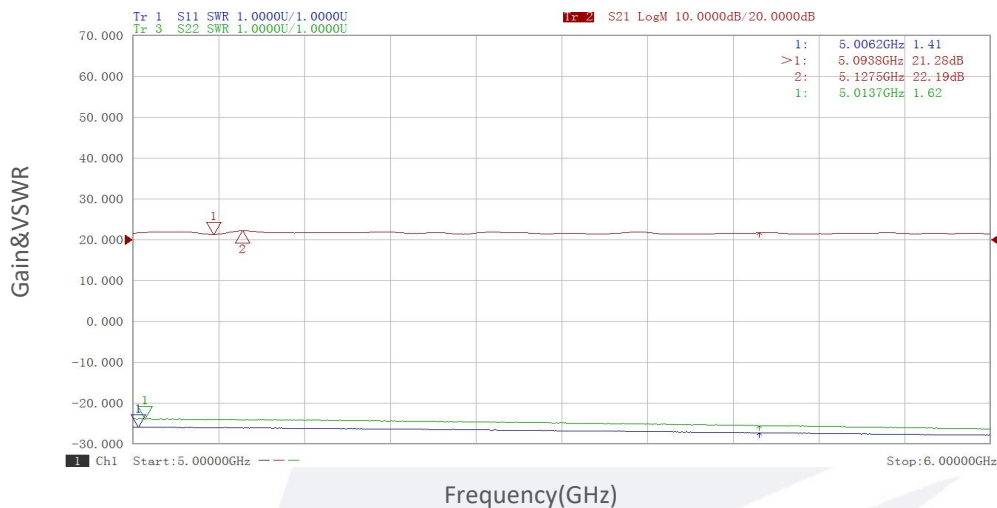


Noise Figure vs Frequency




Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:


Gain vs Output Power

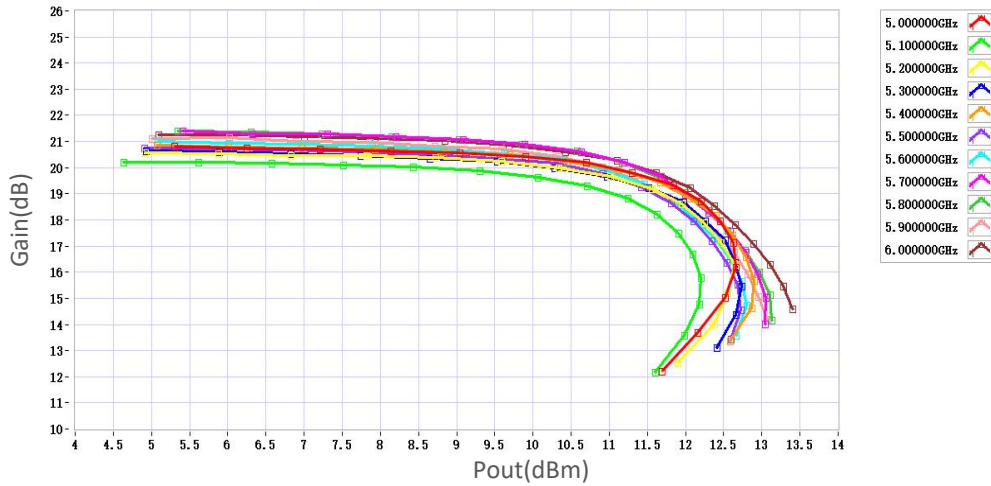

P1dB vs Frequency

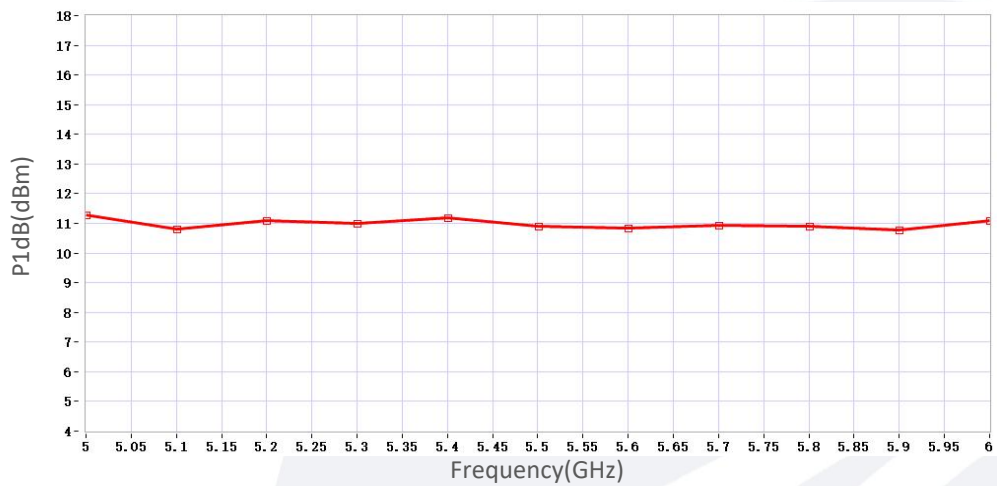


P3dB vs Frequency

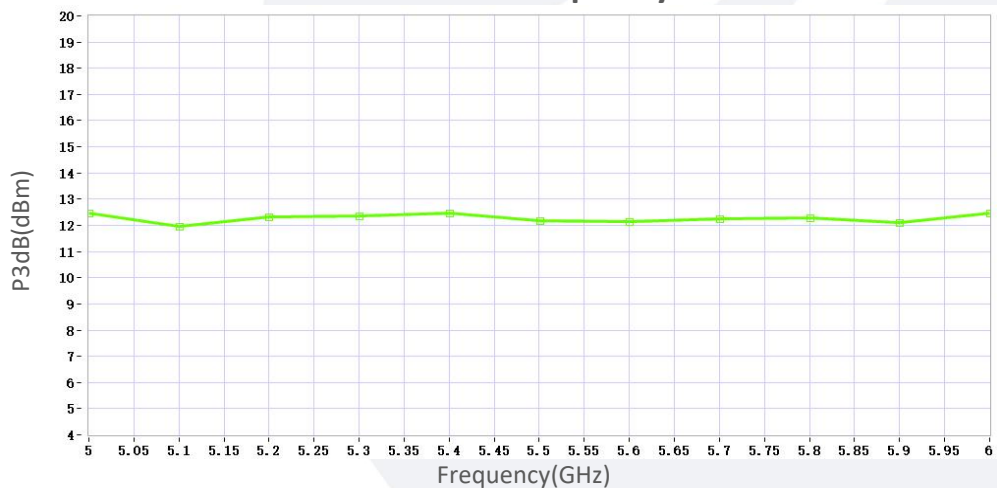

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.

典型曲线 Typical Performance Data:

Psat vs Frequency

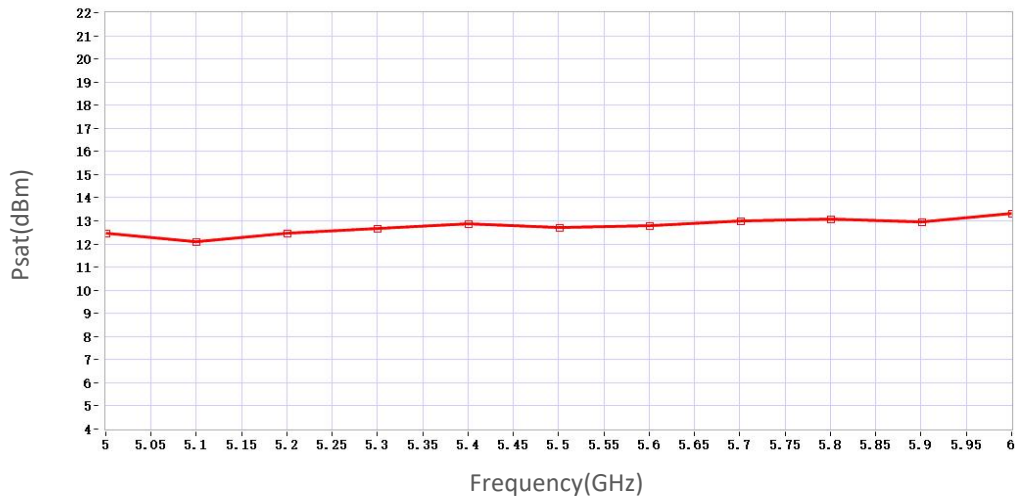

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.