

Waveguide Bandpass Filter

WR-10/85-95GHz

Model: TLBF-085095-45

TLBF-085095-45 is a waveguide bandpass filter with a passband frequency from 85 to 95 GHz and a rejection frequency from 75 to 80 GHz and 100 to 110 GHz. The nominal insertion loss of the filter is 2 dB and the typical rejection is 45 dBc. The input and output port configuration offers an inline structure with WR-10 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 85 to 95 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:







参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		85		95	GHz
通带带宽 Passband Width			10		GHz
输入/输出驻波 Input/Output VSWR			1.3		:1
通带插损 Passband Insertion Loss				2	dB
带外抑制 Rejection	@ 75-80 GHz	45			dBc
	@ 100-110 GHz	45			

环境和机械特性 Envrrionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-20 To +55	°C
存储温度 Storage Temerature	-20 to +55	°C
材质 Material	Aluminum	
表面处理 Finish	Conductive Coating, Natural Finish	
波导 Waveguide	WR-10/UG-387/U-M	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

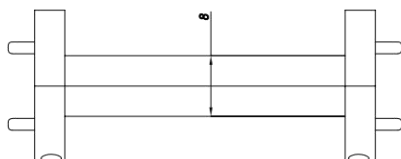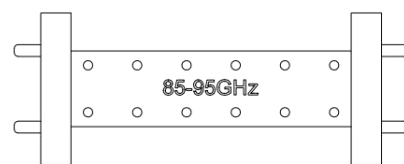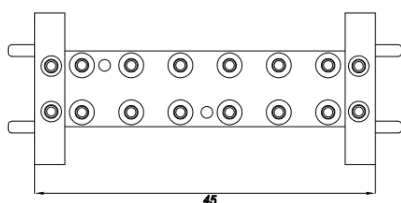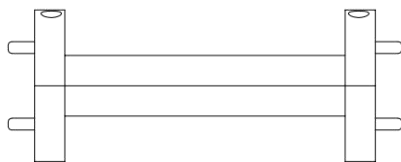

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-085095-45	Waveguide Bandpass Filter, 85-95GHz, Insertion Loss: 2 dB, Rejection: 45 dBc @ 75-80 GHz & 100-110 GHz, WR-10/UG-387/U-M	Rev.1.0