

Waveguide Band Pass Filter

WR-10/91-99GHz

Model: TLBF-091099-30

Features:

- Passband Frequency Range 91 to 99GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies


电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		91		99	GHz
通带插损 Passband Insertion Loss			1		dB
带外抑制 Rejection	@87GHz		-30		dBc
	@106GHz		-30		
3dB带宽 Approximate 3dB Bandwidth		90		101	GHz

环境和机械特性 Envirionmental And Physical

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temerature	-40 To +85	℃
存储温度 Storage Temerature	-40 to +85	℃
材质 Material	Copper	
表贴 Finish	Gold Plated	
波导接口 Waveguide	WR-10/UG-387/U-M	


外形图 Outline Drawing: Unit:mm

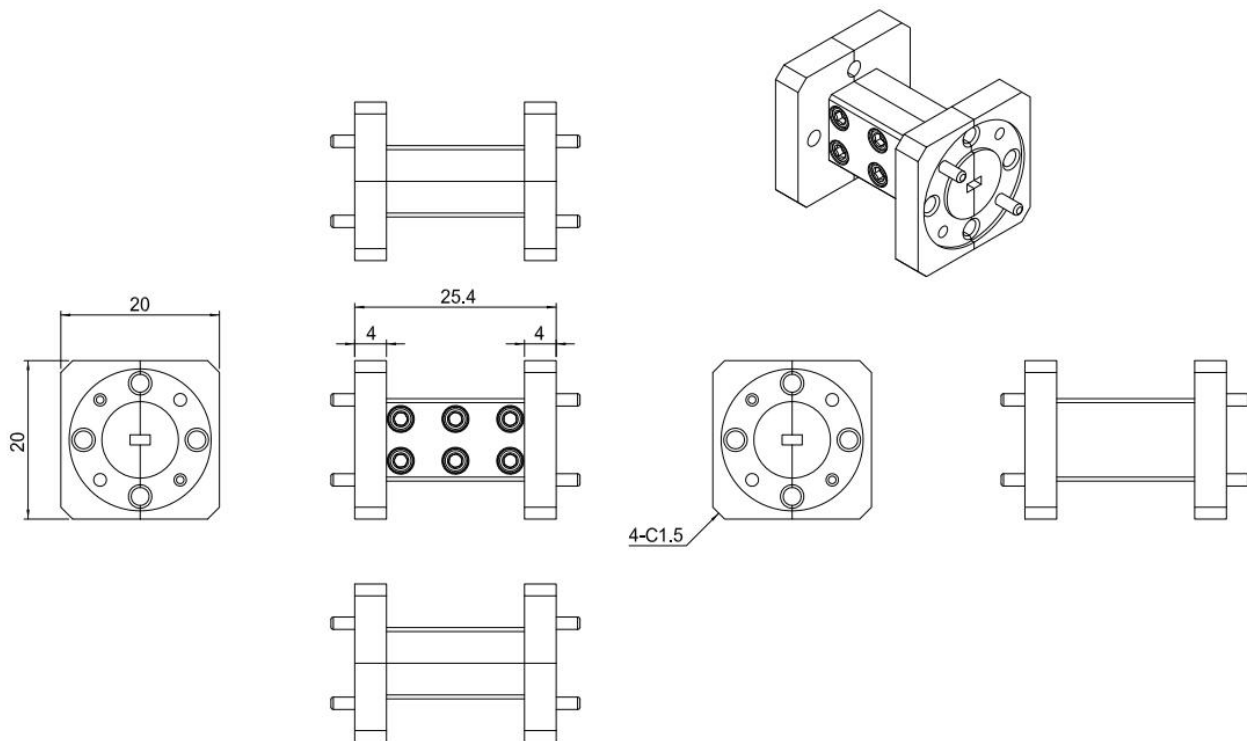

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-091099-30	Waveguide Band Pass Filter,91-99GHz,Insertion Loss:1.0dB, Rejection:-30dBc@87GHz&106GHz,WR-10/UG-387/U-M	Rev.1.1

测试曲线 Typical Performance Data:

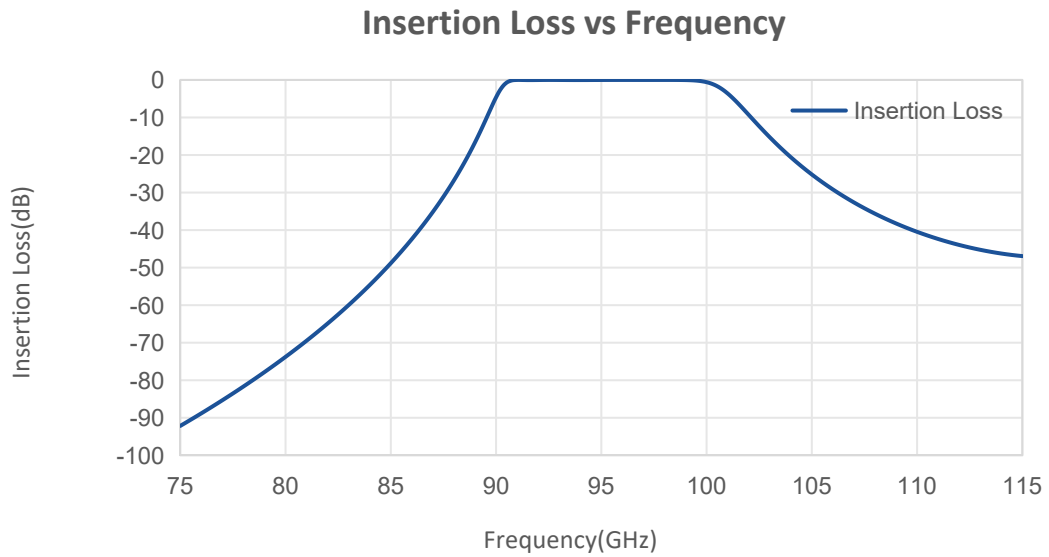

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.