

Waveguide Bandpass Filter

WR-15/55-62GHz

Model: TLBF-055062-45-15

TLBF-055062-45-15 is a waveguide bandpass filter with a passband frequency from 55 to 62 GHz and a rejection frequency from DC to 50 GHz and 68 to 75 GHz. The nominal insertion loss of the filter is 2 dB and the typical rejection is 45 dBc. The input and output port configuration offers an inline structure with WR-15 waveguides and UG-385/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 55 to 62 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		55		62	GHz
通带带宽 Passband Width			7		GHz
输入/输出驻波 Input/Output VSWR			1.25		:1
通带插损 Passband Insertion Loss				2	dB
带外抑制 Rejection	@DC-50 GHz	45			dBc
	@68-75 GHz	45			

环境和机械特性 Envrionmental And Physical Characteristics:

参数 Parameter	类型 Description	单位 Units
操作温度 Operating Temerature	-20 to +55	°C
存储温度 Storage Temerature	-20 to +55	°C
材质 Material	Aluminum	
表面处理 Finish	Conductive Coating, Natural Finish	
波导 Waveguide	WR-15/UG-385/U-M	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

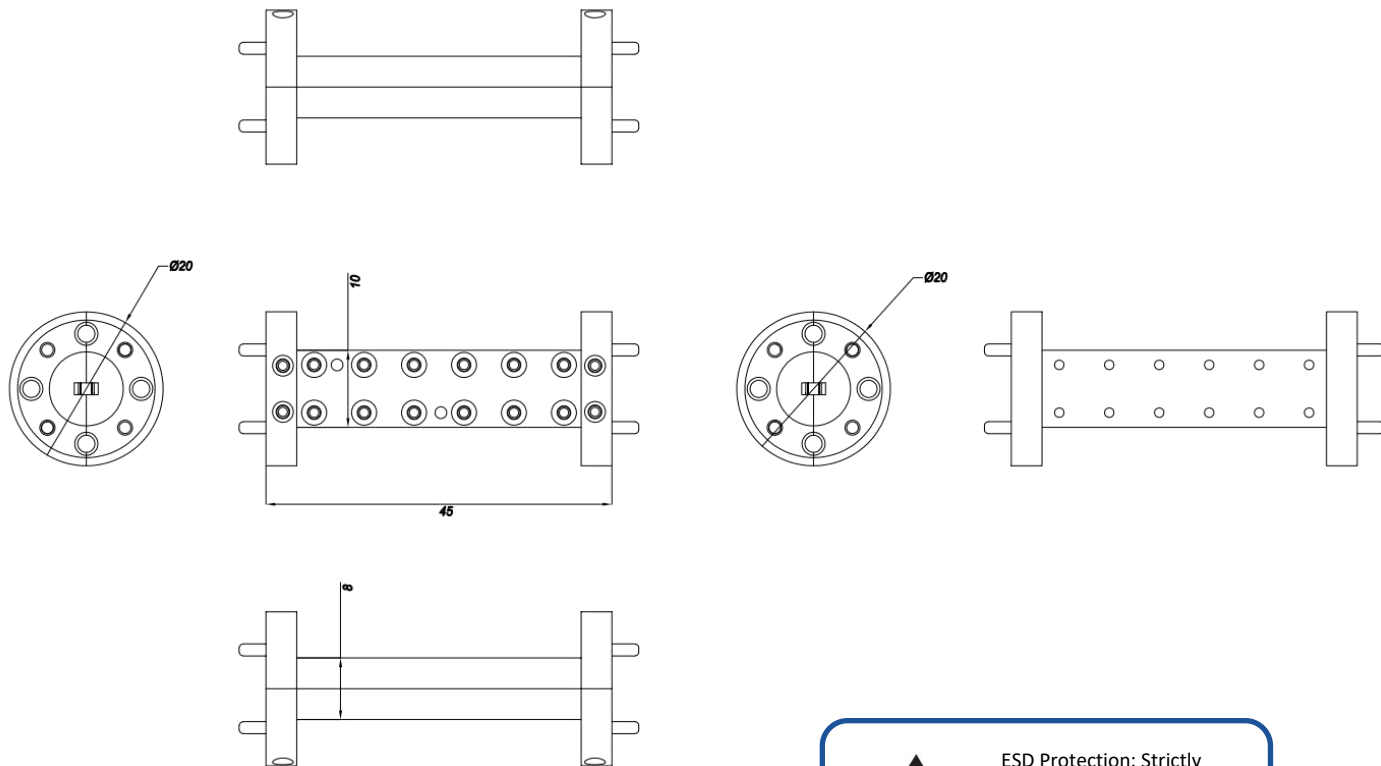

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-055062-45-15	Waveguide Bandpass Filter,55-62GHz, Insertion Loss: 2dB, Rejection: 45dBc@DC-50GHz&68-75GHz,WR-15/UG-385/U-M	Rev.1.0