

Waveguide Bandpass Filter

WR-12/71-76GHz

Model: TLBF-071076-50-12

TLBF-071076-50-12 is a waveguide bandpass filter with a passband frequency from 71 to 76 GHz and a rejection frequency from DC to 67 GHz and 81 to 90 GHz. The nominal insertion loss of the filter is 2 dB and the typical rejection is 50 dBc. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 71 to 76 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		71		76	GHz
通带带宽 Passband Width			5		GHz
输入/输出驻波 Input/Output VSWR			1.25		:1
通带插损 Passband Insertion Loss				2	dB
带外抑制 Rejection	@DC-67 GHz	50			dBc
	@81-90 GHz	50			

环境和机械特性 Envrionmental And Physical Characteristics:

参数 Parameter	类型 Description	单位 Units
操作温度 Operating Temerature	-20 to +55	°C
存储温度 Storage Temerature	-20 to +55	°C
材质 Material	Aluminum	
表面处理 Finish	Conductive Coating, Natural Finish	
波导 Waveguide	WR-12/UG-387/U-M	

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

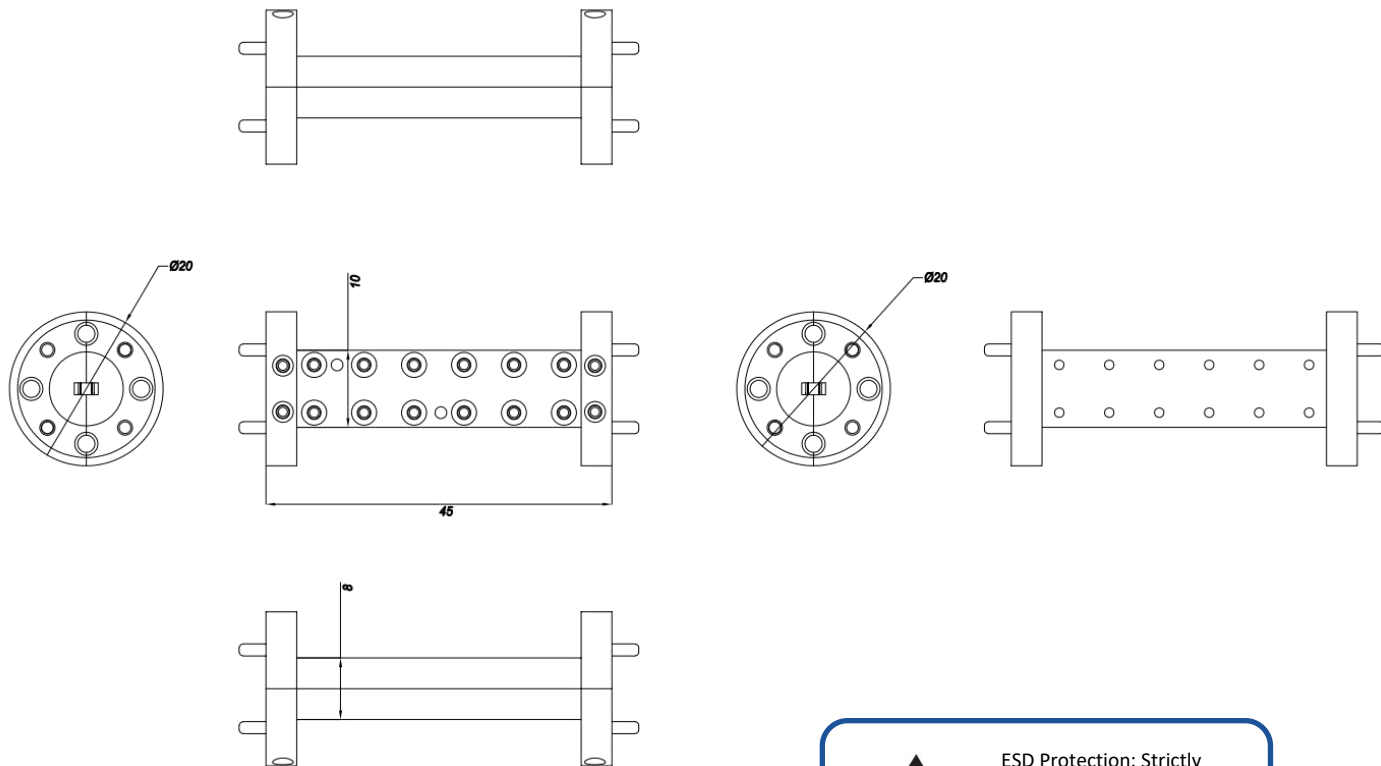

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-071076-50-12	Waveguide Bandpass Filter, 71-86GHz, Insertion Loss: 2dB, Rejection: 50dBc@DC-67GHz&81-90GHz, WR-12/UG-387/U-M	Rev.1.0