泰莱微波 Talent Microwave
Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-6.5/135-145GHz

Model: TLBF-135145-45-6.5

TLBF-135145-45-6.5 is a waveguide bandpass filter with a passband frequency from 135 to 145 GHz and a rejection frequency from DC to 130 GHz and 150 to 170 GHz. The maximum insertion loss of the filter is 2 dB and the minimum rejection is 45 dBc. The input and output port configuration offers an inline structure with WR-6.5 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 135 to 145 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		135		145	GHz
通带带宽 Passband Width			10		GHz
驻波 VSWR			1.3		:1
通带插损 Passband Insertion Loss				2	dB
带外抑制 Rejection	@DC-130Hz	45			dBc
	@150-170GHz	45			


环境和机械特性 Envrionmental And Physical Characteristics:

参数 Parameter	指标 Value	单位 Units
操作温度 Operating Temerature	-20 to +55	℃
存储温度 Storage Temerature	-20 to +55	℃
材质 Material	Aluminum	
表面处理 Finish	Conductive Coating, Natural Finish	
波导 Waveguide	WR-6.5/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

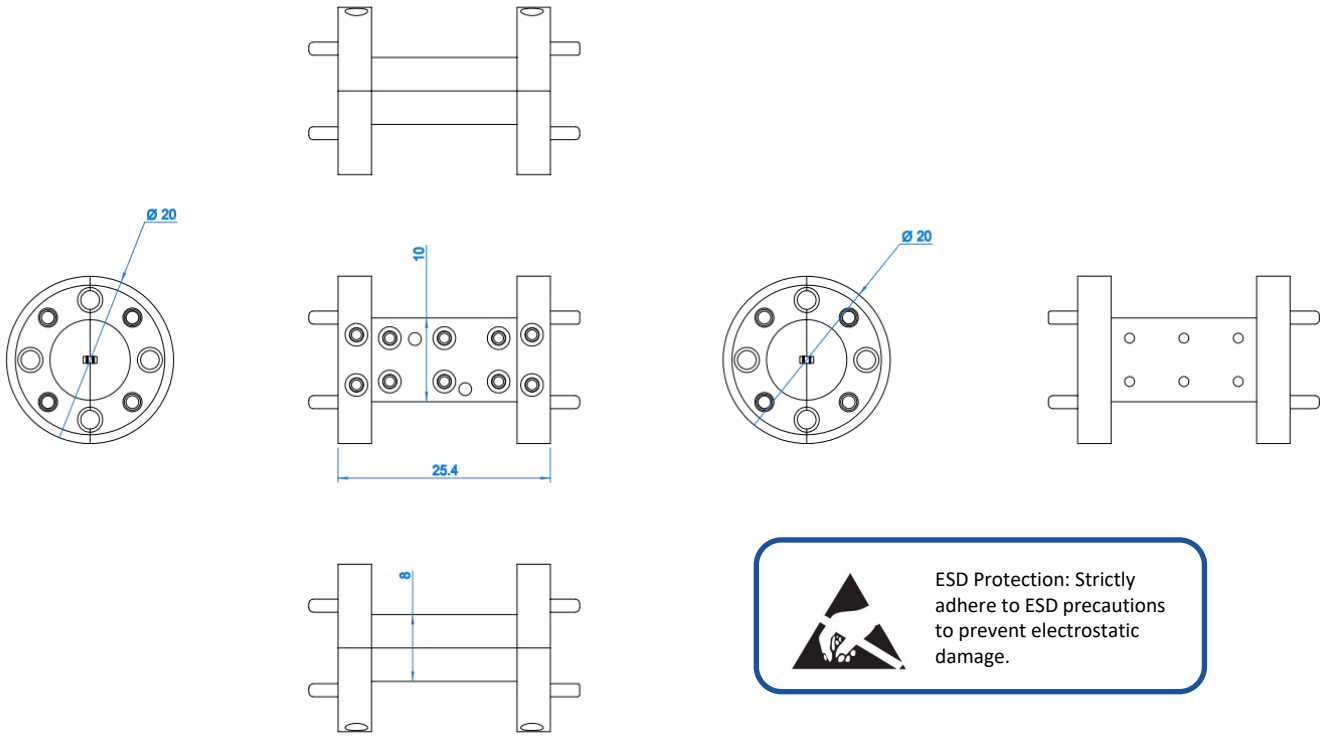

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-135145-45-6.5	Waveguide Bandpass Filter, 135-145GHz,Insertion Loss:2dB, Rejection:45dBc@DC-130GHz&150-170GHz, WR-6.5	Rev.1.0