泰莱微波 Talent Microwave
Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Bandpass Filter

WR-6.5/139-155GHz

Model: TLBF-139155-40-6.5

TLBF-139155-40-6.5 is a waveguide bandpass filter with a passband frequency from 139 to 155 GHz and a rejection frequency from DC to 134 GHz and 140 to 170 GHz. The typical insertion loss of the filter is 1.5 dB and the minimum rejection is 40 dBc. The input and output port configuration offers an inline structure with WR-6.5 waveguides and UG-387/U-M anti-cocking flanges.

Features:

- Passband Frequency Range 139 to 155 GHz
- Lower Cost
- Low Insertion Loss
- High Rejection

Applications:

- Communicatin Systems
- Radar Systems
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter		Min	Typ	Max	单位 Units
通带频率范围 Passband Frequency range		139		155	GHz
通带带宽 Passband Width			16		GHz
驻波 VSWR			1.3		:1
通带插损 Passband Insertion Loss			1.5	2.5	dB
带外抑制 Rejection	@DC-134GHz	40			dBc
	@140-170GHz	40			


环境和机械特性 Envrionmental And Physical Characteristics:

参数 Parameter	指标 Value	单位 Units
操作温度 Operating Temerature	-20 to +55	℃
存储温度 Storage Temerature	-20 to +55	℃
材质 Material	Aluminum	
表面处理 Finish	Conductive Coating, Natural Finish	
波导 Waveguide	WR-6.5/UG-387/U-M	

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

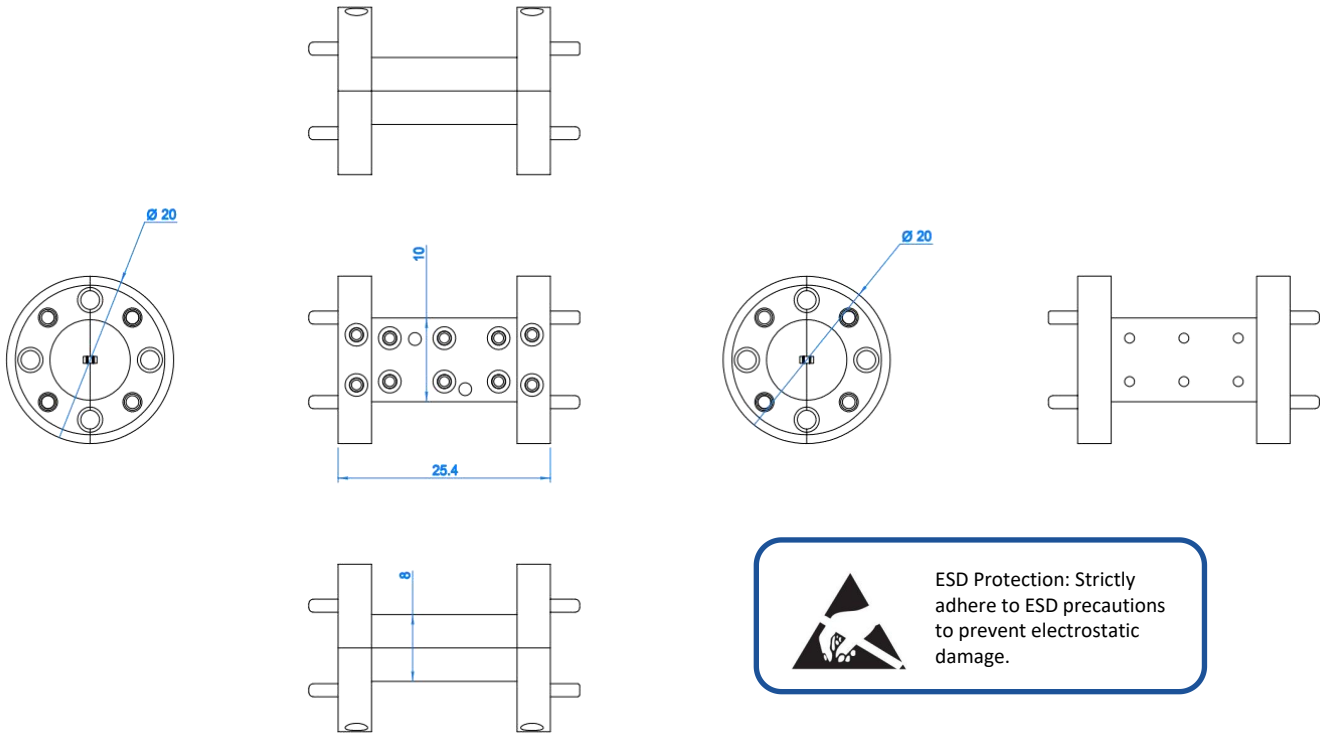

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLBF-139155-40-6.5	Waveguide Bandpass Filter, 139-155GHz,Insertion Loss:1.5dB, Rejection:40dBc@DC-134GHz&140-170GHz, WR-6.5	Rev.1.0