泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Solid State High Power Amplifier Systems

0.35-2GHz/30dB Gain/40dBm Psat/220V AC Model: TLPA0.35G2G-30-40-BC

TLPA0.35G2G-30-40-BC is a solid state high power amplifier systems provides high output power and high gain across the 0.35 to 2 GHz frequency range. The amplifier features a built-in 220V power supply, making it easy to use in most lab environments. This model features thermal self protection, preventing damage to the amplifier and providing added reliability.

Features:

- Frequency range: 0.35-2GHz
- Gain: 30dB Min
- Psat Output Power: 40dBm Min
- Protection:Over TEM,over voltage, over current ,over reflected protection
- 50 Ohm Matched Input / Output

电气特性 Electrical Characteristics:

参数 Parameter	代码 Symbol	Min	Typ	Max	单位 Units
频率范围 Frequency range	BW	0.35		2	GHz
功率增益 Power Gain	GP	30			dB
增益平坦度 Gain flatness	ΔGL		±3		dB
增益调节范围 Gain adjust Range	ΔGR	20			dB
增益调节步进 Gain adjust Step	ΔGS		0.5		dB
线性输出功率 Output P1dB	P1dB				dBm
饱和输出功率 Output Psat	Psat	40			dBm
杂散 Spurious@Pout=40dBm	Spur			-60	dBc
谐波 Harmonics@Pout=40dBm	HAM			-10	dBc
输入驻波 Input VSWR	VSWRin			1.8	:1
交流电压 AC Voltage	Vac		220		V AC
功耗 Power Consumption	Pdiss			150	W
阻抗 Impedance	I/O-IMP		50		Ohms

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
通信接口 Communication Connector	DB9/RJ45	
液晶显示屏 Front Panel LCD Screen Display	4 inch LCD Screen Display	
尺寸 Size	19 Inch 2U*550 depth	mm
重量 Weight	≤20	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

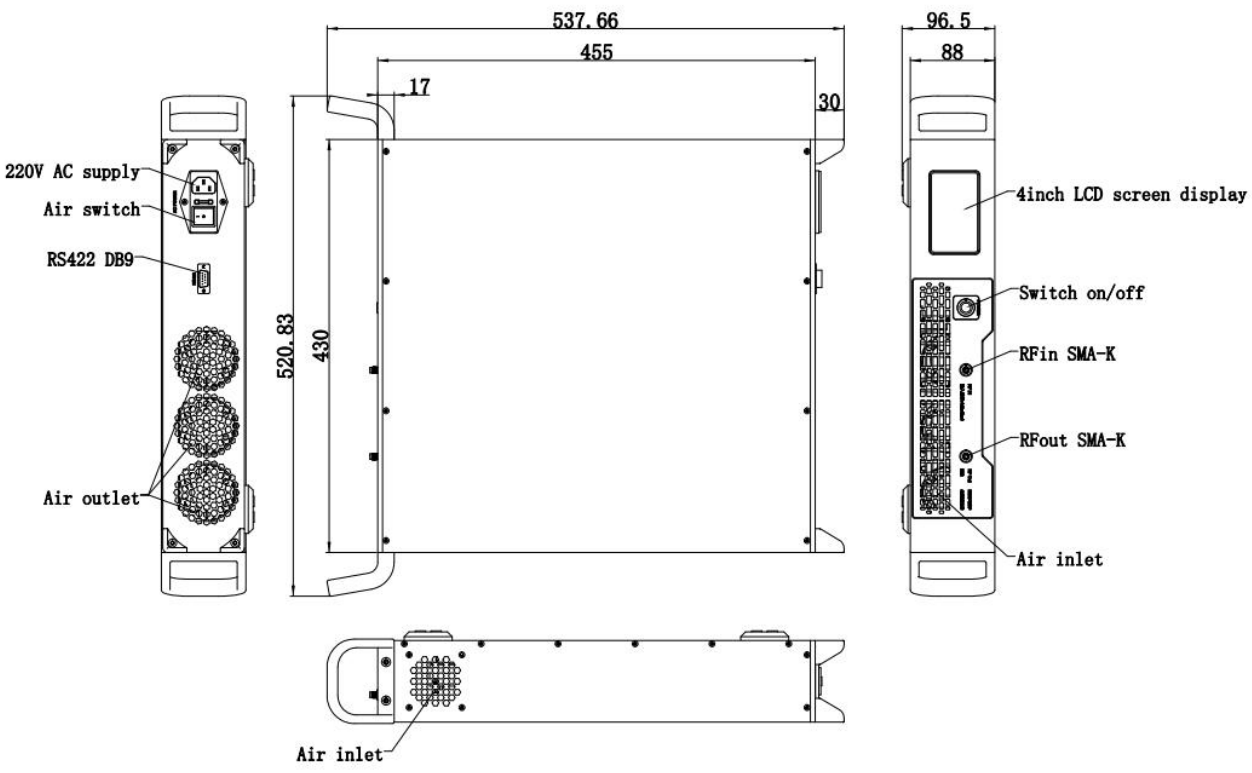

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

主要功能 Key Features:

参数 Parameter	特点 Advantages
显示功能 Display functions	Output power
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current 4, Over reflected
通信功能 Communication functions	1, Power setting on/off 2, Status query
冷却系统 Cooling system	Built in Cooling system,forced air cooling

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-20		+50	℃
存储温度 Non-operating Temperature*	-30		+60	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA0.35G2G-30-40-BC	Solid State High Power Amplifier Systems 0.35-2GHz, Gain:30dB,Psat:40dBm,220V AC,Built in Fan Cooling	Rev.1.0