泰莱微波 Talent Microwave

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

Waveguide Directional Coupler

WR-2.2/WR-2.2/10dB Coupling

Model: TC-330500-10-2.2

TC-330500-10-2.2 is a three-port waveguide directional coupler that delivers a 10 dB nominal coupling level and 25 dB typical directivity across the full waveguide band from 330 to 500 GHz. The interfaces of the directional coupler are WR-2.2 waveguides with UG-387/U anti-cocking flanges.

Features:

- Operating Frequency 330 to 500GHz
- Full Band Operation
- Low Insertion Loss
- Moderate Directivity

Applications:

- Test Labs
- Instrumentations
- Sub-assemblies

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
工作频率 Frequency Range	330		500	GHz
插损 Insertion Loss		3		dB
耦合度 Coupling		10		dB
耦合精度 Coupling Accuracy		±2		dB
隔离度 Isolation		35		dB
方向性 Directivity		25		dB
主线驻波 Main Line VSWR		1.1		:1
耦合口驻波 Coupling Port VSWR		1.1		:1


环境和机械特性 Envrionmental And Physical Characteristics:

参数 Parameter	指标 Value	单位 Units
操作温度 Operating Temerature	-40 To +85	℃
存储温度 Storage Temerature	-40 to +85	℃
RF接口 RF Connectors	WR-2.2/UG-387/U	
耦合接口 Coupled Port	WR-2.2/UG-387/U	
尺寸 Size	36*22*23	mm

Suzhou Talent Microwave,Inc
sales@talentmw.com
www.talentmw.com

外形图 Outline Drawing:

Unit:mm; Tolerance:±0.1mm

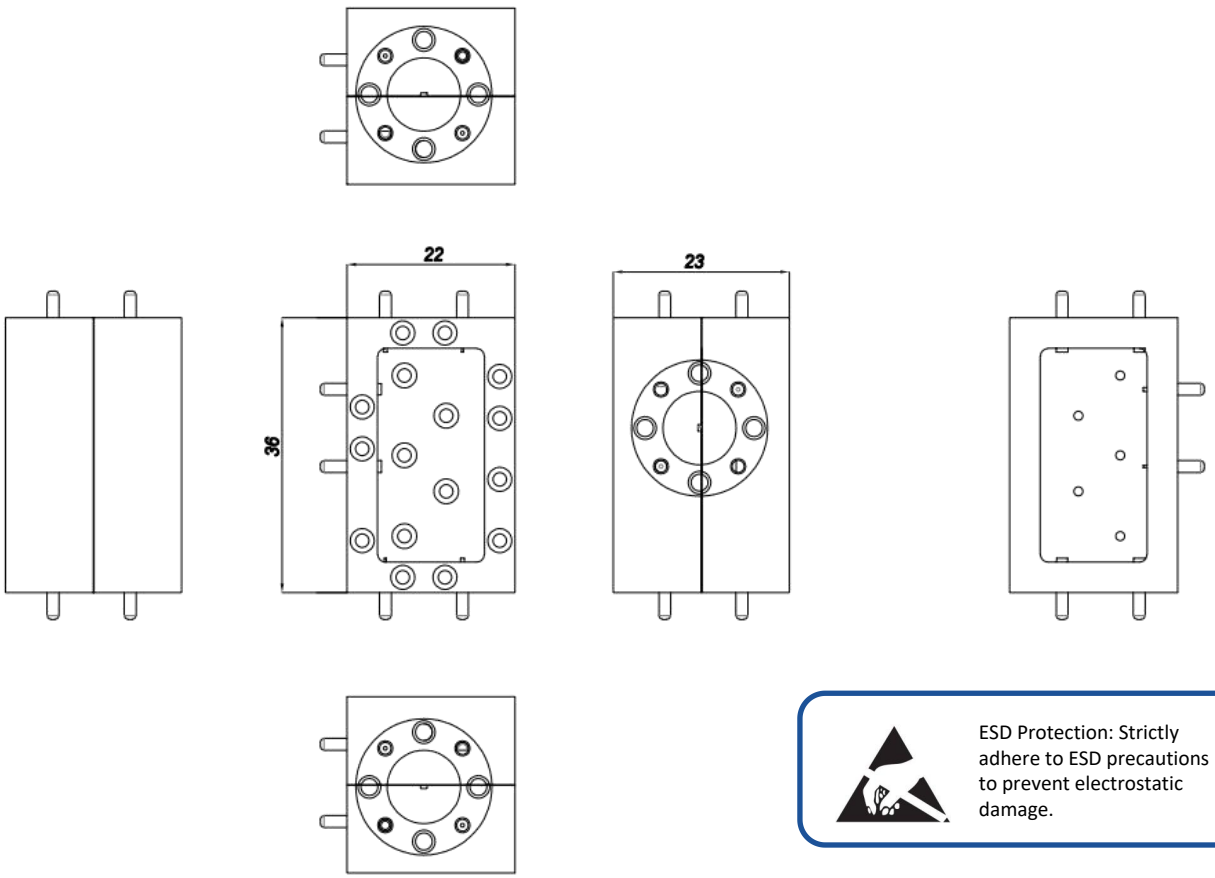

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TC-330500-10-2.2	Waveguide Directional Coupler, 330-500GHz, Coupling:10dB Typ, WR-2.2/UG-387/U	Rev.1.0