

Model:TLLA0.5G40G-28-50

Low Noise Amplifier
0.5-40GHz, NF:5.0dB, Gain:28dB,P1dB:17dBm

Feature:

- Ultra Wide Band: 0.5-40GHz
- Gain: 28dB Typ
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.5-40			GHz
增益 Gain	25	28		dB
增益平坦度 Gain Flatness		±2.0	±2.5	dB
噪声系数 Noise Figure		5.0		dB
线性输出功率P1dB		17		dBm
三阶交调 IP3		30		dBm
输入驻波 Input VSWR		1.8	2.5	:1
输出驻波 Output VSWR		1.8	2.5	:1
最大输入功率 Input Max Power			-5	dBm
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		400		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	2.92mm Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	35.3*40.3*12	mm
重量 Weight	/	g




绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	
输入功率 RF INPUT POWER	-5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(inches)

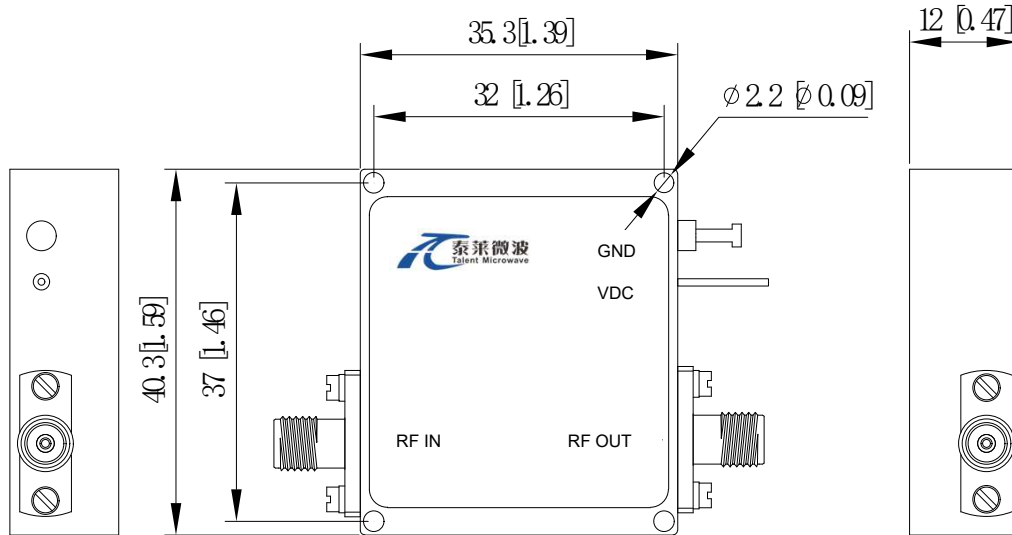

*****Heat Sink Required During Operation**



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLLA0.5G40G-28-50	Low Noise Amplifier, 0.5-40GHz, Noise Figure:5.0 dB, Gain:28 dB,P1dB:17dBm,12V DC,Without Heatsink	Rev.1.1
TLLA0.5G40G-28-50-HS	Low Noise Amplifier, 0.5-40GHz, Noise Figure:5.0 dB, Gain:28 dB,P1dB:17dBm,12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

P1dB VS. Frequency

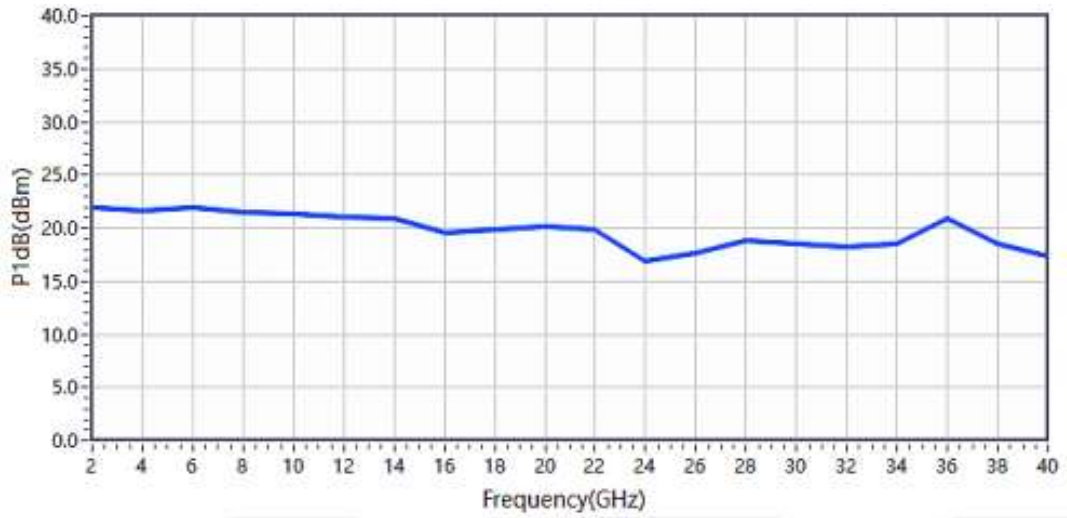

Gain&VSWR VS. Frequency

