

**Model: TLPA100K400M-52-52**
**Power Amplifier**
**100KHz-400MHz, Gain: 52dB, Psat: 52dBm**
**Feature:**

- Ultra Wide Band: 100KHz-400MHz
- Gain: 49dB Min
- Psat Output Power: 50 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

**电气特性 Electrical:**

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.1-400			MHz
增益 Gain	49	52		dB
增益平坦度 Gain Flatness		±3dB	±5dB	dB
线性输出功率P1dB	49	50		dBm
饱和输出功率Psat	50	52		dBm
谐波抑制@Pout=50dBm		-12		dBc
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage	26	28	30	V DC
直流电流 DC Supply Current		1.8	20	A
阻抗 Impedance	50			Ohms

**机械特性 Mechanical :**


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	DB9	
尺寸 Size	255X130X35	mm
重量 Weight	500	g


**绝对最大值 Absolute Maximum Ratings:**

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	30
输入功率 RF INPUT POWER	5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm

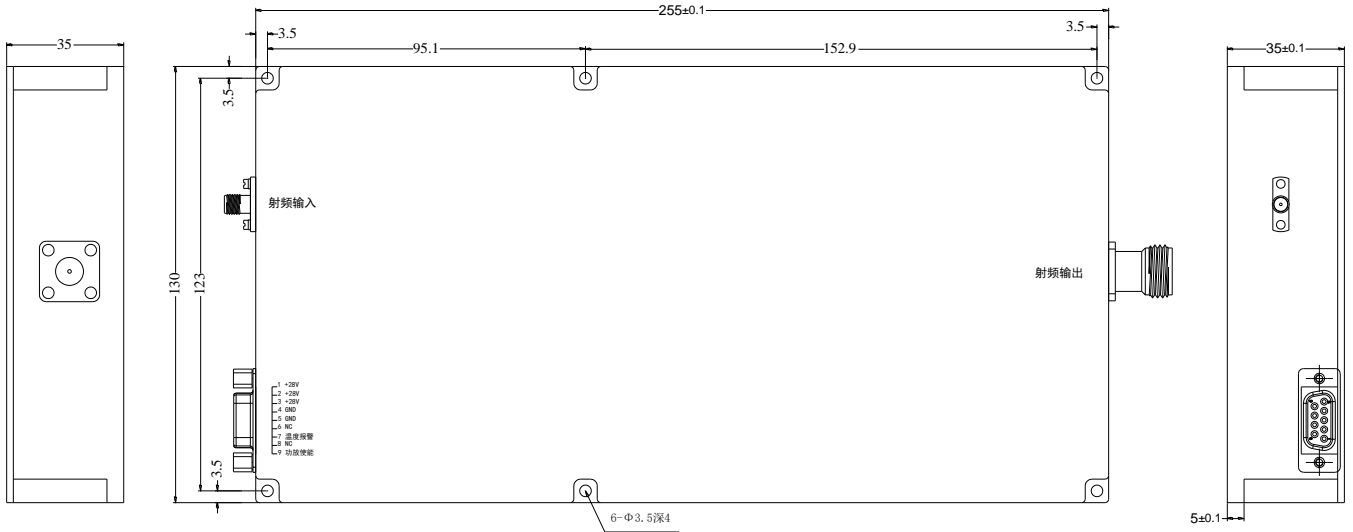

**\*\*\*Heat Sink Required During Operation**



OBSERVE PRECAUTIONS  
ELECTROSTATIC SENSITIVE  
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA100K400M-52-52	Power amplifier 100KHz-400MHz, Gain:52dB, Psat:52dBm, 28V DC, Without Heatsink	Rev.1.0
TLPA100K400M-52-52 -HS	Power amplifier 100KHz-400MHz, Gain:52dB, Psat:52dBm, 28V DC, With Heatsink	Rev.1.0