

Part No: TAXXA50-S-10


SMA Attenuators • Male to Female • DC – 10GHz - 50 W

电气特性 ELECTRICAL

• Frequency Range	DC – 4GHz	DC – 6GHz	DC – 8GHz	DC – 10GHz
• Attenuation (dB)	3-0.3/+0.3dB	3-0.4/+0.4dB	3-0.6/+0.6dB	3-0.8/+0.8dB
	6-0.3/+0.3dB	6-0.4/+0.4dB	6-0.6/+0.6dB	6-0.8/+0.8dB
	10.....-0.3/+0.3dB	10.....-0.4/+0.4dB	10.....-0.6/+0.6dB	10.....-0.8/+0.8dB
	20.....-0.3/+0.3dB	20.....-0.4/+0.4dB	20.....-0.6/+0.6dB	20.....-0.8/+0.8dB
	30.....-0.4/+0.4dB	30.....-0.5/+0.5dB	30.....-0.8/+0.8dB	30.....-1.0/+1.0dB
	40.....-0.5/+0.5dB	40.....-0.8/+0.8dB	40.....-1.0/+1.0dB	40.....-1.2/+1.2dB
• VSWR (MAX)	DC-4GHz....1.2: 1	DC-6GHz....1.3: 1	DC-8GHz....1.3: 1	DC-10GHz....1.35:1
• Impedance	50 Ohms			
• RF Power Rating	50Watts Average at 25°C			

机械特性 MECHANICAL

- Body Material:** Black, Finned Aluminum
- Center conductor:** Gold-plated, Phosphor bronze
- Connectors:** Nickel plated Brass
- Weight:** 245 g

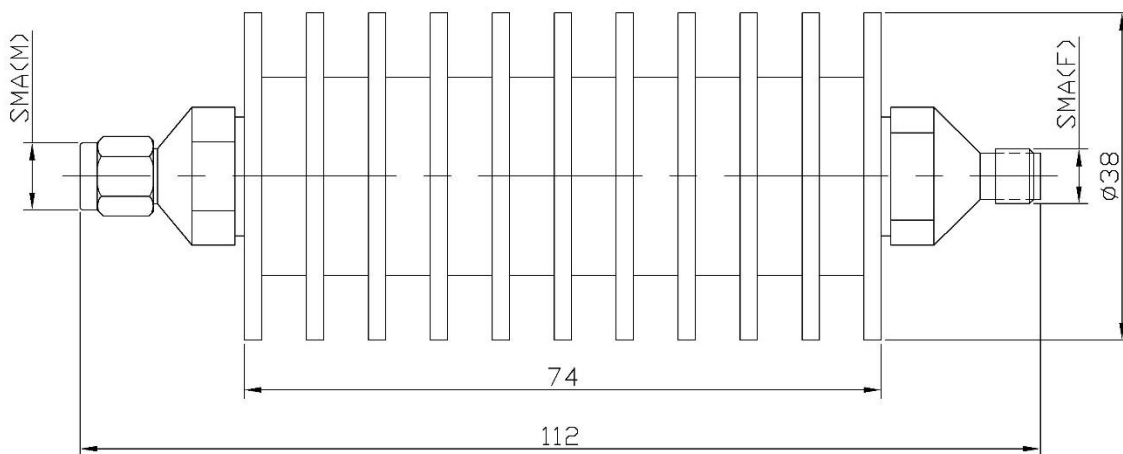

Unit:mm

订货信息 ORDER

TAXXA50-S-10
 ↓
 dB