

Part No.: TC-9K001-50N-2000

50dB Directional Coupler N-K/SMA-K 50Ω 0.009-100 MHz

电气特性 Electrical:


工作频率 Frequency Range: 0.009-100 MHz
 耦合度 Coupling:: 50 ± 2 db
 耦合平坦度 Coupling flatness: ± 2 dB
 插入损耗 Insertion Loss: ≤ 0.5 dB
 方向性 Directivity: : ≥ 18 dB
 驻波 VSWR: ≤ 1.3 dB
 耐功率 Power Handling: ≤ 2000 W (主线)
 阻抗 Impedance: 50 OHMS

机械特性 Mechanical:

温度范围 Temperature Range: -40° C - $+85^{\circ}$ C
 接口 Connectors: N-K/SMA-K
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

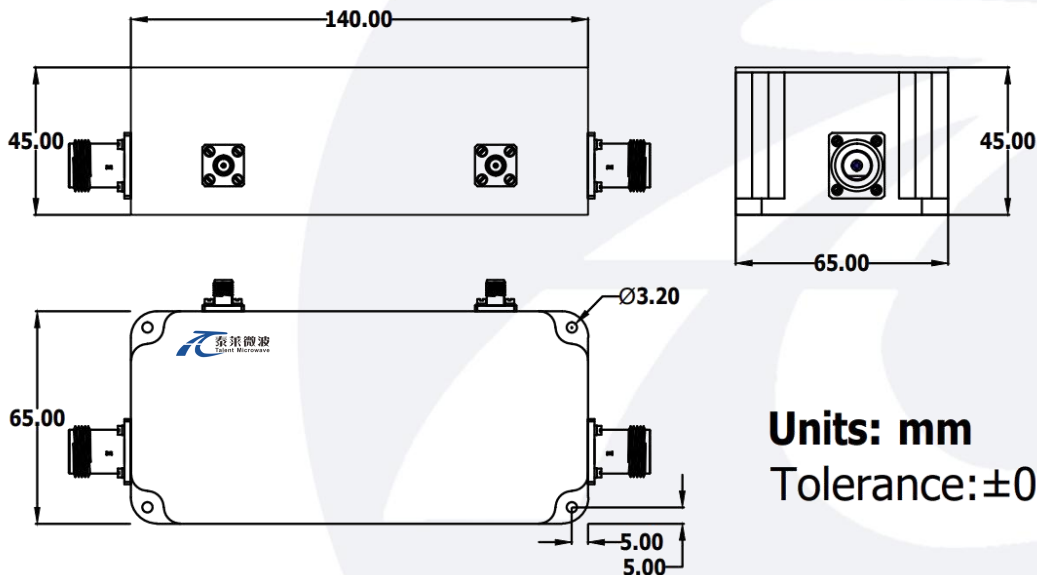

Units: mm
Tolerance: ± 0.3 mm