

Model: TMPA-210230-1510-04

Power Amplifier

210-230GHz, Psat:10.5 dBm, Gain:14 dB

Feature:

- Frequency Range: 210-230 GHz
- Gain:14 dBm Type
- Output Power Psat: 10.5 dBm Type
- Good Power and Gain Flatness

电气特性 Electrical:

| 参数Parameter | Min. | Typ. | Max. | 单位Units |
|------------------------|---------|------|------|---------|
| 频率范围 Frequency range | 210-230 | | | GHz |
| 增益 Gain | | 14 | | dB |
| 饱和输出功率Psat | | 10.5 | | dBm |
| 输入驻波 Input VSWR | | 2.0 | | :1 |
| 输出驻波 Output VSWR | | 3.0 | | :1 |
| 直流电压 DC Voltage | | +7 | | V DC |
| 直流电流 DC Supply Current | | 170 | | mA |

机械特性 Mechanical :

| 参数Parameter | 指标 Value | 单位Units |
|--------------------------------|---------------|---------|
| 输入输出接口 Input /Output Connector | WR-4/UG-387/U | |
| 直流偏置 Bias | Solder Pin | |
| 尺寸 Size | / | mm |
| 重量 Weight | / | g |




Available 220V System
Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

| 参数Parameter | 指标 Value |
|------------------------------|----------------------|
| 供电偏置电压 Supply Bias Voltage | TBD |
| 输入功率 RF INPUT POWER | TBD |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |

外形尺寸 Outline Drawing:

Unit: mm(Inches)

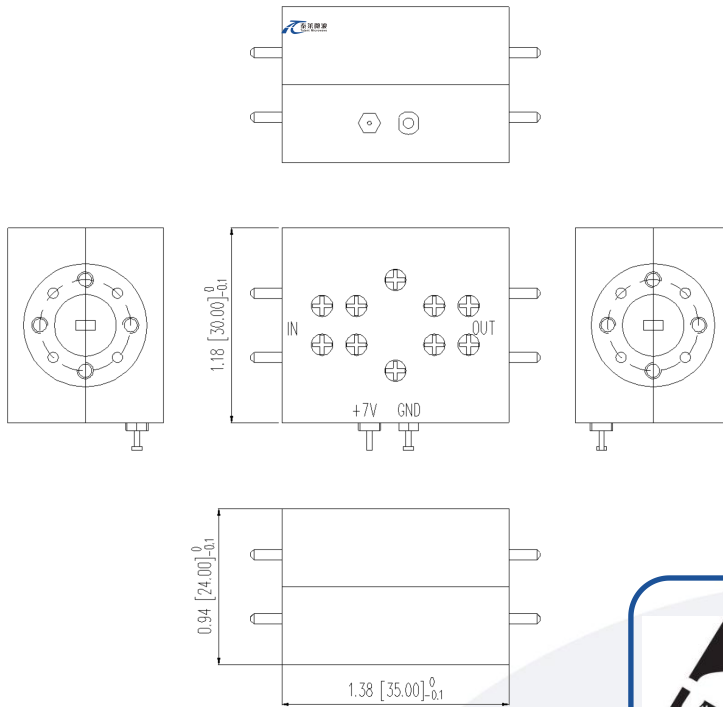

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

| 参数Parameter | Min. | Typ. | Max. | 单位Units |
|------------------------------------|---|------|------|---------|
| 操作温度 Operating Temperature | 0 | | +50 | °C |
| 存储温度 Non-operating Temperature | -45 | | +125 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 50,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

订货信息 Ordering Information:

| 标准型号 Part Number | 描述 Description | 版本号Revision |
|---------------------|--|-------------|
| TMPA-210230-1510-04 | Power Amplifier 210-230 GHz, Psat:10.5 dBm Type, Gain14 dBm Type,WR-4 | Rev.1.1 |