

Model:TMAM-060075-0406-12
**E-Band Active Multiplier
 X4, 60-75 GHz ,6 dBm Output Power,**
Feature:

- Output Frequency: 60-75GHz
- Output Power : 6dBm Typ
- Low power consumption

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
输出频率 Output Frequency	60		75	GHz
输出功率 Output Power	5	6	7	dBm
输入频率 Input Frequency	15		18.75	GHz
输入功率 Input Power	3	5	7	dBm
倍频次数 Multiply Factor		4		dB
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
供电电压 DC Voltage		6		V
供电电流 DC Supply Current		210		mA

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输出接口 Output Connector	WR-12/UG-387	
输入接口 Input Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	45*42*24	mm

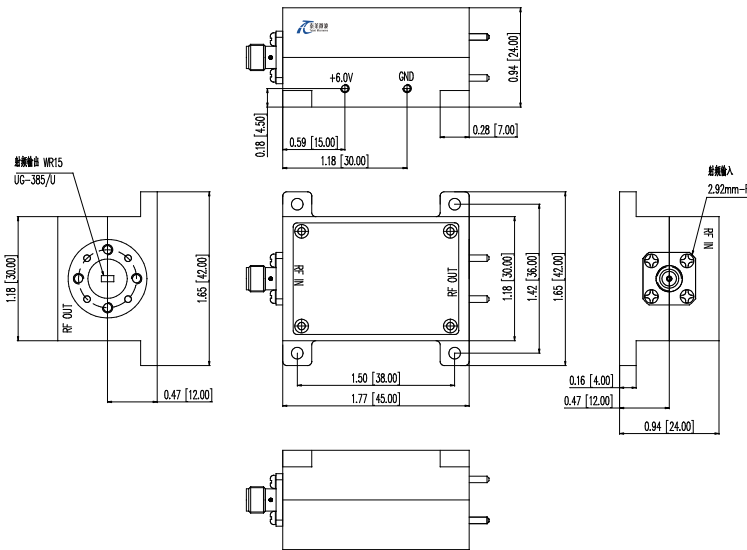

 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF INPUT POWER	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: Inches(mm)



OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TMAM-060075-0406-12	E-Band Active Multiplier X4, 60-75 GHz ,6 dBm Output Power, WR-12	Rev.1.1