

**Model:TLLA0.5G67G-25-50**
**Low Noise Amplifier**
**0.5-67GHz, NF:5.0dB, Gain:25dB,P1dB:15dBm**
**Feature:**

- Ultra Wide Band: 0.5-67GHz
- Gain: 25dB Typ
- Noise Figure: 5.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

**电气特性 Electrical:**

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range		0.5-67		GHz
增益 Gain		25		dB
增益平坦度 Gain Flatness		±2		dB
噪声系数 Noise Figure		5.0		dB
线性输出功率P1dB		15		dBm
输出三阶交调 Output IP3		20		dBm
输入驻波 Input VSWR		2.0		:1
输出驻波 Output VSWR		2.0		:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		100		mA
阻抗 Impedance		50		Ohms

**机械特性 Mechanical :**

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	1.85mm Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	44.8*29.2*11	mm
重量 Weight	/	g



 Available 220V System  
 Benchtop Amplifier

**绝对最大值 Absolute Maximum Ratings:**

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12V
输入功率 RF INPUT POWER	10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

**外形尺寸 Outline Drawing:**

Unit: mm(inches)

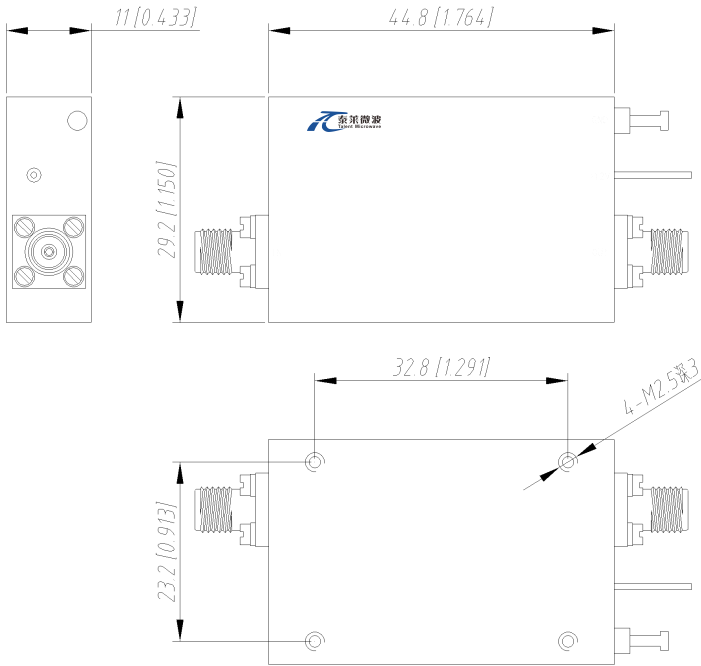

**\*\*\*Heat Sink Required During Operation**

**温度环境 Environmental Conditions:**


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-40		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**


标准型号 Part Number	描述 Description	版本号Revision
TLLA0.5G67G-25-50	Low Noise Amplifier, 0.5-67GHz, Noise Figure:5.0 dB, Gain:25 dB,P1dB:15dBm,12V DC,Without Heatsink	Rev.1.1
TLLA0.5G67G-25-50-HS	Low Noise Amplifier, 0.5-67GHz, Noise Figure:5.0 dB, Gain:25 dB,P1dB:15dBm,12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Gain&VSWR vs Frequency

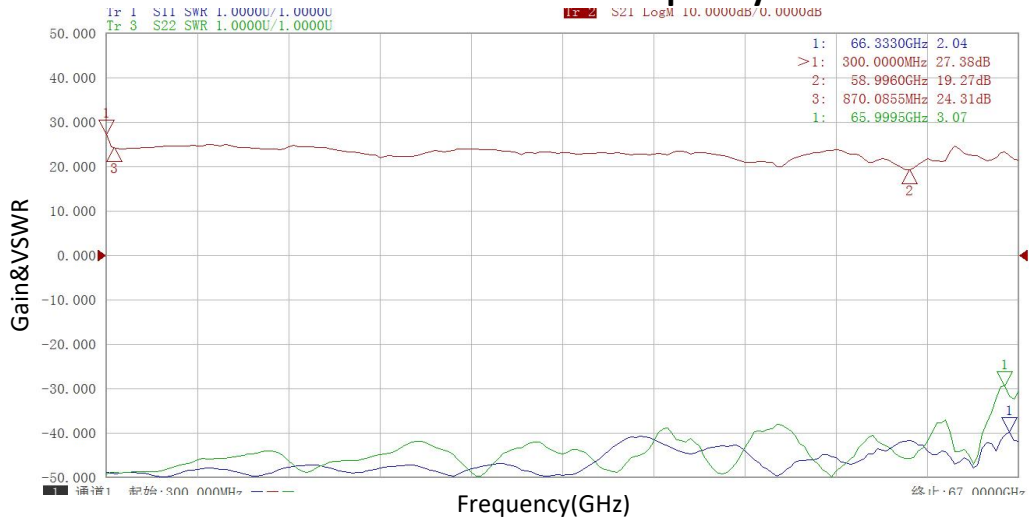

Noise Figure vs Frequency

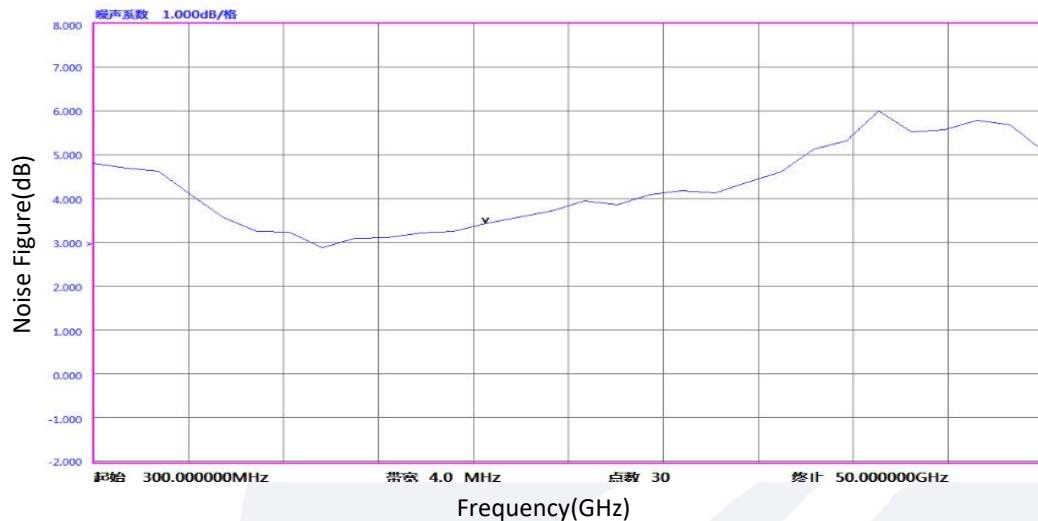

Gain vs Output Power

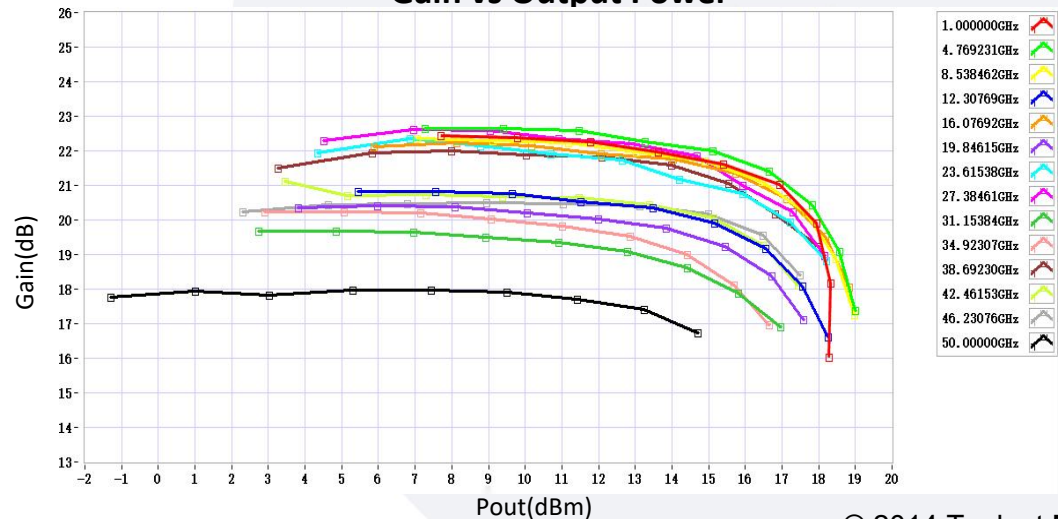

典型曲线 Typical Performance Data:

P1dB vs Frequency

