

Model:TLPA18G40G-47-48-BC
**Solid State High Power Amplifier Systems
 18-40GHz,Gain:47dB,Psat:48dBm,220V AC**
Feature:

- Ultra Wide Band: 18-40GHz
- Gain: 47dB Min
- Psat Output Power: 48dBm
- Protection:Over TEM,over voltage, over current ,over VSWR protection.
- 50 Ohm Matched Input / Output


电气特性 Electrical:


参数Parameter	代码Symbol	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	BW	18-40			GHz
增益 Power Gain	Gp	47			dB
增益平坦度Gain flatness	Δ GL		\pm 5		dB
饱和输出功率 Psat	Psat	47	48		dBm
ALC 精度	ALC			\pm 0.5	dB
输入功率 Input Power	Pin		0	10	dBm
杂散 Non-Harmonic Spurious	Spur	50			dBc
谐波Harmonics	HM	15			dBc
输入驻波 Input VSWR	VSWRin			2.0	:1
交流电压 AC Voltage	Vac	220/50Hz			V AC
功耗 Power Consumptio	Pdiss			1800	W
阻抗 Impedance	I/O-IMP	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入 接口Input Connector	2.92mm Female	
输出接口 Output Connector	WR180	
通信接口Communication Interfaces	RJ45/DB9	
尺寸 Size	19 Inch 5U*550mm	
重量 Weight	35	Kg

外形尺寸 Outline Drawing:

Unit: mm(Inches)

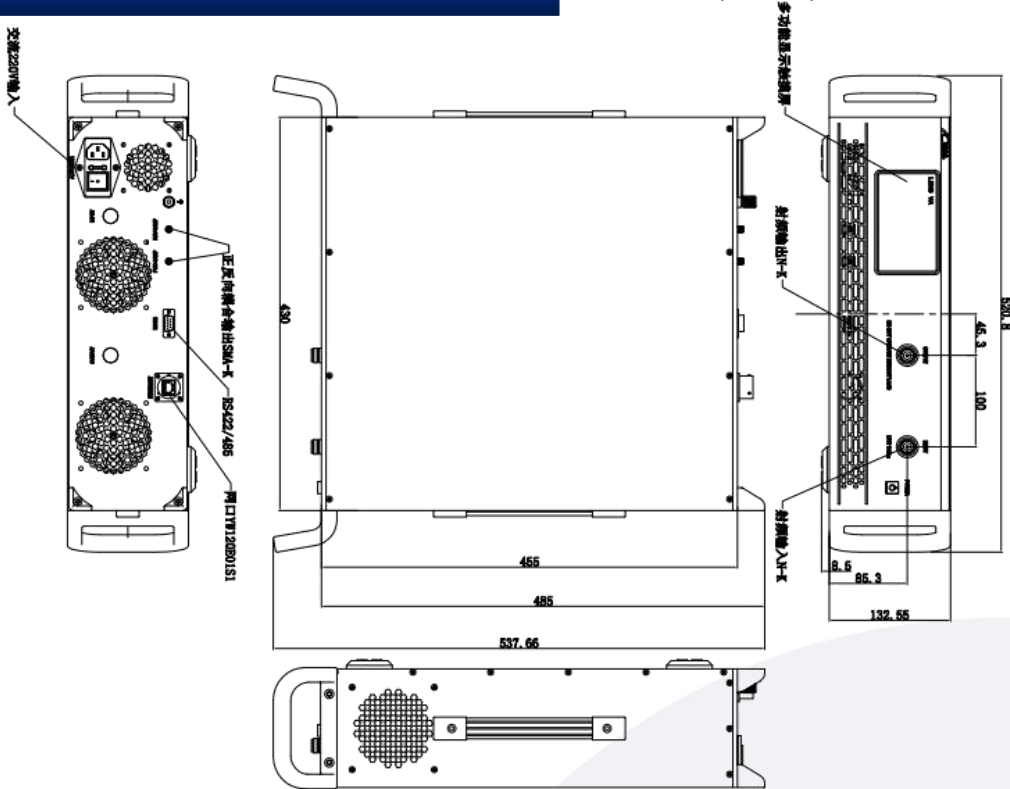

主要功能 Key Features:

参数 Parameter	特点 Advantages
控制 Control	RS422/LAN
控制功能 Control functions	1, Power setting On/Off 2, P _{sat} Adjust
内置保护功能 Protection functions	1, Over TEM 2, Over voltage 3, Over current protection 4, Over VSWR protection
冷却系统 Cooling system	Front to back forced air cooling fans makes this ideal for usage in test equipment racks

温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-20		+50	°C
存储温度 Non-operating Temperature	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLPA18G40G-47-48-BC	Solid State High Power Amplifier Systems, 18-40GHz,Gain:47dB,Psat:48dBm,220V AC	Rev.1.0