

Model:TLLA0.1G26G-28-50
Low Noise Amplifier
0.1-26GHz, NF:4.0dB, Gain:28dB,P1dB:21dBm
Feature:

- Ultra Wide Band: 0.1-26GHz
- Gain: 28dB Typ
- Noise Figure: 4.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	0.1-26			GHz
增益 Gain	27	28		dB
增益平坦度 Gain Flatness		±2.5	±3.0	dB
噪声系数 Noise Figure		4.0	6.0	dB
线性输出功率P1dB	18	21		dBm
输出三阶交调Output IP3		30		dBm
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		360		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value	单位Units
输入输出接口Input /Output Connector	2.92mm-Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	35*40*12	mm
重量 Weight	60	g



 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF INPUT POWER	-5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm(Inches)

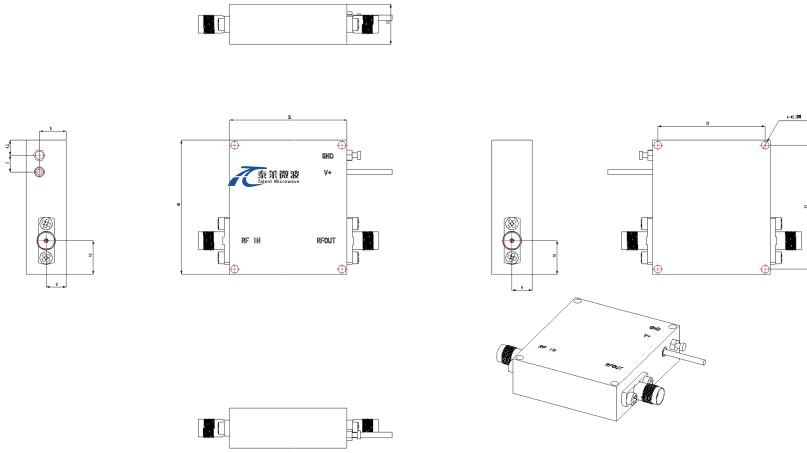

OBSERVE PRECAUTIONS
ELECTROSTATIC SENSITIVE
DEVICES

*****Heat Sink Required During Operation**

温度环境 Environmental Conditions:


参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-40		+75	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
TLLA0.1G26G-28-50	Low Noise Amplifier, 0.1-26GHz, Noise Figure:4.0 dB, Gain:28 dB,P1dB:21dBm,12V DC,Without Heatsink	Rev.1.1
TLLA0.1G26G-28-50-HS	Low Noise Amplifier, 0.1-26GHz, Noise Figure:4.0 dB, Gain:28 dB,P1dB:21dBm,12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:


Gain&VSWR vs Frequency

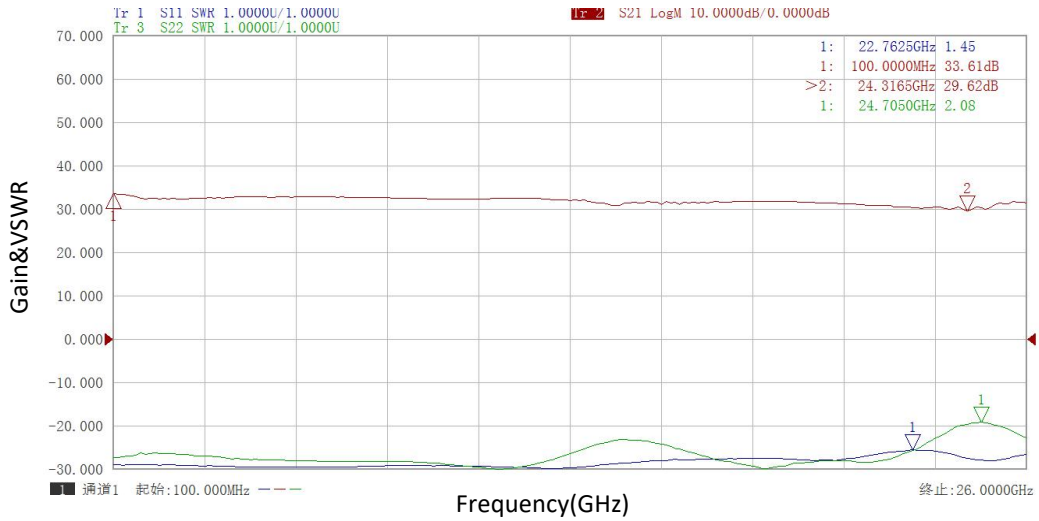

Noise Figure vs Frequency

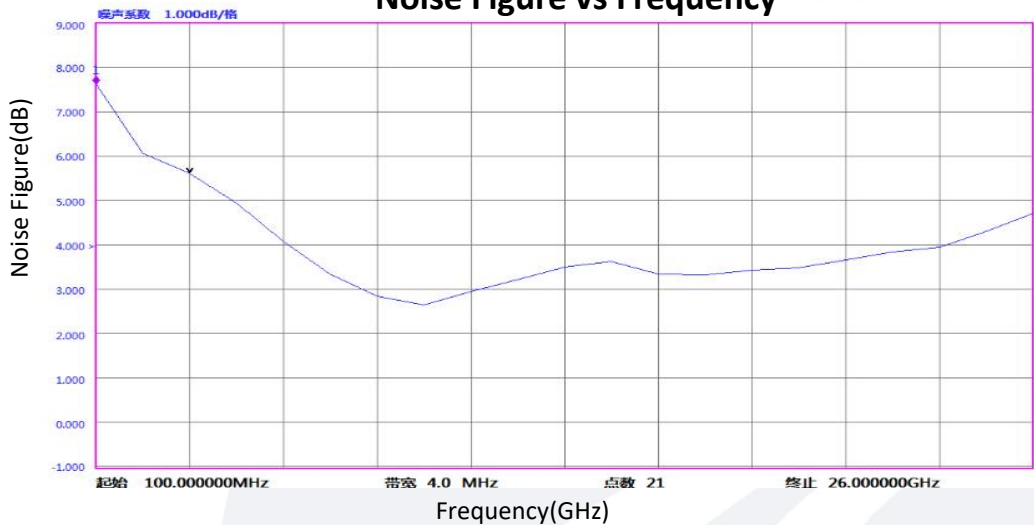

Gain vs Output Power

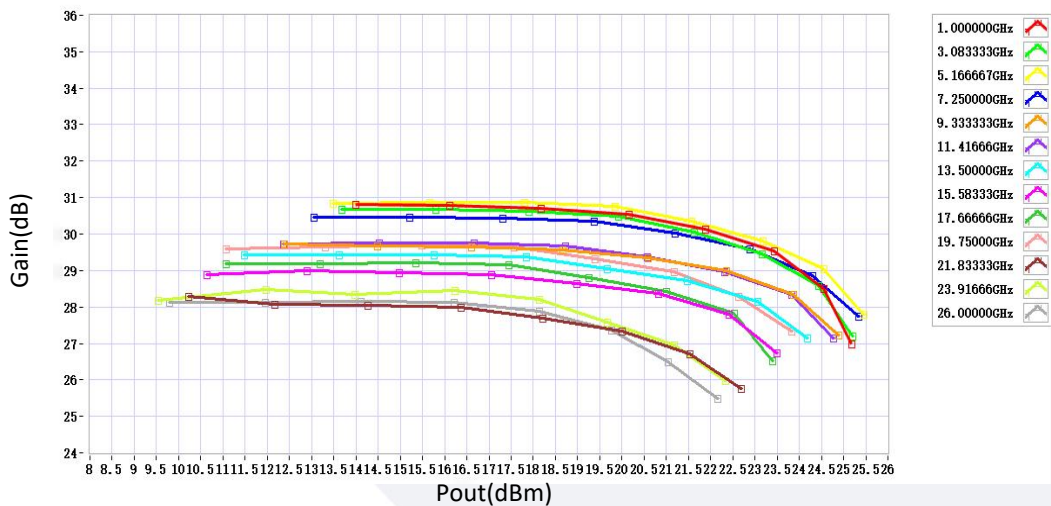

典型曲线 Typical Performance Data:

