

Model:TLLA4G8G-21-09
Low Noise Amplifier
4-8GHz, NF:0.9dB, Gain:21dB,P1dB:17dBm
Feature:

- Ultra Wide Band:4-8GHz
- Gain: 21dB Typ
- Noise Figure:0.9dB Typ
- Unconditional stability
- 50 Ohm Matched Input / Output

电气特性 Electrical:

参数Parameter	Min.	Typ.	Max.	单位Units
频率范围 Frequency range	4-8			GHz
增益 Gain	20	21		dB
增益平坦度 Gain Flatness		±1.0		dB
噪声系数 Noise Figure		0.9	1.2	dB
线性输出功率P1dB	16	17		dBm
饱和功率Psat	17	18		dBm
输入驻波 Input VSWR		2.0		: 1
输出驻波 Output VSWR		2.0		: 1
直流电压 DC Voltage	+5.5	+8	+12	V DC
直流供电 DC power supply		50		mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical :

参数Parameter	指标 Value
输入输出接口 Input /Output Connector	SMAFemale
直流偏置 Bias	Solder Pin
尺寸 Size	24mm*16mm*10mm
重量 Weight	/

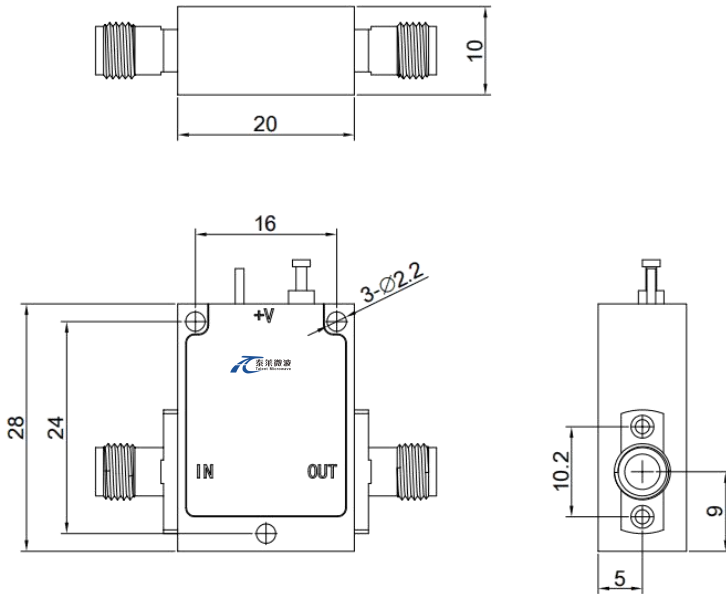

 Available 220V System
 Benchtop Amplifier

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF INPUT POWER	+10 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形尺寸 Outline Drawing:

Unit: mm



Heat Sink required during operation



温度环境 Environmental Conditions:

参数Parameter	Min.	Typ.	Max.	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TLLA4G8G-21-09	Low Noise Amplifier,4-8GHz,Noise Figure:0.9dB, Gain:21 dB,P1dB:17dBm,12V DC,Without Heatsink	Rev.1.1
TLLA4G8G-21-09-HS	Low Noise Amplifier,4-8GHz,Noise Figure:0.9dB, Gain:21 dB,P1dB:17dBm,12V DC,With Heatsink	Rev.1.1